



SBC-002-316-001

UNBUNDLED NETWORK ELEMENTS EQUIPMENT INSTALLATION FOR THE C.O.

Abstract

Presented in this document are the methods and procedures to implement UNE Methods 1-2-3 in the SBC Central Office environment.

Audience: SBC ILEC Space Planners, Frame Planners, Transport Equipment Engineers (TEE), Long Range Technical Planners. The secondary audience within the SBC Local Exchange Carriers is the Network Operations/Local Field Operations (LFO), Corporate Real Estate (CRE), Network Sales Support (NSS) and the Collocation Services organizations.

Effective Date: January 8, 2001

Date Issued: Issue 2.1, January 8, 2001

Expires On: N/A

Related Documents: See Reference Section of this document.

Canceled Doc: Supersedes UNE Deployment in the Central Office M&P and Issue 1, Nov 1998, Issue 1.0 & 2.0 of this document.

Issuing Dept: SBC Services, Network Planning & Engineering

Business Unit: Network

Documents Coordinator: Steve Weinert – 214 858-1355

Author(s):

Steve Weinert – 214 858-1355, E-Mail: sw0872@txmail.sbc.com.

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

UNE Equipment Installation for the C.O.

TABLE OF CONTENTS

1. REASON FOR REISSUE	1
2. INTRODUCTION.....	1
3. HOW THE UNE METHODS ARE DEPLOYED WITHIN THE C. O.....	2
UNE Method 1.....	2
UNE Method 2.....	3
UNE Method 3.....	7
4. METHODS OF INTERCONNECTION	7
5. OPERATIONAL SUPPORT SYSTEMS	10
Connecting Facility Assignment.....	10
TIRKS.....	11
SWITCH.....	11
6. CENTRAL OFFICE PLANNING	11
7. FUNDING	16
8. REFERENCES.....	17
9. CONTACT NAMES	19
SBC Corporation Contacts.....	19
Major Manufacturer Contacts.....	19
10. COPYRIGHT PAGE	19

UNE Equipment Installation for the C.O. SBC-002-316-001

1. REASON FOR REISSUE

Issue 2.1, Section 8: Reference Section updated in its entirety.

Issue 2.1, Section 9: Contact List Updated.

Issue 2.1, Section 10: Copyright Section Added.

This document replaces the UNE Deployment in the Central Office, Issue 1, November 1998 in its entirety. This prior document was discontinued.

2. INTRODUCTION

This is the Method and Procedure has been developed to support the upgraded Access to Unbundled Network Element Provisioning for the SBC ILEC Central Office. This section is a recapitulation of the definition and standards of Unbundled Network Elements as specified in other documentation. It has been restated here for points of reference.

General Overview - Access To UNE's

Unbundled Network Elements (UNE's) are network elements that SBC must offer to comply with the FCC August 8, 1996 Order in CC Docket No. 96-98 implementation of the Local Competition Provisions in the Telecommunications Act of 1996 (Order) interpreting the Telecommunications Act of 1996 (96 Act).

The order specifically requires Local Exchange Carriers to provide network elements on an unbundled basis to any telecommunications carrier. The 8th Circuit Court's Opinion, issued in 1997, reaffirmed SBC's position that the CLEC customer must perform the physical work associated with combining SBC UNE's to establish a telecommunication service. Section 2 of this Marketing Product Description will address the three methods SBC makes available to CLEC customers to gain access to SBC UNE's for the purpose of combining those UNE's with other SBC UNE's to create a telecommunications service. SBC UNE's may be combined by the CLEC customer with other SBC UNE's. Physical collocation and virtual collocation are provisioned for the purpose of CLEC customer's interconnecting with SBC's network. Access to UNE's is provided to allow the CLEC customer the following methods to combine multiple SBC-provided UNE's. This product description covers Access to UNE's. Subject to availability of space and equipment, CLEC may use the methods listed below to access and combine loops, switch ports, and dedicated transport within a requested **SBC-13STATE** Central Office.

Method 1

SBC-13STATE will extend **SBC-13STATE** UNEs requiring cross connection to the CLEC's Physical Collocation Point of Termination (POT) when the CLEC is Physically Collocated, in a caged, cageless or shared cage arrangement, within the same Central Office where the UNEs which are to be combined are located.

Method 2

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

SBC-13STATE will extend **SBC-13STATE** UNEs that require cross connection to the CLEC's UNE frame located in the common room space within the Central Office where the UNEs which are to be combined are located.

Method 3


SBC-13STATE will extend **SBC-13STATE** UNEs to the CLEC's UNE frame that is located outside the **SBC-13STATE** Central Office where the UNEs are to be combined in a closure such as a cabinet provided by **SBC-13STATE** on **SBC-13STATE** property.

Important
The 5 Methods of UNEs were revamped to the 3 Methods of Access to UNEs in late 1999 but still must be upgraded to reflect the following: Method 1 will have cageless collocation added, Method 2 will only be offered in the Central Office Collocation Area or a new area will be created which will become a second Collocation Area at the same site, and Method 3 will be offered in a SBC owned area that has existing space for the placement of a cross-connect field. This document will proceed with these assumptions in place.

3. HOW THE UNE METHODS ARE DEPLOYED WITHIN THE C. O.

UNE Method 1

UNE Method 1 can be characterized as the standard Collocation installations where the CLEC has physically placed their equipment into the ILEC Central Office in a Caged, Cageless or Shared Cage arrangement. **This Method is not available for Virtual Collocation.** The CLEC has required the extension of cabling through an (optional) Point of Termination (POT) to the ILEC Frame, DSX or FDF. These Carrier Facility Assignment (CFA) terminations located on the ILEC family of frames is used as the termination cross-connect point and test access point for the CLECs services. In UNE Method 1, the CLEC may request two ILEC provided Unbundled Network Elements and connect them within their CLEC physical space. Below illustrates an example of a POTS line connecting the Switch with the Cable Pair:

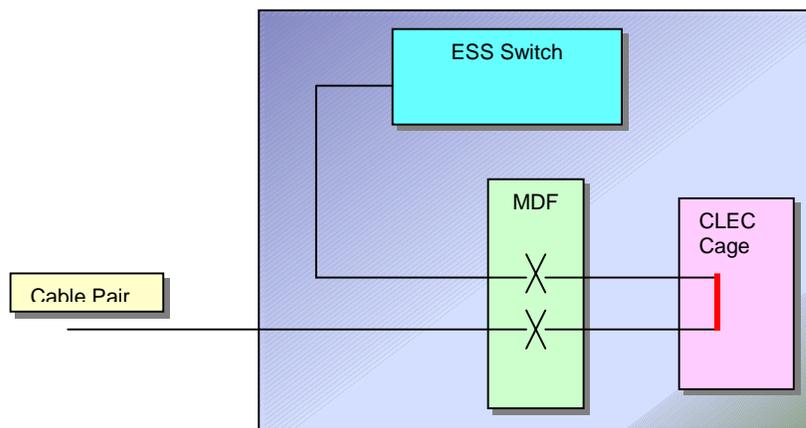

POTS Switch Port and Cable Pair connected using UNE Method 1 within the CLEC Physical Collocation Area. The CLEC connection is annotated in **RED**.


Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

UNE Method 2

UNE Method 2 requires that the ILEC install a new set of interconnection points within the Central Office for this purpose. The CLEC will not be required to have equipment or physical collocation within that Central Office location. This M&P will be used to obtain a reasonable and consistent estimate of the number of SUT frames that can be allocated within a Collocation Common Area. Depending on the actual amount UNE interconnection equipment frames used by each CLEC, the number of frames supported by each common collocation area may be slightly more or less than planned. Frames for each type of service application will only be installed at such time that the first Collocation request is provided.

The floor plan layout for UNE Method 2 will be placed in a logical and reserved floor space manner to provide for an ultimate frame growth of 7 relay racks per SUT bay/frame. The frames will be placed side by side with the DS0/VF POTS Frame being placed up against the Eligible Structure (cage wall). Each Bay/Frame will have the minimum frame lineup placed per service type with the initial request and will be grown incrementally as the service needs dictate. All SUT Frames will utilize 3'0" front aisles and 2'6" rear aisles. See each Frame Type Section for further details.

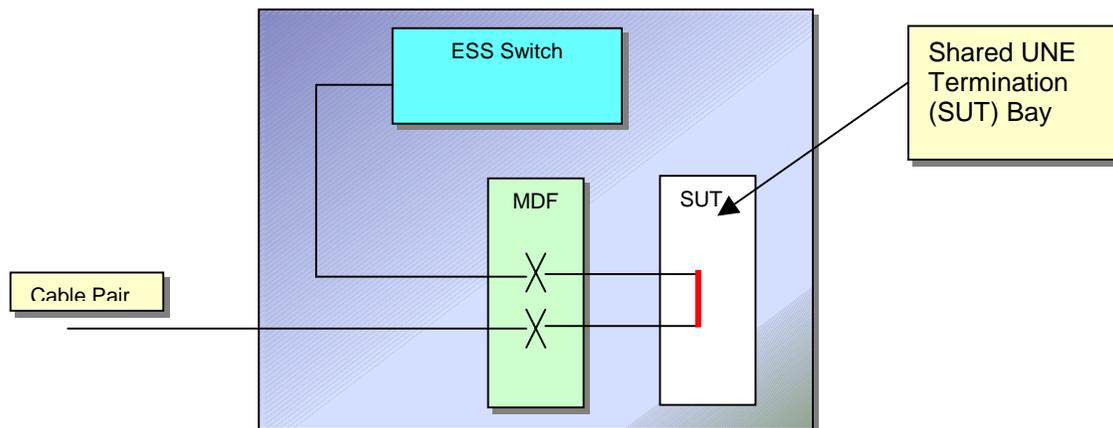

POTS Switch Port and Cable Pair connected using UNE Method 2 to a Shared UNE Termination Bay within the Collocation Area. The CLEC connection is annotated in **RED**.

With the first Collocation Request, the ILEC has 110 days to install, cable and equip the following Shared UNE Termination (SUT):


- Single Sided Bay Frame for DS0/xDSL/ADSL services that is cabled back to the ILEC Intermediate Distribution Frame (IDF).
- DSX-1 Bay
- DSX-3 Bay
- Fiber Distribution Bay

The UNE Frames are **not** intended or designed to accommodate the interconnection between one CLEC and another. The CLEC that desires to interconnect may cable directly to each other with the cabling being provisioned by either the CLEC or the ILEC. The UNE SUT Frames are provided for the CLEC to interconnect to the ILEC only.

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.


The ILEC will make only panel and block assignments on the frames for the placement of blocks on the frames. The only facility assignments on a pair by pair or coax connector basis will be the ILEC UNE's terminated on the UNE Frame from the ILEC network.

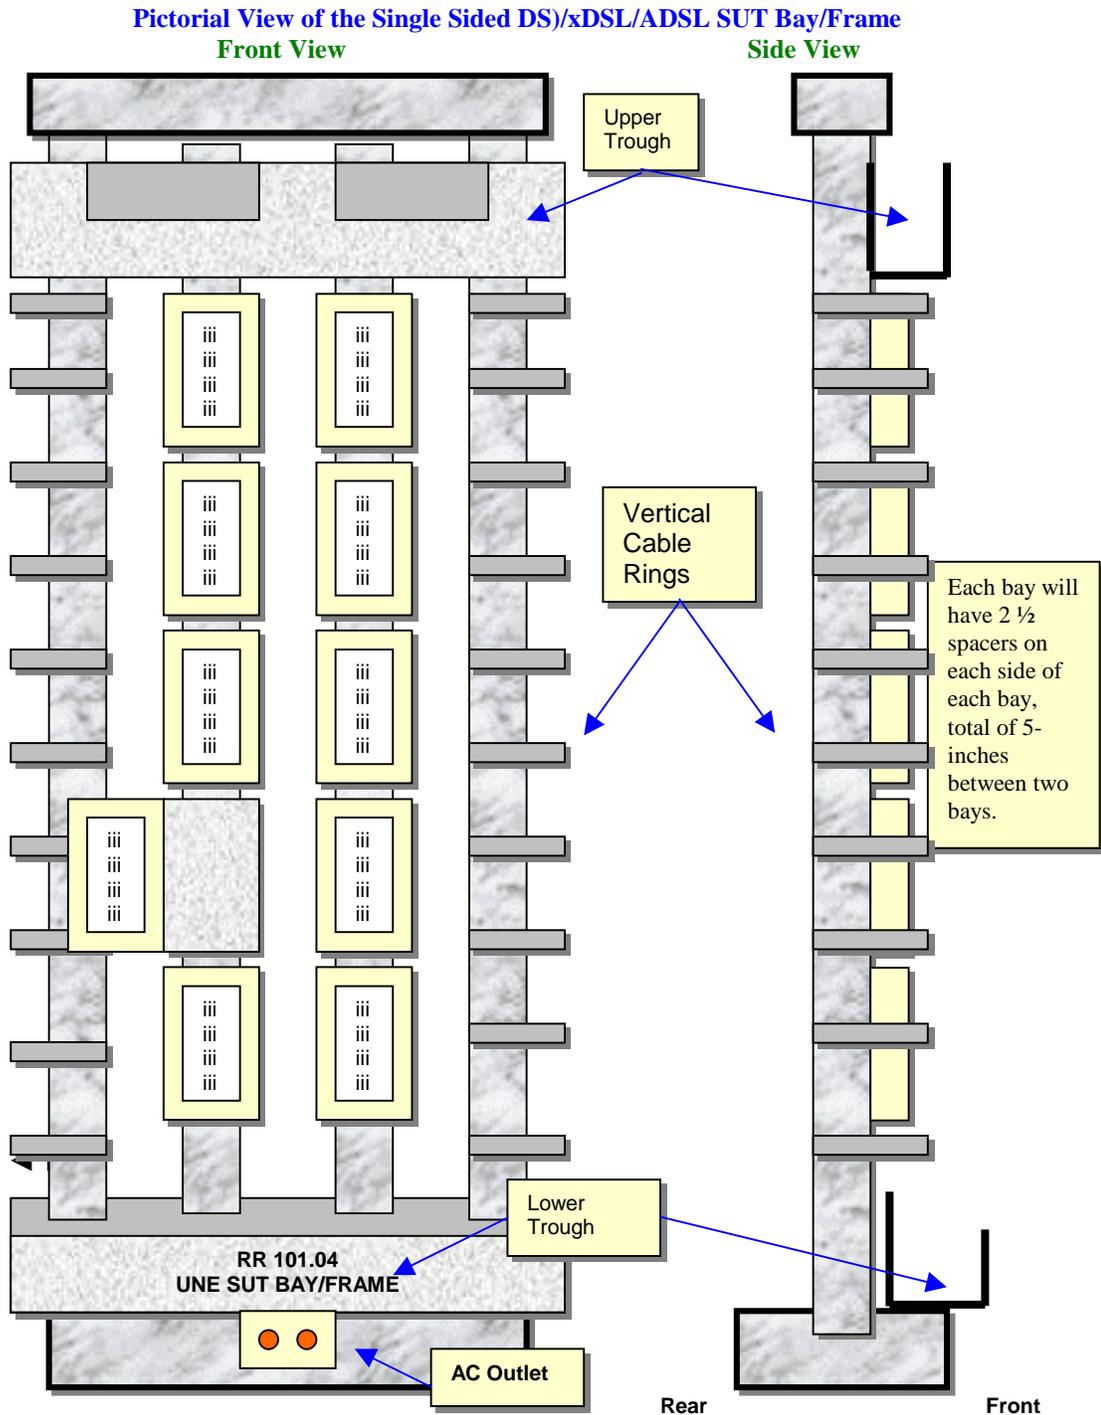

This illustration shows how a DS0 Collocation Bay/Frame is arranged. The equipment will fit within a standard bay footprint and may be placed in an existing Cageless Collocation Lineup.

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

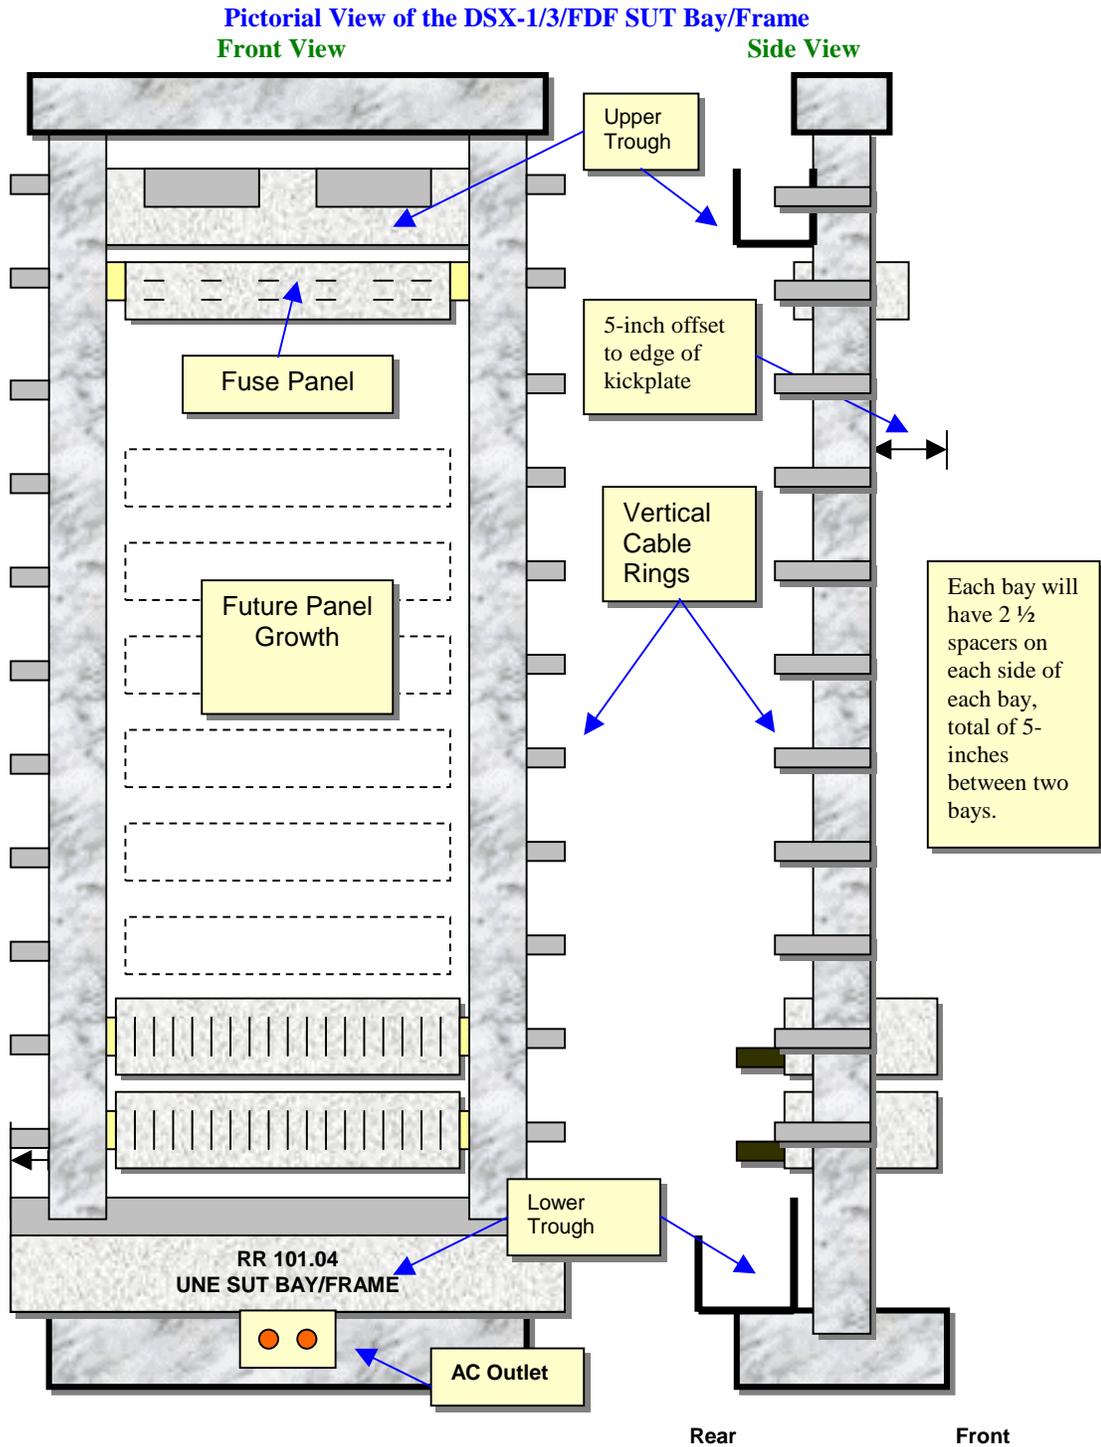


This illustration shows the typical layout of a standard DSX-1/3 or FDF Frame layout. Reference the standard SBC Drawings for the bay, troughs, rings and panels for deployment. The bay/frame will fit within an existing Cageless Collocation Lineup in a standard bay configuration.

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

Collocation Area Site Conditioning Buildout

UNE Frame Deployment using Recommended Spacing

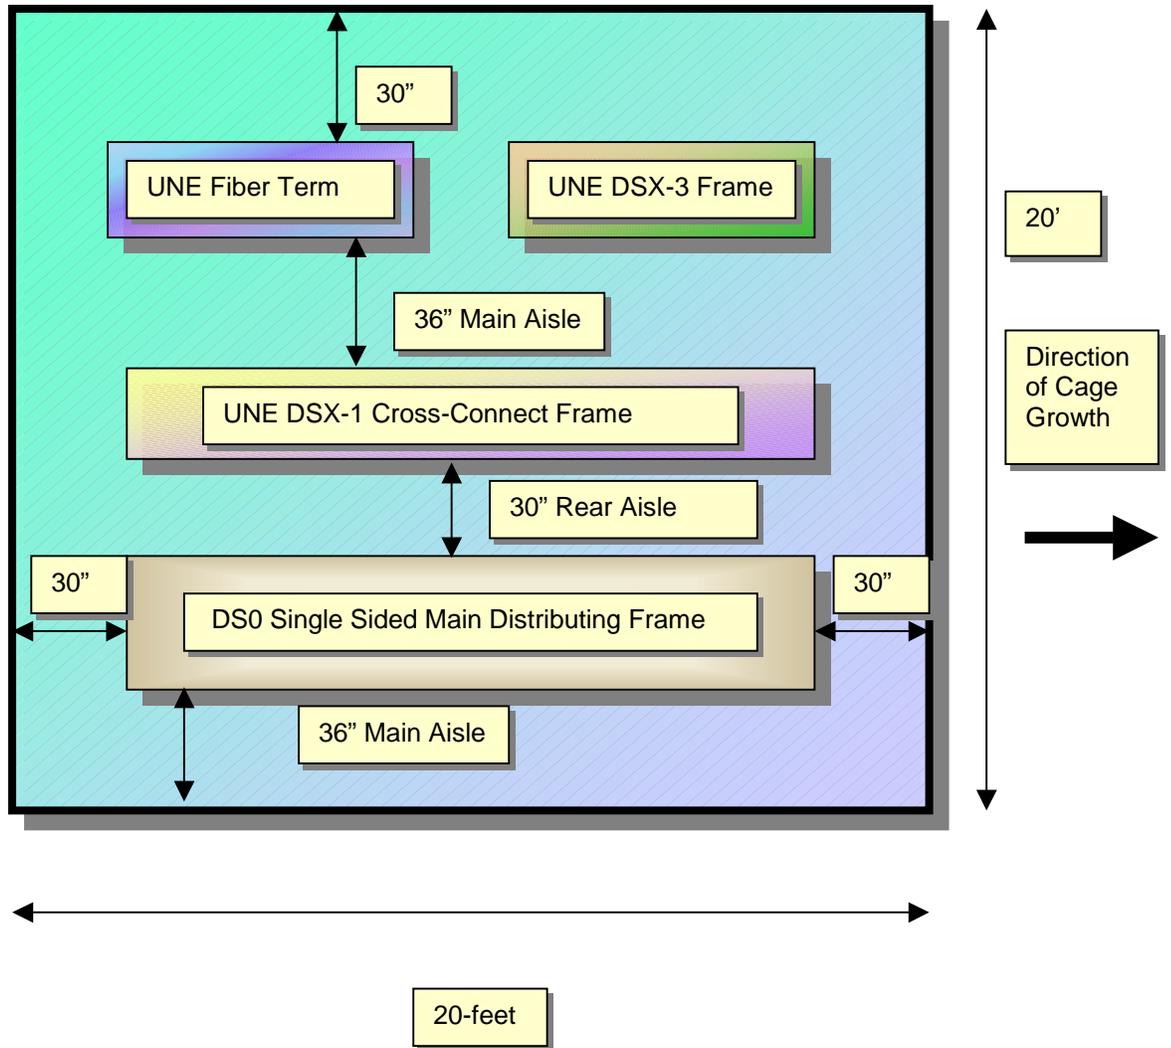


Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

UNE Method 3

UNE Method 3 is used by the Collocator to connect two UNEs at a point outside of the SBC Central Office on SBC owned property. This arrangement is used when there is not a capability for the ILEC to provision a SUT cross-connect bay/frame within the Central Office. This option is anticipated to be used at such time the Central Office is blocked or restricted from offering the UNE Method 2 potentially when space for a bay/frame is not available.

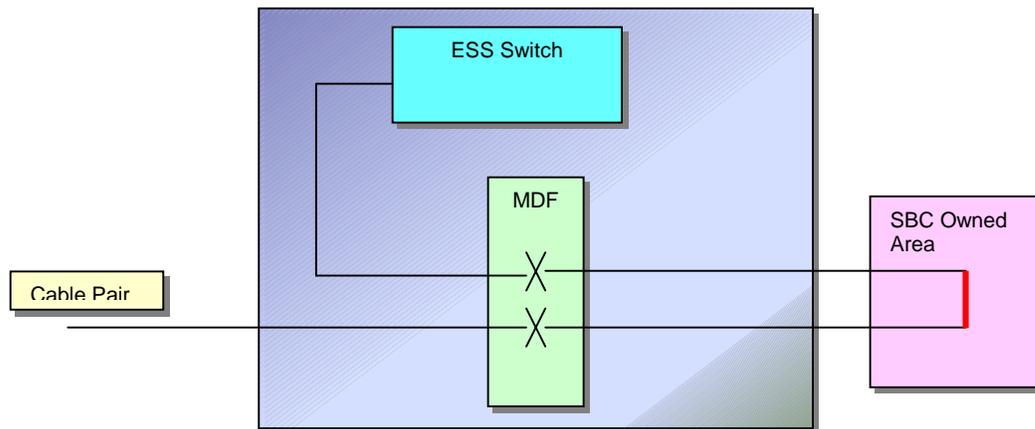

POTS Switch Port and Cable Pair connected using UNE Method 3 within SBC Owned Area outside of the Central Office. The CLEC connection is annotated in **RED**.

4. METHODS OF INTERCONNECTION

The CLEC will perform all cross-connects on this frame (the ILEC may perform this function as a vendor for, and paid by the CLEC but not as an extension of the regulated circuit). The CLEC will be required to use the proper cross-connect materials (twisted pair, coax, fiber jumpers) for the service at hand and use the proper tools.


CAUTION MUST BE EXERCISED when two transport signals are connected to each other. The CLEC will be the only group aware of the integration of two carrier signals and must perform a transmit-receive turnover at the SUT Bay/Frame to permit the proper function of what has become known as "back to back carrier". The turnover is not required with only one carrier interconnection.

Proprietary Information -- Confidential


Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

Bold is hardwired
Blue represents ILEC provided cable and panels


A. ILEC Handoff to CLEC with ILEC Provided POT

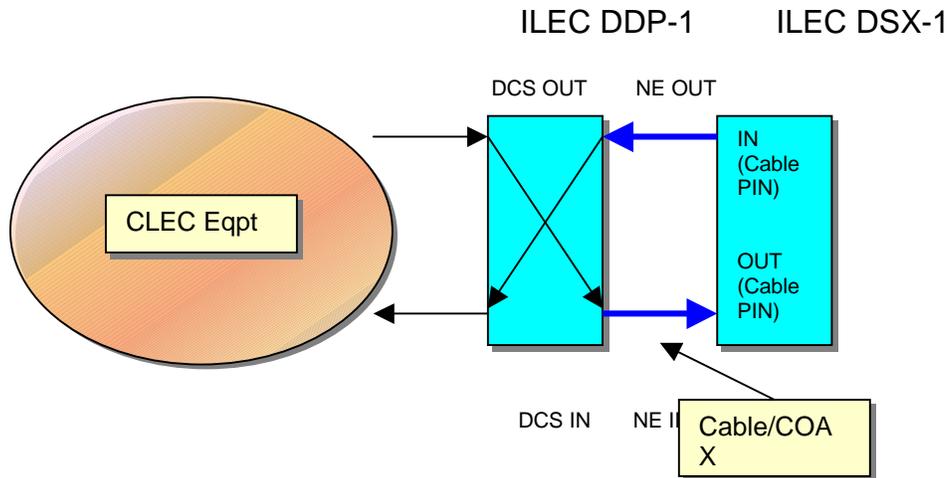

B. ILEC Handoff to CLEC using CLEC direct connect to ILEC, no POT.

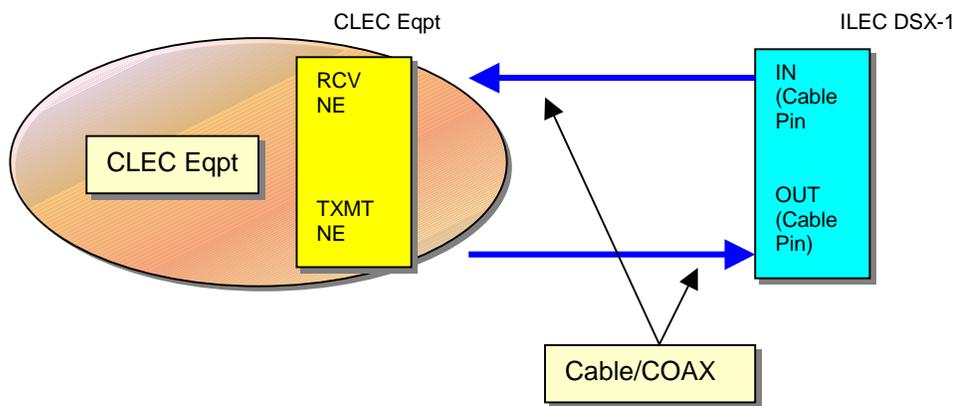


C. ILEC Handoff to CLEC with CLEC Provided POT using one DSX

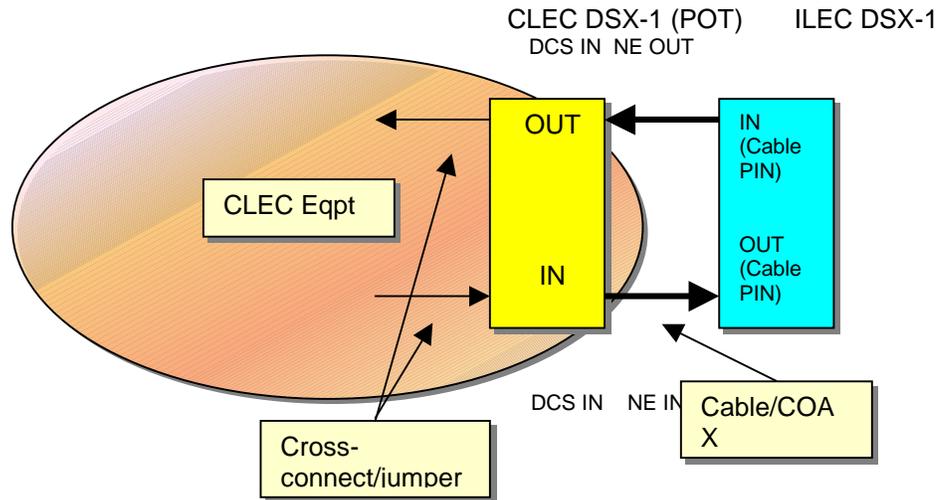

The CLEC needs to terminate their TMXT on the Cable PIN IN jack to the ILEC cable (to the ILEC OUT jack) and the Cable PIN OUT jack to the ILEC cable (to the ILEC IN jack). If the CLEC terminates in error to the cross-connect pins on their panel, they will have to change their cabling to match the ILEC or they will have to connect the services in a cross-connect manner (double cross) to compensate for the error. (The CLEC may be using a DDP with an internal reverse cross.)

D. ILEC Handoff to CLEC with CLEC POT using Two DSX panels

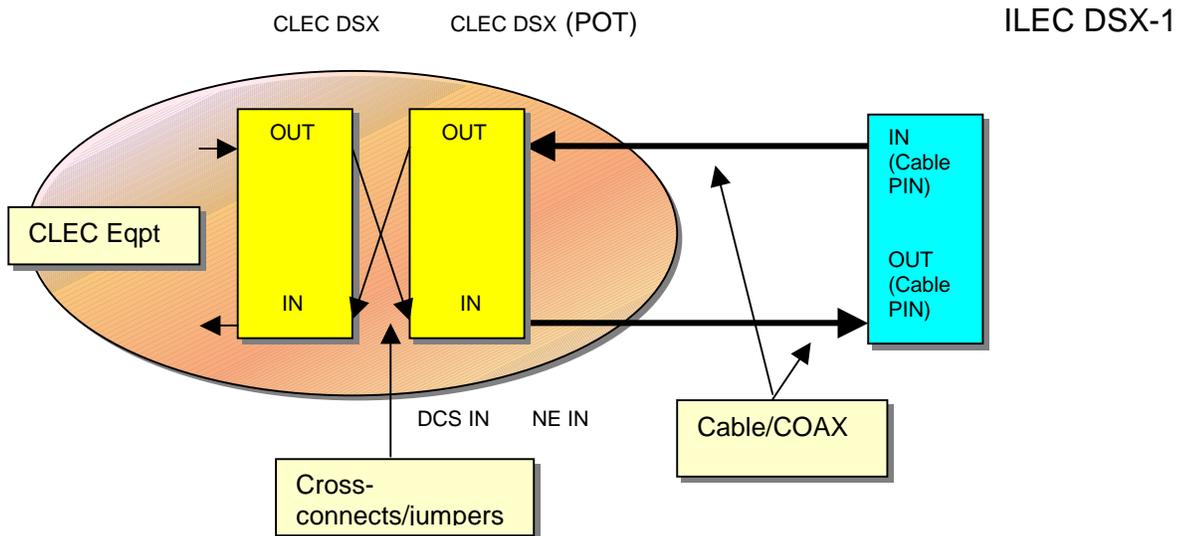

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

5. OPERATIONAL SUPPORT SYSTEMS

Connecting Facility Assignment

The goal on assignments is to follow the ATIS/OPF-ASR-005 Connecting Facility Assignment (CFA) effective September 25, 1999 on a going forward basis. It is intended for DS1, DS3 and Optical Carrier Facilities will be handled in this manner. DSO and xDSL/ADSL services are also intended to move toward this solution. Excerpts from the OBF as follows:

The CFA identifies the provider carrier systems and channel to be used from a Wideband Analog or a High Capacity Facility. The Facility Identification consists of the following elements:

1. The Facility Designation which uniquely identifies a particular facility type between two terminal locations (variable length, 1-5 characters).
2. The Facility Type which is usually identified through the use of a code set found in Telcordia Practice BR 795-450-100 (variable length, 1-6 characters).
3. The Channel/Pair number of the Wideband or Hi-Cap Facility that is being used to provide the service shown on the ASR. The Channel/Pair number may be accompanied by a modifier code to further define the facility characteristics (variable, 1-5 characters).
4. The "A" location, which is the location of the facility termination that has the lower alpha/numeric CLLI code (8 or 11 characters).
5. The "Z" location, which is the location of the facility termination that has the higher alpha/numeric CLLI code (8 or 11 characters).
6. Virgules (/) are used as delimiters to separate the different elements of the CFA.

NOTE 1: The range of assignments should be provided on the DLR during the provisioning of the Wideband or High Capacity Facility. The customer specifies the particular carrier system and channel or channels to be utilized.

NOTE 2: All element entries of the Connecting Facility Assignment are left justified with no trailing spaces.

NOTE 3: For those companies that do not combine unbundled network elements, the CFA may not be populated when ordering dedicated interoffice transport.

EXAMPLE:

101/T1/3/SNANTXCAHA2/SNANTXCACG0	Method 1
101/T1/3/SNANTXCAHA2/SNANTXCAHA4	Method 2
101/T1/3/SNANTXCAHA2/SNANTX08H92	Method 3

TIRKS

Trunks Integrated Record Keeping System (TIRKS) is the standard OSS for DS1, DS3 and Optical UNEs. The CFA will be used for the method of administration. Each Bay/Frame will be given a unique CFA for all terminations and CLEC assignments. Tie pair methodologies are still to be worked out.

SWITCH

Each of the SBC Local Exchange Carriers uses a different method for the processing of DSO/ADSL/xDSL UNEs. Generically, except for Line Sharing, Pacific Bell/Nevada Bell and SNET use SWITCH for these services while SWBT and Ameritech use TIRKS for this purpose. The use of CFA on a going forward basis is the recommended strategy, but the details remain unsolved. Discussion revolves around the development of a Universal CFA that could be used in either SWITCH or TIRKS, but without significant software program upgrades; the process would be a manual affair in the interim.

6. CENTRAL OFFICE PLANNING

UNE Method 1 and 3 will utilize existing equipment, bays and frames. In these arrangements, follow standard operating procedures and Frame Forecast Methods and Procedures and Space Planning Practices and M&Ps.

UNE Method 2 requires discussion. Frame Planners, Space Planners and Transport Equipment Engineers (TEE) need to consider the placement of the Shared UNI Termination (SUT) bay/frames using the following rules:

1. Place the bay/frames in close proximity to one another.
2. Place the SUT bay/frames in the existing Collocation Area where security measures are already provisioned.
3. Build out the overhead superstructure ironwork for a Building Bay area (approximately 400 square feet at the time of the first UNE Method 2 request for that Central Office.
4. The recommended deployment for UNE Method 2 would require that all four bay/frame types be installed at the same time with the first request. This would permit the TEE only having to provision the office once for UNEs with one Telephone Equipment Order. Changes to the CLEC requirements may dictate a rapid installation of another one of the four frames if only one is originally provisioned.
5. Place only one type of service per SUT bay/frame. DO NOT MIX DSX-1, DSX-3, FDF or single Sided Bay mounted conventional frame services in the same bay.
6. Cabling between adjacent frames of the same product type will be placed through bay troughs designed for that purpose, not overhead racking.
7. Ensure that the appropriate infrastructure Fiber Raceway & Switchboard racking has been installed from the SUT Collocation Area back to the ILEC standard bay/frames such as the Main IDF, DSX or FDF frames.
8. Ensure that appropriate power, lighting, grounding has been provided to the area.

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

9. Place the SUT Collocation Area in such a place as to minimize the distance from the Main DSX-3 to the SUT DSX-3 (the shortest distance service required). Every effort should be made to insure that DS3 and DS1 services will be installed in a similar manner that the ILEC would for their own services at a customers premises using the correct transmission characteristics for that service. Distance separations must be carefully analyzed to insure consistent applications for services. The location of this UNE Frame area is recommended to be within 50 linear feet of the Central Office ILEC DSX3 and be located adjacent to the ILEC Security Partition so that it may become an adjoining portion of that partition. In addition, the maximum distance for any SUT frame location discussed here must not exceed 100 feet from the primary DSX1 if DS1 services are provisioned via twisted pair and/or cable terminations. Refer to the *Collocation Provisioning Guidelines (CPG)* for further information.
10. The UNE Frame area must be reserved and forecasted as "Used Space" in the Collocation Area at such time that the Site Conditioning is performed in the Collocation Area.
11. All cable placed by either a CLEC or an ILEC must conform to the rules covered in the Technical Publication for Installation, TP 76300MP, Section 2, Cabling or AM-TR-11, Ameritech Installation Guide.
12. One of the concerns when engineering the cabling between the Interconnector equipment and ILEC's digital cross connect frame is cable distance and signal degradation. The following table provides the maximum cabling distance limitations for DS1 and DS3 circuits (without regeneration devices) using the ideal cable facilities for the Collocation SUT Area Bay/Frame and the equipment terminated in the ILEC area:


Type of Connection / Cable Used	Distance Limit (NE-DSX1/DSX3)	Distance Limit Cross-Connect at DSX1/DSX3	Maximum Overall Distance Limit (NE-NE)*
DS1 22 gauge wire	655 feet	120 feet	1,310 feet
DS1 24 gauge wire	450 feet	120 feet	900 feet
DS1 26 gauge	450 feet	120 feet	900 feet
DS3 734C coax	450 feet	45 feet	900 feet
DS3 735C coax	250 feet	45 feet	500 feet

*Notice that if a DS1/DS3 signal has portions of both types of cabling, the lower value will need to be used.

13. The Relay Racks (Bays) used for the SUTs will use a 2 ½"-inch spacer for permanent cabling space on the vertical sides of each bay.
14. Initial Deployments should be made in the following manner:

 Single Sided Bay/Frame – One Bay with 8 vertical 89-type blocks.
 DSX-1 – One Bay with two 84-port DSX-1 rear-rear panels.
 DSX-3 – One Bay with two 24-port DSX-3 rear-rear panels.
 FDF – One FDF bay with two 72-port FOT panels.


15. Panel Ordering Information:
 - DSX-1 to be used in all SBC Local Exchange Carriers is the DSX-1 84 port (1-84) RX, SSI: 300026838, ADC part code: D1M-1F0001.
 - DSX-3 to be used in all SBC Local Exchange Carriers is the DSX-3 24-port (1-24) RX,-Empty Chassis, SSI: 00396390, ADC part code: DSX4H-W3C.
 - DSX-3 Module (requires 24 per chassis) to be used in all SBC Local Exchange Carriers is the RX-Module, Mid-BNC/440, 6-port (MO, XO, OUT, IN, XI, MI), SSI: 300027182, ADC part code: DSX-4H-MBRC-BA.
 - The FOT (FDF) to be used in all SBC Local Exchange Carriers is the FOT 72-port FX, SC-UPC Connector, SSI: 300059666, ADC part code: SBFCMCM-670000-A.
16. DSX-1, DSX-3 and FDF standard relay rack configurations shall be used in accordance with existing SBC drawings.
17. Leave one bay space adjacent to each new bay/frame deployed for within 5-year growth. The lineup may have all four types of frames in the same line.
18. The overall distance from one Network Element to another Network Element (such as a DCS) is shown in the drawing below:

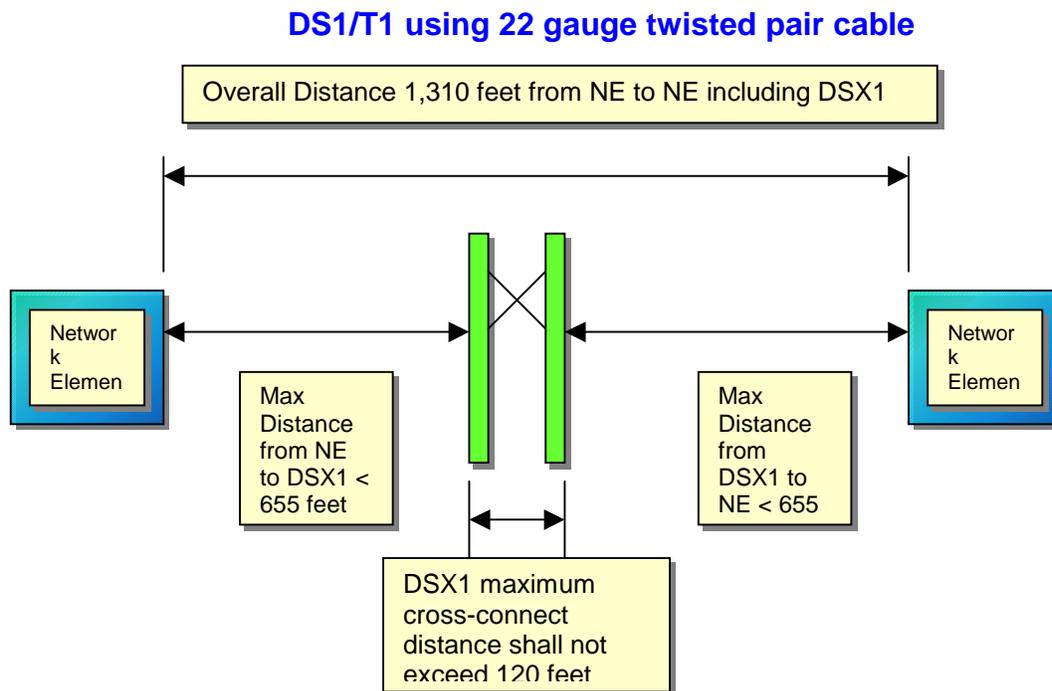


Proprietary Information -- Confidential


Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

DS1/T1 using 24/26 gauge twisted pair cable

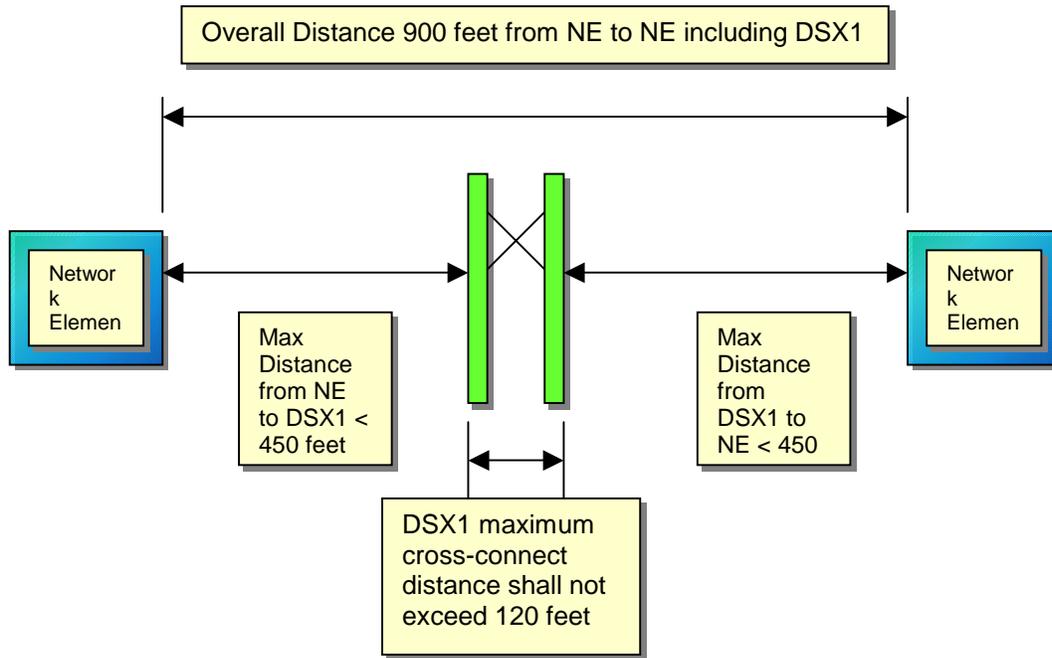

DS3 using 734C-type coax

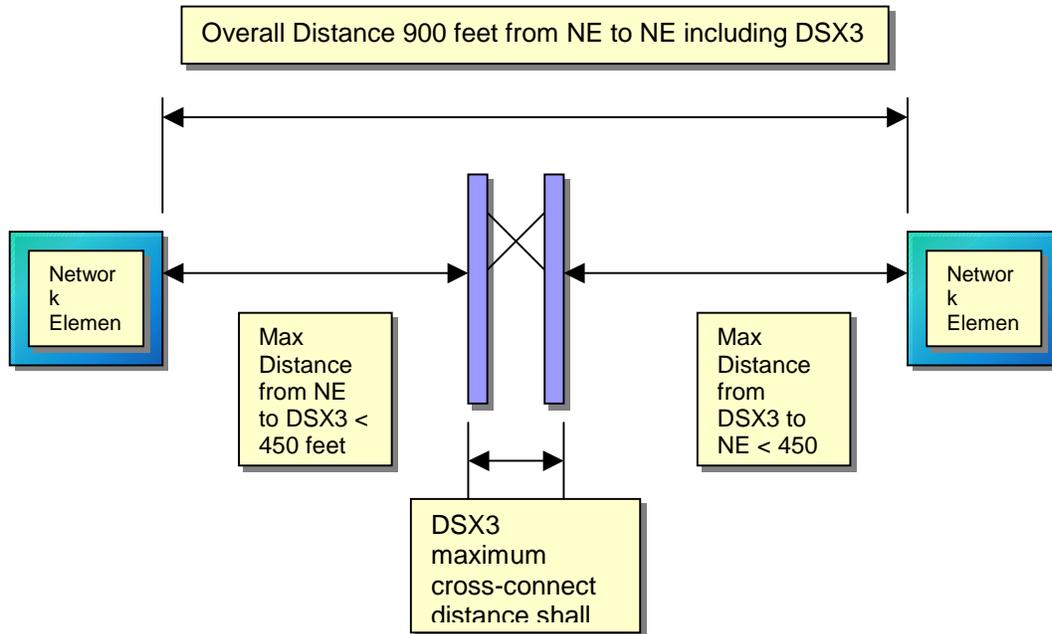

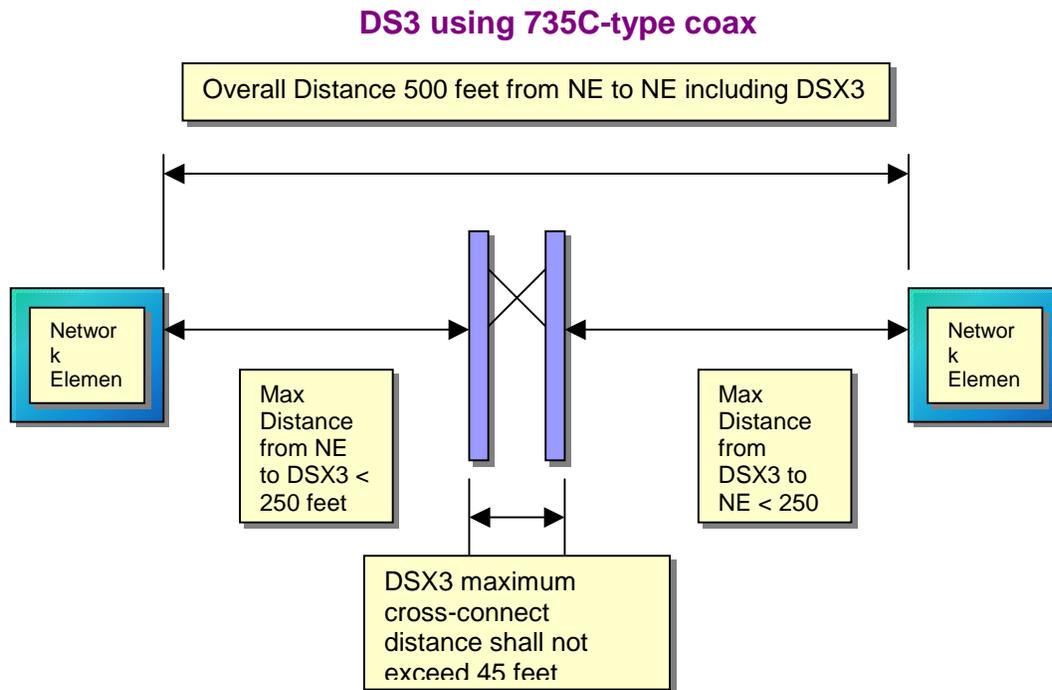

19. In cases where this distance limit cannot be met to the CLEC from ILEC equipment, intraoffice repeaters or terminations on Digital Cross-Connect Systems (DCS) may be needed to regenerate the signal to meet service parameters for the circuit.
20. The Transmit facility coming toward you is cabled to your "Out" Jack of your DSX panel.
21. The Cabling and Cross-Connects are placed on an OUT to IN, IN to OUT basis when the panel is wired straight inside in a standard DSX configuration.
22. If Interconnect Panels are used for Termination Panels they shall be treated as two DSX panels back-to-back. These have an internal cross inside and can result in a violation of the cross-connect rule by requiring a connection OUT-OUT and IN-IN.
23. Labeling on panels may be misleading. Use the OUT and IN principle.
24. The ILEC must not compensate for the lack of cross-connect (OUT-IN and vice versa) on the ILEC frame.
25. Equipment areas will be planned so that equipment staging and uncrating can be accomplished within the common collocation equipment area for as long as possible. To accomplish this, equipment growth shall be planned so that bay/frame and equipment lineups (installation) occur towards the equipment area's access point or doorway.
26. Place 50-amp fuse panels with each DSX-1 and DSX-3 bay/frame.
27. 1 3/4-inch spacing between shelves if 1 3/4 x 23 bay for PB/NB/ SWBT; 2-inch spacing between shelves if 2 x 23 bay for AIT/ SNET/SWBT.

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

28. The standard nomenclature of the DS0/xDSL/ADSL bay/frame is called the "Single Sided Generic Distributing Frame" or "**SSGDF**". This product may be ordered from Lucent/Avaya, Marconi or Corning and may reference this name. The materials will fit within a standard network bay from Custom Cabinets, Newton Instruments or Hendry Communications. The Ordering entity will be required to order connecting blocks primarily manufactured by either Corning part number 139-N0100R012B, Terminal Block, 100 Pair, 8x25 SWW, non-Conn, Beige, PID 300137205 for AIT, SWBT, PB, NB and PID 9508267 for SNET or the Lucent/Avaya 89F1F100.

7. FUNDING

Per agreement from Enterprise Technology Support and Finance on August 4, 2000, UNE Method 2 Interconnection, Collocation will serve as the source of funds for establishing the new frames/bays. At this time we will address requests on an as needed (as opposed to proactive) basis. Thus, we should only proceed with the valid orders provided to SBC Communications Inc by CLECs. The following CEC codes are to be used:

L SWT UNEFR COLCN (Switching)
L TRN UNEFR COLCN (Transport)

By using these codes we will be able to track collocation expenditures unique to UNE Method 2 Interconnection. The actual CEC code definitions are:

L is the SUM Code = Legal

SWT is the MAR Code = Switching

TRN is the MAR Code = Transport

UNEFR is the MOD Code = Capital Expenditures necessary to establish frames (Conventional, DS1, DS3, Fiber) associated with Unbundled Network Element (UNE) Method 2 Interconnection

COLCN is the Project Code = Collocation

Todd Minister has set up the codes in CPTS.

8. REFERENCES

For further information or electronic copies of this document and related information, visit the internal SBC Local Exchange Carrier Web site: <http://home.sbc.com/commonsystems/> or <http://apex.sbc.com>

Document	Description	Issue & Date
SBC-002-316-002	Collocation Provisioning Guidelines	Issue 11.1, Jan 2001
SBC-002-316-001	UNE Deployment in the Central Office	Issue 2, Dec 2000
SBC-002-316-004	Tie Pair Management on MDF/IDF Frames	Issue 1, Jan 2001
SBC-002-316-006	Line Sharing Deployment M&P	Issue 7.3, Dec 2000
SBC-002-316-007	Special Interconnection Arrangement (SIA-BFR)	Issue 4.1, Jan 2001
SBC-002-316-008	CLEC Cable Placement	Issue 3.1, Jan 2001
SBC-002-316-009	ADSL for the Central Office M&P	Issue 12.1, Jan 2001
SBC-002-316-003	Frame Forecast M&P	Issue 7, Jan 2001
SBC-002-316-010	CLEC Line Sharing (CLEC Version)	Issue 7.0, Nov 2000
SBC-002-316-011	SingleMode Fiberoptic Optical Splitters	Issue 2, Dec 2000
SBC-002-316-012	Line Splitting	Issue 1, Jan 2001 (Pending)
SBC-002-316-015	Decommissioning of CLEC Equipment/Wiring M&P	Issue 1, Jan 2001 (Pending)
Infrastructure Deployment Guidelines (IDG), Transport, Tab 13	Digital Cross-Connect Systems (DSX1, DSX-3)	Aug 2000
Infrastructure Deployment Guidelines (IDG), Transport, Tab 3	Fiber Distribution Frames	May 2000
Infrastructure Deployment Guidelines (IDG), Switch, Tab 11	Subscriber Main Distributing Frames	Aug 2000
TP 76200MP	Network Equipment – Building Systems	Issue 4, Apr 2000
TP 76300MP	Installation Guide within the Central Office	Issue 5, Jul 2000
TP 76400MP	Detail Engineer Requirements for the C.O.	Issue 5, Aug 2000
TP 76299MP	Unbundled Network Elements	Issue 1, 2000
SBC-002-316-101	Wire Center Planning M&P, Space Planning for the C.O.	Issue 7, Nov 2000
BSP 800-003-100MP	Standards for Network Equipment Eng & Space Planning	Issue A, Nov 1999
BSP 636-299-900MP	SBC – Fiber Distributing Frames	Issue A, Jan 2000
BSP 800-500-900MP	SBC – Digital Cross-Connect DSX-1 Standards	Draft for Rel 9/2000
BSP 800-500-901MP	SBC – Digital Cross-Connect DSX-3 Standards	Draft for Rel 9/2000
BSP 201-222-900MP	SBC – Conventional Frame Standards	Draft for Rel 9/2000
BSP 201-222-901MP	SBC – Modular Frame Standards	Draft for Rel 9/2000
BSP 790-100-652MP	SBC – Power Plant Planning	Issue A, 1999
BSP 790-100-654MP	SBC – DC Plants	Issue A, 1999
BSP 790-100-656MP	SBC – DC Distribution	Issue A, 1999
BSP 790-100-655MP	SBC - Batteries	Issue A, 1999
BSP 790-100-659MP	SBC – AC Plants	Issue A, 1999
BSP 800-000-100MP	SBC – Common Systems – Hardware Products	Issue A, 1998
BSP 800-000-101MP	SBC – Network Equipment Anchoring Requirements	Issue A, 1998
BSP 800-000-102MP	SBC – Central Office Equip. Framework Design Req.	Issue A, 1998
BSP 800-000-104MP	SBC – Bracing Requirements for Equip. on Raised Floor	Issue A, 1998
BSP 800-000-150MP	SBC – CO Cable & Wire Inst Req. Racks and Raceways	Issue A, 1998
BSP 800-003-100MP	SBC – Space Planning Stds for Network Equip. Environ.	Issue A, 1998
BSP 800-006-150MP	SBC – Common Systems Net. Fac. Aux Frame & Bracing	Issue A, 1998
BSP 800-006-151MP	SBC – Network Facility Cable Rack Requirements	Issue A, 1998
BSP 800-006-152MP	SBC – Floor Stanchion Supported Cable Rack Req.	Issue A, 1998
BSP 800-068-150MP	SBC – Central Office Equip. Framework Support Req.	Issue A, 1998
BSP 802-001-180MP	SBC – Grounding and Bonding Requirements	Issue A, 1998
Building Block 0740	Line Sharing Equipment	Issue 1, Aug 2000
PBSD ID-1891	SBC Interconnection Drawings for SWBT/PB/NB	Issue 9, Nov 2000

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

PBSD ED-1891	SBC Engineer Drawings for SWBT/PB/NB	Issue 11, Jun 2000
AM-E-01578-10	SBC Design Equipment Drawings for Ameritech	Issue 10, Nov 2000
AM-W-01578-11	SBC Design Wiring Drawings for Ameritech	Issue 11, Nov 2000
SNE J95215-71	SBC Line Sharing Equipment for SNET	Issue 8, Nov 2000
SNE T95215-31	SBC Line Sharing Wiring for SNET	Issue 6, Nov 2000
SNE J99121-71	SBC Physical Collocation Equipment for SNET	Issue 21, Nov 2000
SNE T99121-31	SBC Physical Collocation Wiring for SNET	Issue 14, Nov 2000
SNE J95215-71	SBC Engineer Drawings for SNET	Issue 2, Jun 2000
PBSD-ED-1175	SBC Equipment Drawing DSX-1 for PB/SWBT	Issue 4
PBSD-ID-1175	SBC Interconnect Drawing DSX-1 for PB/SWBT	Issue 4
SNE J95197-71	SBC Equipment Drawing DSX-1 for SNET	Issue 4
SNE T95197-31	SBC Interconnect Drawing DSX-1 for SNET	Issue 2
SNE SD95197-01	SBC Schematic Drawing DSX-1 for SNET	Issue 1
AM-E-01436-10	SBC Equipment Drawing DSX-1 for AIT	Issue 8
AM-W-01436-11	SBC Interconnect Drawing DSX-1 for AIT	Issue 10
PBSD-ED-1115	SBC Equipment Drawing DSX-3 for PB	Issue 4
PBSD-ID-1115	SBC Interconnect Drawing DSX-3 for PB	Issue 9
PBSD-ED-1117	SBC Equipment Drawing DSX-3 for SWBT	Issue 1
PBSD-ID-1117	SBC Interconnect Drawing DSX-3 for SWBT	Issue 1
SNE J95213-71	SBC Equipment Drawing DSX-3 for SNET	Issue 1
SNE T95213-31	SBC Interconnect Drawing DSX-3 for SNET	Issue 1
AM-E-01447-10	SBC Equipment Drawing DSX-3 for AIT	Issue 10
AM-W-01447-11	SBC Interconnect Drawing DSX-3 for AIT	Issue 11
PBSD-ED-1140	SBC Equipment Drawing FDF for PB/SWBT	Issue 2
PBSD-ID-1140	SBC Interconnect Drawing FDF for PB/SWBT	Issue 1
SNE J95145-71	SBC Equipment Drawing FDF 12" for SNET	Issue 13
SNE T95145-31	SBC Interconnect Drawing FDF 12" for SNET	Issue 6
SNE J95218-71	SBC Equipment Drawing FDF 15" for SNET	Issue 3
SNE T95218-31	SBC Interconnect Drawing FDF 15" for SNET	Issue 1
AM-E-01582-10	SBC Interconnect Drawing FDF for AIT	Issue 1
SBC-C-10001-E-00 SBC-C-10001-W-00	128-port High Density Line Sharing POTS-SPLITTER	Issue 1, 2 nd Qtr, 2000
SBC-C-10002-E-00 SBC-C-10002-W-00	96-port standard Line Sharing POTS-SPLITTER	Issue 1, 2 nd Qtr, 2000
PAN 20001017	96-port POTS-SPLITTER Approval for Use	May 2000
PAN 2000737	128-port POTS-SPLITTER Approval for Use	Aug 2000
PAN 20001000	Main Distributing Frames Approval for Use	Jan 2000
PAN 19995316	Connector Blocks Approval for Use	Jan 2000
PAN 19985029	Covers for Unit Protector and Cross-Connect fields for ADSL/xDSL Approval for Use	1999
PAN 19985018	Tight Twist Wire for 1.544 Mb/s/T1 Approval for Use	1998
PAN 19985037	Cover for Unit Protectors & Cross-Connect Fields for T1/1.544 Mb/s Approval for Use	1998
PAN 19985036	Cover for Unit Protector & Cross-Connect Fields for High Voltage Approval for Use	1998
MMP 98-06-001	Broadband Twisted Pair Wiring for Distribution and Protector Frames	Issue 2, Jan 2000
SIP 10-4500-025	Line Sharing-Non-Digital Loop Electronics ADSL for Network Services and LFO Operations	Issue 3, Jul 2000
SBC-C-20000-E-00 SBC-C-20000-W-00	SBC Drawings, Engineering & Wiring for MDF Frames	Issue 1, Issue 1, 2 nd Qtr, 2000
SBC-C-20001-E-00 SBC-C-20001-W-00	SBC Drawings, Engineering & Wiring for a Single Sided Bay Frame	Issue 1, Issue 1, 2 nd Qtr, 2000
SBC-C-20002-E-00 SBC-C-20002-W-00	SBC Drawings, Engineering & Wiring for a DSX-1 Bay	Issue 1, Issue 1, 2 nd Qtr, 2000
SBC-C-20003-E-00 SBC-C-20003-W-00	SBC Drawings, Engineering & Wiring for a DSX-3 Bay	Issue 1, Issue 1, 2 nd Qtr, 2000
SBC-C-20004-E-00 SBC-C-20004-W-00	SBC Drawings, Engineering & Wiring for a Fiber Distribution Frame Bay	Issue 1, Issue 1, 2 nd Qtr, 2000
Building Block 0740	SBC Building Block for Main Distributing Frames	Issue 1, Dec 2000
SBC-FLASH 00-030R2	SBC Equipment Deviation for oversized Equipment	Issue 2, Nov 2000
SBC-FLASH-000-000-035	SBC IDF Installation Standard	Issue 1, Jan 2001

9. CONTACT NAMES

SBC Corporation Contacts

Steve Weinert, Area Manager-Enterprise Technology Support (Common Systems Standards)
(214) 858-1355, E-Mail: sw0872@txmail.sbc.com or batman.gothamcity@sbc.com

Sha Hoda, Area Manager-Enterprise Technology Support (Common Systems Standards)
(626) 308-8618, E-Mail: sxhoda@msg.pacbell.com

Mark Powers, Area Manager-Enterprise Technology Support (Common Systems Standards)
(858) 886-3050, E-Mail: mepower@msg.pacbell.com

Mike Yeilding, Area Manager-Enterprise Technology Support (SBC Drawings)
(925) 823-4747, E-Mail: myeild@msg.pacbell.com

Mike Mores, Area Manager-Enterprise Technical Support (TEE Support)
(815) 727-0500, E-Mail: michael.mores@ameritech.com

Mike Kirksey, Area Manager-Federal Regulatory
(214) 858-1334, E-Mail: mk5502@txmail.sbc.com

Ed Granger, Area Manager-Enterprise Technology Support (SNET-Common Systems)
(203) 553-8180, E-Mail: eg1724@ctmail.snet.com

Tom Steyer, Associate Director-Procurement Contracting
(925) 824-8748, E-Mail: tpsteye@msg.pacbell.com

Major Manufacturer Contacts

ADC Telecommunications: Chuck Worley-SBC Lead Account Manager
(314) 514-1151, E-Mail: chuck.worley@adc.com

ADC Telecommunications: Sandy Gogue-SBC Lead Detail Engineer
(314) 514-1150, E-Mail: sandy.gogue@adc.com

Corning: Clint Blundon, Regional Account Manager
(636) 978-2889, E-Mail: clint.blundon@corning.com

Corning: Rich Morris, SBC Lead Systems Engineer-Copper Products
(817) 431-7667, E-Mail: richard.morris@corning.com

Avaya Communications (ex-Lucent): Art Lafser, Senior Consultant – Product Marketing & Management
(636) 891-5110, E-Mail: lafser@avaya.com

Lucent Technologies: Maureen Bee, SBC Account Manager-Network Product Group
(210)530-2564, E-Mail: mbee@lucent.com

Marconi: Kevin Craddock, National Account Manager
(972) 501-3316, E-Mail: kevin.craddock@marconi.com

Marconi: Albert McGovern, SBC Director of Engineering
(630) 579-5184, E-Mail: albert.mcgovern@marconi.com

10. COPYRIGHT PAGE

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

Notice: This document is an unpublished work protected by the United States copyright laws and is proprietary to SBC. Disclosure, copying, reproduction, merger, translation, modification, enhancement, or use by anyone other than authorized employees or licensees of SBC without the prior written consent of SBC is prohibited.

Copyright © 2000 SBC

All rights reserved.

Trademarks: Windows 95, Windows NT, Excel, Word for Windows, Internet Explorer, Office Professional 97, and Microsoft are trademarks of the Microsoft Corporation. Netscape Navigator is a trademark of Netscape Corporation.

Publisher: Network Planning & Engineering – Common Systems District
SBC Services Inc.
3 Bell Plaza, Rm 1610.A4
Dallas, Texas 75202

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.

Proprietary Information -- Confidential

Not for Disclosure Outside of SBC Local Exchange Carriers or SBC Services Inc. without SBC's written consent.