

700-, 701-, AND 702-TYPE CONNECTORS
AND
E, F, AND H CONNECTOR PRESSERS


1. GENERAL

1.001 This addendum supplements Section 081-852-130, Issue 4. Place this sheet ahead of Page 1 of this section.


1.002 This addendum is issued to revise Fig. 7.

2. CHANGES TO SECTION

2.001 On Page 8, change Fig. 7 as follows:



1. USE SHANK OF 17/64 DRILL AS A GAUGE.
2. GRASP DRILL SHANK WITH E PRESSER AS SHOWN.
3. IF DRILL IS NOT FIRMLY GRASPED, THE PRESSER IS DEFECTIVE AND MUST NOT BE USED.

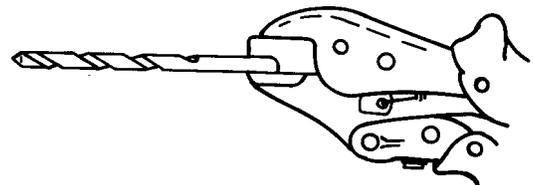

NOTE:
TRY DRILL BOTH WAYS TO FIND WIDEST SEPARATION.

Fig. 7—Checking E Connector Presser for Proper Press

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement