

Engineer:
Chris Samios

Date:
3/11/04

Drawn:
Bruce Page

Date:
3/11/04

Approved:
Jack Curtis

Date:
3/11/04

Issued/
Revised

Date:
3/11/04

Raytheon

JPS Communications

5800 Departure Drive, Raleigh, NC 27616

Title:
ACU RADIO APPLICATION NOTES

Size: Dwg. #: Rev: Sheet:
A 5961-271155-APP A 1 Of 1

APPLIES TO:

Bendix/King EPH Portable
Bendix/King GPH Portable
Bendix/King LPH Portable

RADIO MODIFICATIONS:

None required.

RADIO PROGRAMMING:

Not required

RADIO CONTROLS:

1. Adjust the Volume Control until the yellow "SIGNAL" indicator on the associated DSP Module flashes with receive audio. Should be about in the mid-range (12 o'clock) position.

CABLING:

Standard ACU-1000 and ACU-T Interface cables are made up of a 2 foot TRP Radio Tray Interface cable and the appropriate 13-foot Extension cable.

ACU-1000 Interface Cable	JPS P/N 5961-291155	(5961-271155 + 5961-261002-00)
ACU-T Cable	JPS P/N 5961-281155	(5961-271155 + 5961-281013-00)
TRP-1000 Shelf Interface Cable	JPS P/N 5961-271155	
RF Connector Type		

DSP PROGRAMMING:


RX Level	3*	0dBm*
TX Level	6*	0dBm*
Squelch Type	VOX*	
COR Polarity	Active Low*	
High Frequency Equalizer	4*	Flat*
RX Audio Delay	2*	100 ms*
TX Audio Delay (Radio Type)	0*	No Delay*
Noise Reduction Value	0*	Off*
VOX/VMR Threshold	1*	Med1*
VOX/VMR Hang Time	3*	775 ms*
COR Inhibit After PTT	1*	100 ms*
All Others	As needed	

(* Indicates Default Value)

NOTES:

PURCHASED PART

Rev	ECO	Date
A		

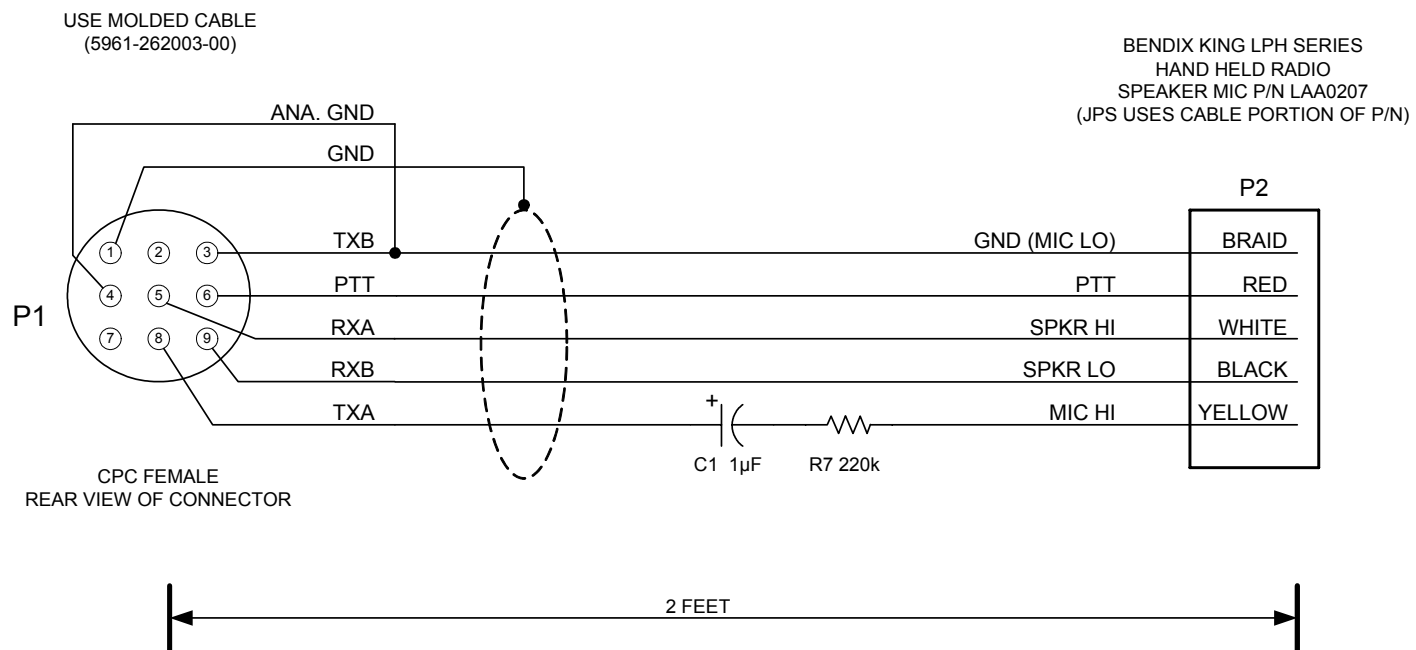

COMPONENT PCB
(JPS P/N 5961-271000)

C1 JPS P/N 0320-010500
R7 JPS P/N 1820-224000
JU4
JU5


NOTES: SHIELD DRAIN CONNECTED TO PIN 1 OF P1 ONLY.

USED WITH:
BENDIX/KING EPH PORTABLE
BENDIX/KING GPH PORTABLE
BENDIX/KING LPH PORTABLE

Designed By:	CTS	Raytheon JPS Communications Raleigh, NC USA		
Drawn By:	EDV	Title CABLE, CPC TO BK RADIO LPH/GPH/EPH		
Checked By:	JAC	Size A	Document Number 5961-271155	Rev A
		Issued Date	NOVEMBER 14, 2003	Sheet <u>1</u> of <u>1</u>

PURCHASED PART

Rev	ECO	Date
A		

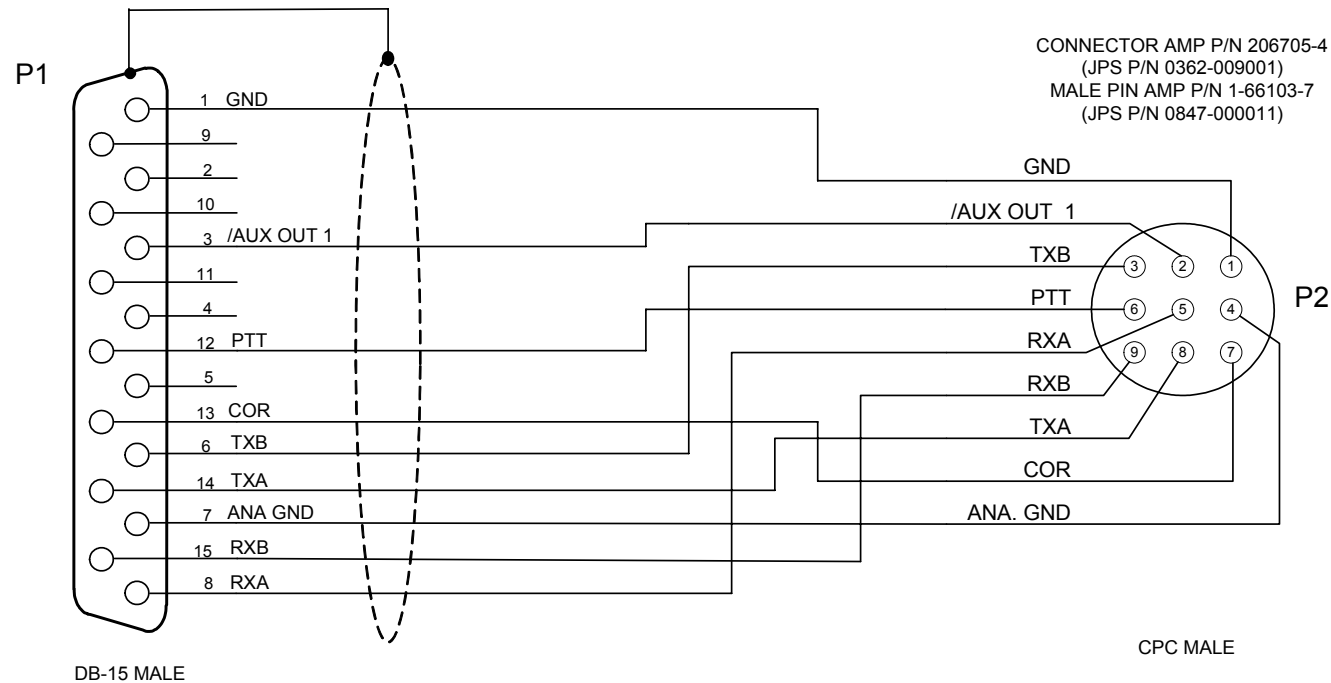

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.
2) CONNECT SHIELD DRAIN TO SHELL OF P1 ONLY.
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).


Designed By: JAC	Raytheon JPS Communications		
Drawn By: JAC	Title CABLE, ACU-1000 RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number 5961-261002-00	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	

Rev	ECO	Date
A		

PURCHASED PART

CONNECTOR AMP P/N 206708-1
(JPS P/N 0362-005003)
FEMALE PIN AMP P/N 1-66105-8
(JPS P/N 0362-005002)

CONNECTOR AMP P/N 206705-4
(JPS P/N 0362-009001)
MALE PIN AMP P/N 1-66103-7
(JPS P/N 0847-000011)

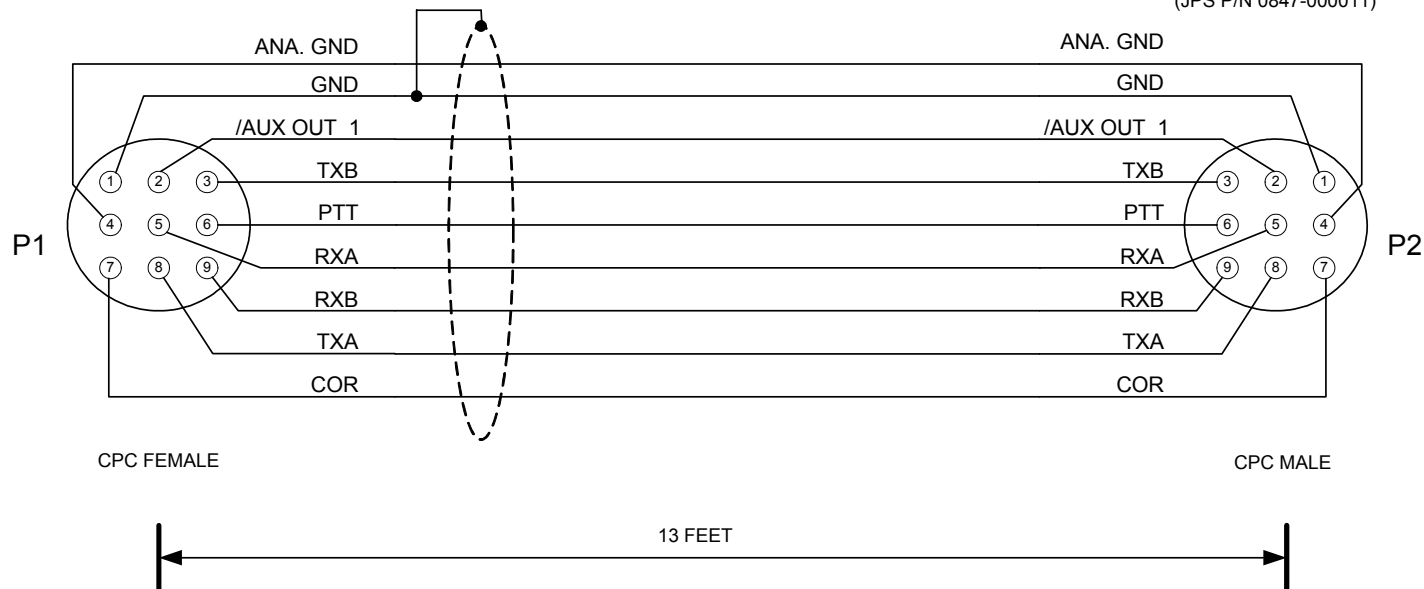

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.
2) CONNECT SHIELD DRAIN TO PIN 1 OF P1 ONLY.
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).

Designed By: JAC	Raytheon JPS Communications Raleigh, NC USA		
Drawn By: JAC	Title CABLE, ACU-T RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number 5961-281013-00	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	