

## TEST SETS DESCRIPTION TOOLS

### 1. GENERAL

- 1.01 This section describes noncoded test sets.
- 1.02 Revision arrows are used to emphasize significant changes. The reasons for reissue are listed below.

- (a) To rate the 133A and 139A test sets Mfr Disc.
- (b) To update the section to standard format.


- 1.03 The following list of test sets have been rated Mfr Disc. with their replacements.

CODE	REPLACEMENT
66A	139B
67A	67C
67B	67C
81A	139B
133A	
139A	139B

### 2. DESCRIPTION

- 2.01 **67C:** The 67C test set (Fig. 1) consists of a 509 receiver, a 15G headband, 360A and 360B

tools, and a 518C (test pick) tool assembled together with a W2CJ cord. ♦The 518C tool is equipped with a clip switch which, when depressed, shunts the 51,000 ohm resistor in the 518C tool out of the circuit. ♦ The 67C test set is used on distributing frame cross-connections.

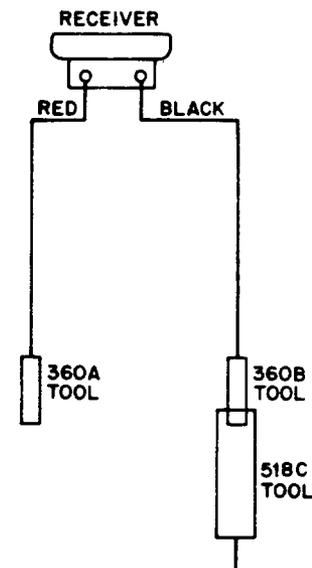

♦Fig. 1—67C Test Set♦

- 2.02 **82A:** The 82A test set (Fig. 2) consists of a 6017E key, M4S cord, W2DJ cord and ♦40 ohm and 200 ohm♦ resistors in a metal case. The 82A test set is used with transmission measuring sets for transmission tests of operator telephone circuits. The 82A test set replaces the 220 plug.

### NOTICE

Not for use or disclosure outside the  
Bell System except under written agreement

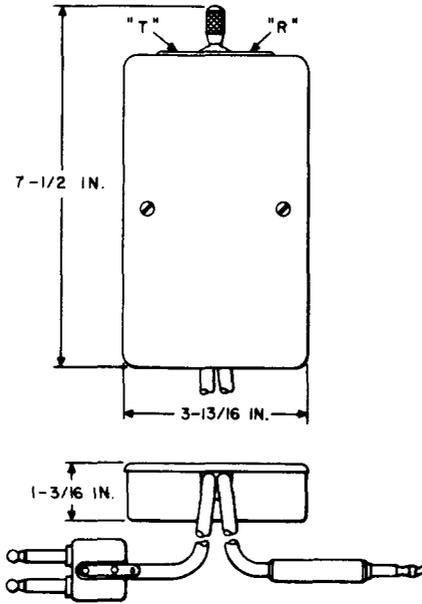


Fig. 2—82A Test Set