

**CABLE PRESSURE MONITORING SYSTEM (CPMS)
REMOTE TERMINAL SD-7C000-01
CROSS-CONNECTIONS**

CONTENTS	PAGE
1. GENERAL	1
2. CROSS-CONNECT REQUIREMENTS	1
A. Cross-Connect Rules	1
B. Status Indicator Connections	2
C. Airflow Connections	2
D. Transducer Connections	2
E. Satellite Terminal Connections	2
3. BASIC TRANSDUCER CROSS-CONNECTIONS	2
A. Assigned Cable Pairs	2
B. Spare Cable Pairs	2
4. CENTRAL OFFICE CONFIGURATIONS	3
5. DEDICATED ALARM CONNECTIONS	3
6. REFERENCES	3

1. GENERAL

- 1.01 This section covers information regarding the cross-connections necessary to provide a monitoring network for a remote terminal.
- 1.02 This section is reissued to provide for the connection of the line access relay panel (LARP) to spare cable pairs.
- 1.03 Due to the varied configurations involved, the operating personnel must be familiar

with the practice of cross-connection. Should there be any doubt concerning cross-connection practices, consult the specific section in the 069-XXX-YYY and 201-XXX-YYY Divisions.

2. CROSS-CONNECT REQUIREMENTS

A. Cross-Connect Rules

2.01 There are four rules to be followed in making connections from the CPMS remote terminal to the appropriate sensor. They are as follows:

- (1) Connections to sensors are made at a location within the wire center where the sensor is accessed most conveniently. Usually the most convenient access point is at the main frame.
- (2) All cross-connections to sensors are made at a terminal strip location separate from the remote terminal in order to eliminate all cross-connect activity on the line access relay panel (LARP) LR terminal strip and the logic and measurement panel (LAMP) LS terminal strip.
- (3) Designations which identify the LARP and the line access relay number will be carried through on all intermediate connection points (or terminal strips).
- (4) Marking of the cross-connect points should be sufficient to insure that the sensors are not disconnected from the remote terminal by routine telephone company activity on the main distributing frame (MDF). Use special service markers to indicate those lines which have transducers attached.

NOTICE

Not for use or disclosure outside the Bell System except under written agreement

Note: When running or handling jumpers, be careful not to kink or knot the wire or break the insulation.

B. Status Indicator Connections

2.02 Status indicators are connected from the distributing frame intermediate terminal strip to the terminal strip which contains the dedicated pairs; this strip is found on the MDF (Fig. 1). These interconnections are located on the terminal strips designated LS and marked on the main frame for identification as shown in Fig. 5 and 7.

C. Airflow Connections

2.03 Airflow sensor connections are made to a distributing frame intermediate terminal strip and then to the B transducer terminal strip located near or in the cable vault (Fig. 1). However, depending upon the wire-center main frame arrangement, it may be more convenient to make the connections directly to the terminal strip in or near the cable vault. **AIRFLOW** will be marked on the main frame as shown in Fig. 5.

2.04 All cabling to the intermediate terminal strip is installed by Western Electric Company with direction from the equipment engineer of the associated telephone company. During this installation, proper identification of cabling is necessary in order to associate the cross-connect terminals with the proper LARP.

D. Transducer Connections

2.05 Transducers assigned to subscriber lines are jumpered to avoid interference with subscriber service. A loop pattern is used to connect the customer to the line equipment through the remote terminal. Figure 2 shows two subscribers connected to the line equipment using this method.

2.06 Transducers assigned to spare cable pairs are jumpered to allow for line capacitance discharge in the idle state. A loop pattern is used to connect the cable pair to ground through the remote terminal. Figure 2 shows two spare cable pairs connected to ground using this method.

E. Satellite Terminal Connections

2.07 The dedicated trunk pairs to be connected between the remote terminal and satellite

terminals are derived from the 40 leads (20 pairs) associated with SIA2. These cross-connections are different from transducer cross-connections; therefore, special care must be taken in making these cross-connections to the trunk pairs.

2.08 The trunk pairs will be connected from the cable location on the VMDF to the cross-connect field in the SIA location of the auxiliary terminal strip on the HMDF (Fig. 3). The SIA2 terminal assignments for each pair are given in Table A.

3. BASIC TRANSDUCER CROSS-CONNECTIONS

A. Assigned Cable Pairs

3.01 There are variations in main frame connections. Figure 2 illustrates a typical arrangement whereby the remote terminal will be connected into the telephone circuit. The principle goal is to connect the remote terminal to the sensor on a customer line without disturbing service. This can be accomplished by the following steps:

- (1) Run jumper from designated terminals on the distributing frame intermediate terminal strip to the subscriber exchange cable pair located on the vertical MDF.
- (2) Run another jumper from designated terminals on the distributing frame intermediate terminal strip to the line equipment pair assigned to the subscriber located on the horizontal MDF.
- (3) Remove jumper (if present) between the line equipment pair on the horizontal MDF and the exchange cable pair located on the vertical MDF.
- (4) The connection at the exchange cable pair on the vertical MDF must be marked to prevent disconnection by routine telephone company activity.
- (5) Request central terminal operator to verify installation of jumper.
- (6) In cases where a subscriber is denied service, do **not** remove heat coils from the pair.

B. Spare Cable Pairs

3.02 There are variations in main frame connections. Figure 2 illustrates a typical arrangement

whereby the remote terminal will be connected to a spare cable pair. The main goal is to connect the remote terminal so that the pair is grounded at the central office when the line access relay is idle. This is accomplished by the following steps:

- (1) Run the jumper from the designated terminals on the distributing frame intermediate terminal strip to the cable pair located on the vertical MDF.
- (2) Run a jumper from the line equipment terminals on the distributing frame intermediate terminal strip to a ground. (Both sides of the jumper should be connected to ground.)
- (3) The connection at the exchange cable pair or the vertical MDF must be marked to prevent disconnection by routine telephone company activity.
- (4) Request central terminal operator to verify installation of jumper.

4. CENTRAL OFFICE CONFIGURATIONS

4.01 The overview of how the remote terminal is connected is shown in Fig. 4. As previously stated, the main purpose is to connect the remote terminal into the monitoring circuits without impairing customer service or going through the switching equipment. Figure 5 shows in detail how the cabling and cross-connections should be run on the conventional MDF in order to complete a connection.

4.02 The connection shown for assigned cable pairs in Fig. 5 uses LARP-01, relay 30 which furnishes connection facilities for two sensors (A and B) located on separate customer lines. If this is a new subscriber installation, run the jumpers as shown, with A leads for customer A and B leads for customer B. When a customer is already connected, the frame technician must run jumpers A and C and then remove B as shown in Fig. 6.

4.03 The connection shown for unassigned cable pairs in Fig. 5 uses LARP-01, relay 31 which furnishes connection facilities for two sensors (A and B) located on separate cable pairs. Run the jumpers as shown in Fig. 5, with A leads for sensor A and B leads for sensor B.

4.04 The modular MDF, due to its compactness, should present a neater and more simplified

jumper path as illustrated in Fig. 7. To minimize the length of jumpers, the terminal field on the modular frames is limited to the 8 by 16 configuration.

4.05 There may be combinations of the two main frames that have been illustrated, but whatever the configuration, the principle is the same. The remote terminal will be hard wired to the intermediate terminal strip on the distributing frames. From there the telephone company runs jumpers from the terminal strip to the designated line equipment pair or ground, from the terminal strip to the designated exchange cable pair and **then removes the jumper from subscribers exchange pair to the line equipment pair (if present)**. In the case of sensors which are not connected to LARP, the jumper will run from the intermediate terminal strip on the distributing frame to a terminal strip for the tie cable to the air dryers and pipe panels which may be located in or near the cable vault. If the sensors are on dedicated lines, the jumper will be from the intermediate terminal strip to the dedicated pairs on the MDF.

5. DEDICATED ALARM CONNECTIONS

5.01 An option is provided for the operating company to monitor, on a continuous basis, up to 16 of the 159 status indicator pairs by connecting these selected pairs to the dedicated alarm (DAL) circuit through diodes on the LS terminal strip. These connections are made by the telephone company.

5.02 The procedure consists of running a strap from the ring terminal of a status pair to the ring terminal of one of the 16 diodes as shown in Fig. 8. This strap should be run on the front of the LS terminal strip. Note that the LS terminal strips in each row are numbered from 0 to 7 top to bottom, and the rows are numbered 01 to the 100 left to right.

6. REFERENCES

6.01 The following listing provides information and/or test requirements for the CPMS remote and satellite terminals:

SD NO.	TITLE
SD-7C000-01	Plant Service System—Common-cable Pressure Monitoring System (CPMS) Remote Terminal

SECTION 201-612-302

SD-2P001-01	Common Systems—Cable Pressure Monitoring System Remote Terminal Test Set	201-612-302	Cable Pressure Monitoring System (CPMS) Remote Terminal SD-7C000-01 Cross-Connections
SD-7C001-01	Plant Service System—Cable Pressure Monitoring System Digital Data Processor (Central Terminal)	201-612-311	Cable Pressure Monitoring System (CPMS) Satellite Terminal SD-2P035-01 Trouble Locating Procedures
SD-2P035-01	Plant Service System—Cable Pressure Monitoring System Satellite Data Acquisition Terminal	201-612-312	Cable Pressure Monitoring System (CPMS) Satellite Terminal SD-2P035-01 Cross Connections
SECTION	TITLE	637-600-400	Cable Pressure Monitoring System (CPMS) System Maintenance
201-612-301	Cable Pressure Monitoring System (CPMS) Remote Terminal SD-7C000-01 Trouble Locating and Alignment Procedures	824-102-121	Performance Requirements for Cable Pressure Monitoring System (CPMS) Satellite Data Acquisition Terminal

TABLE A

**SATELLITE TERMINAL DEDICATED
TRUNK PAIR ASSIGNMENTS**

REMOTE TERMINAL ACCESS IDENTIFICATION FOR SATELLITE TERMINAL	SIA2 TERMINAL NUMBER	
	TIP SIDE OF DEDICATED PAIR	RING SIDE OF DEDICATED PAIR
40	11-1	16-1
41	12-1	17-1
42	13-1	18-1
43	14-1	19-1
44	15-1	20-1
50	11-3	16-3
51	12-3	17-3
52	13-3	18-3
53	14-3	19-3
54	15-3	20-3
60	11-5	16-5
61	12-5	17-5
62	13-5	18-5
63	14-5	19-5
64	15-5	20-5
70	11-7	16-7
71	12-7	17-7
72	13-7	18-7
73	14-7	19-7
74	15-7	20-7

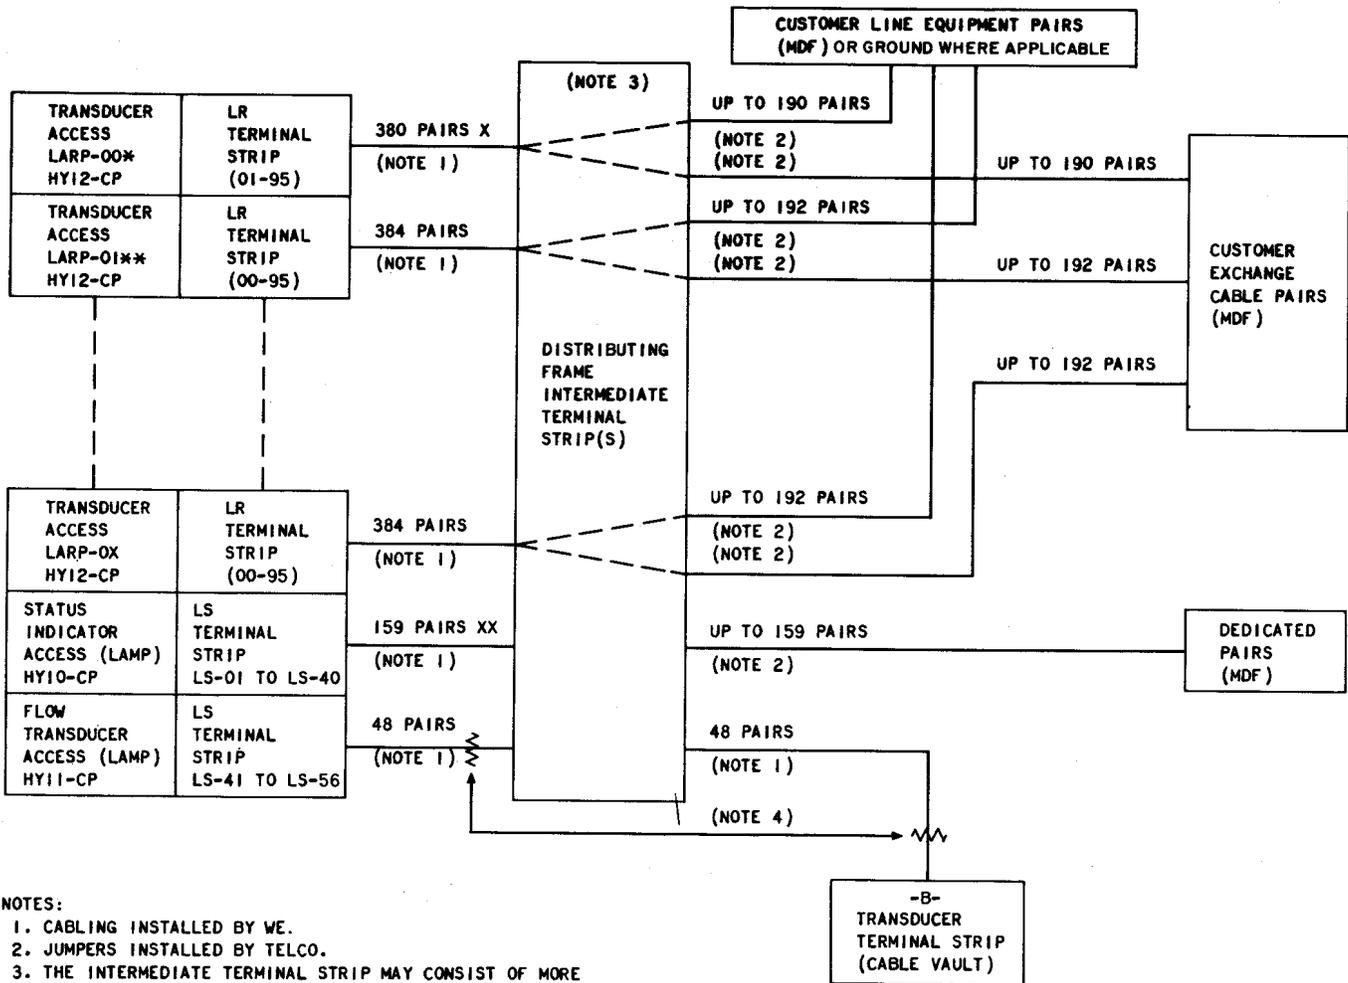


Fig. 1—Cross-Connect Block Diagram


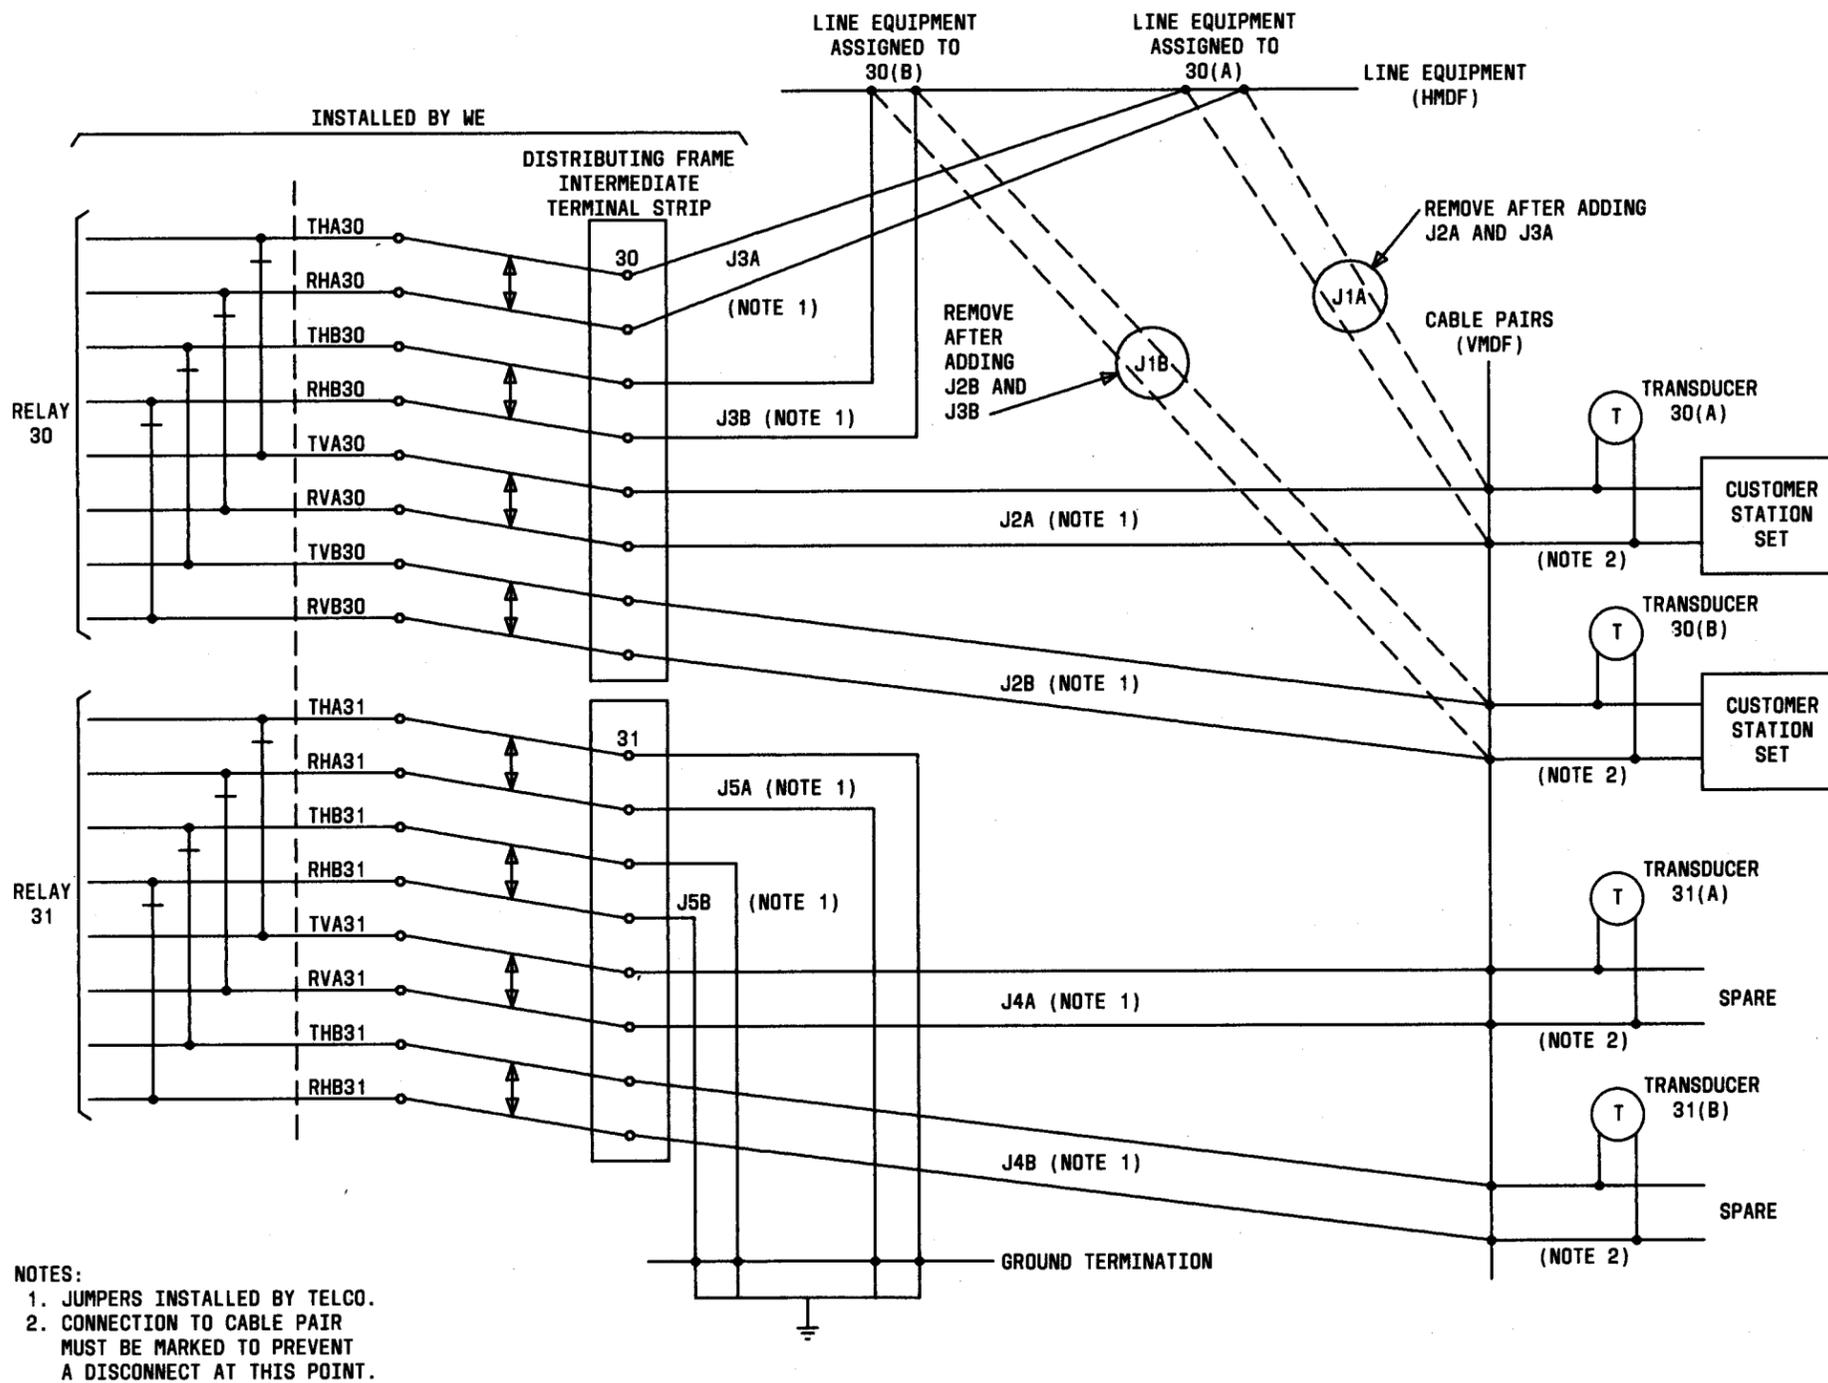


Fig. 2—Basic Wiring Diagram for Connections Between Access Circuits and Transducers

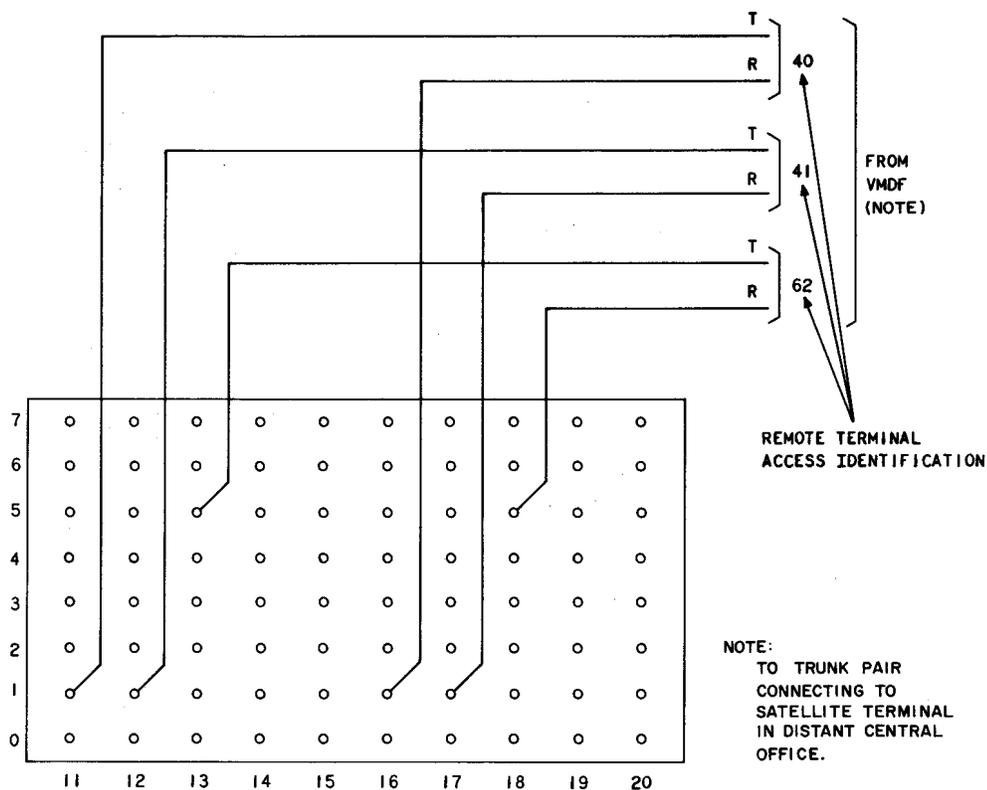

SIA2
SECTION OF SIA AUXILIARY TERMINAL STRIP ON HMDF

Fig. 3—Example of Satellite Terminal Dedicated Pair Assignment

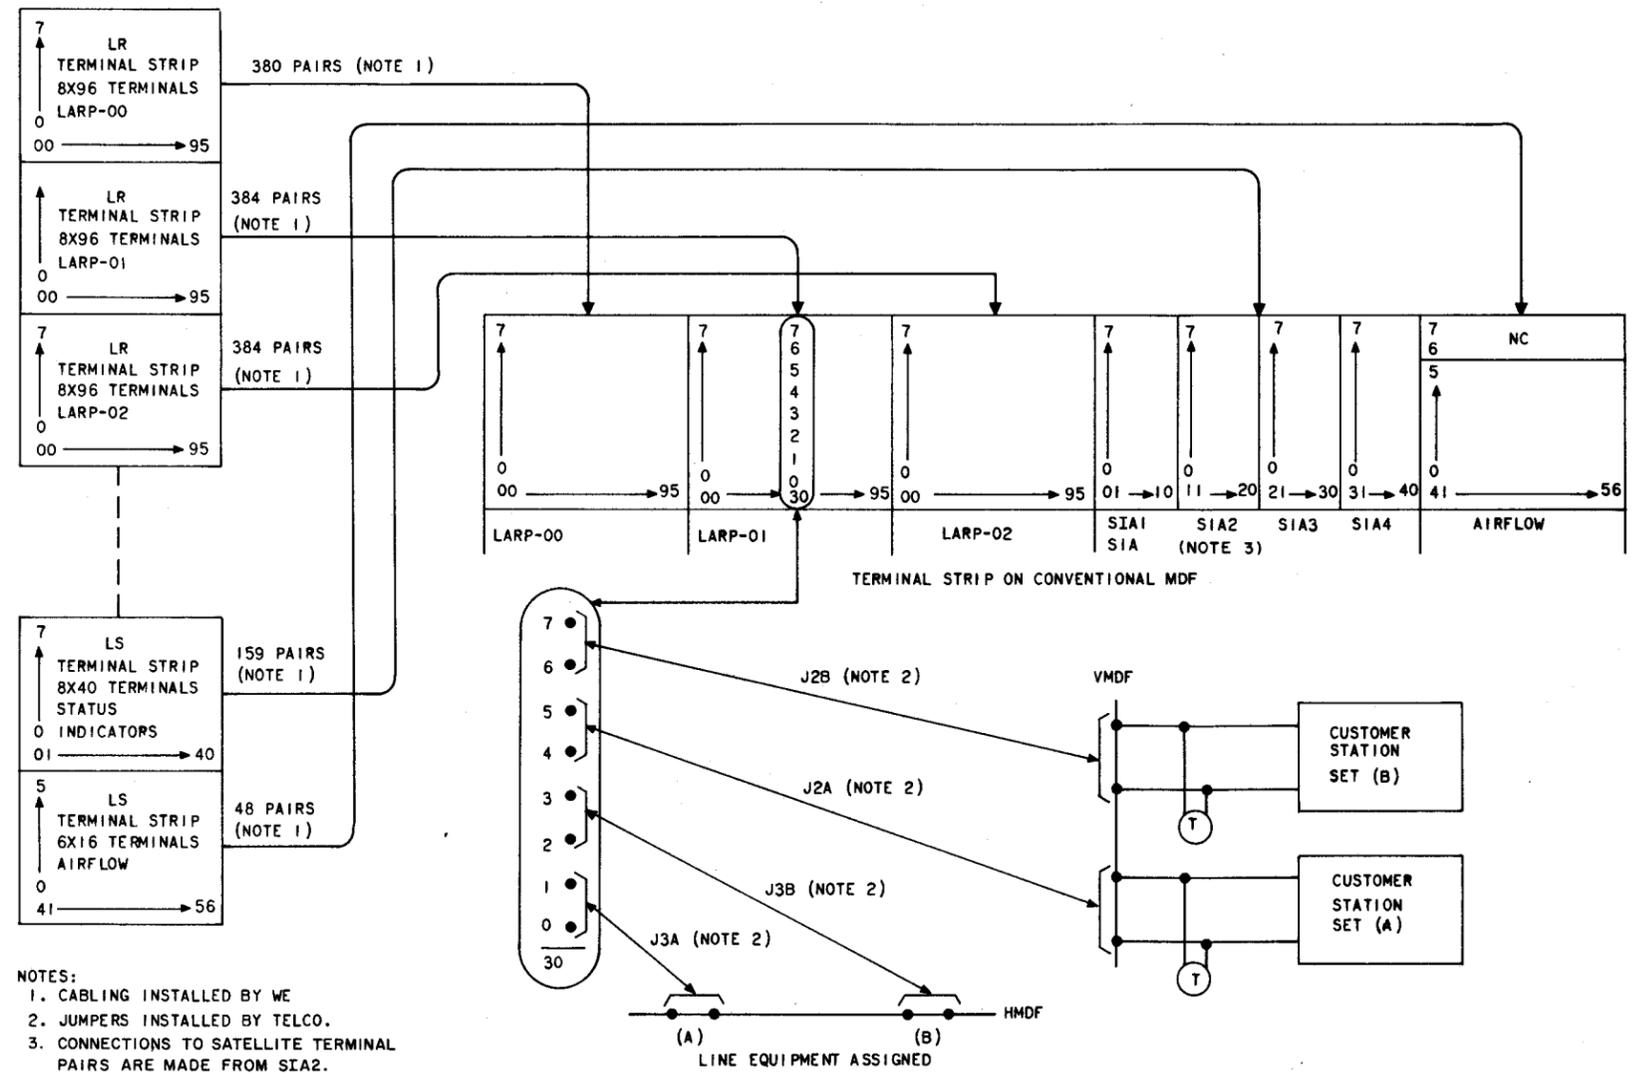


Fig. 5—Cabling and Cross-Connect Configuration for Conventional MDF

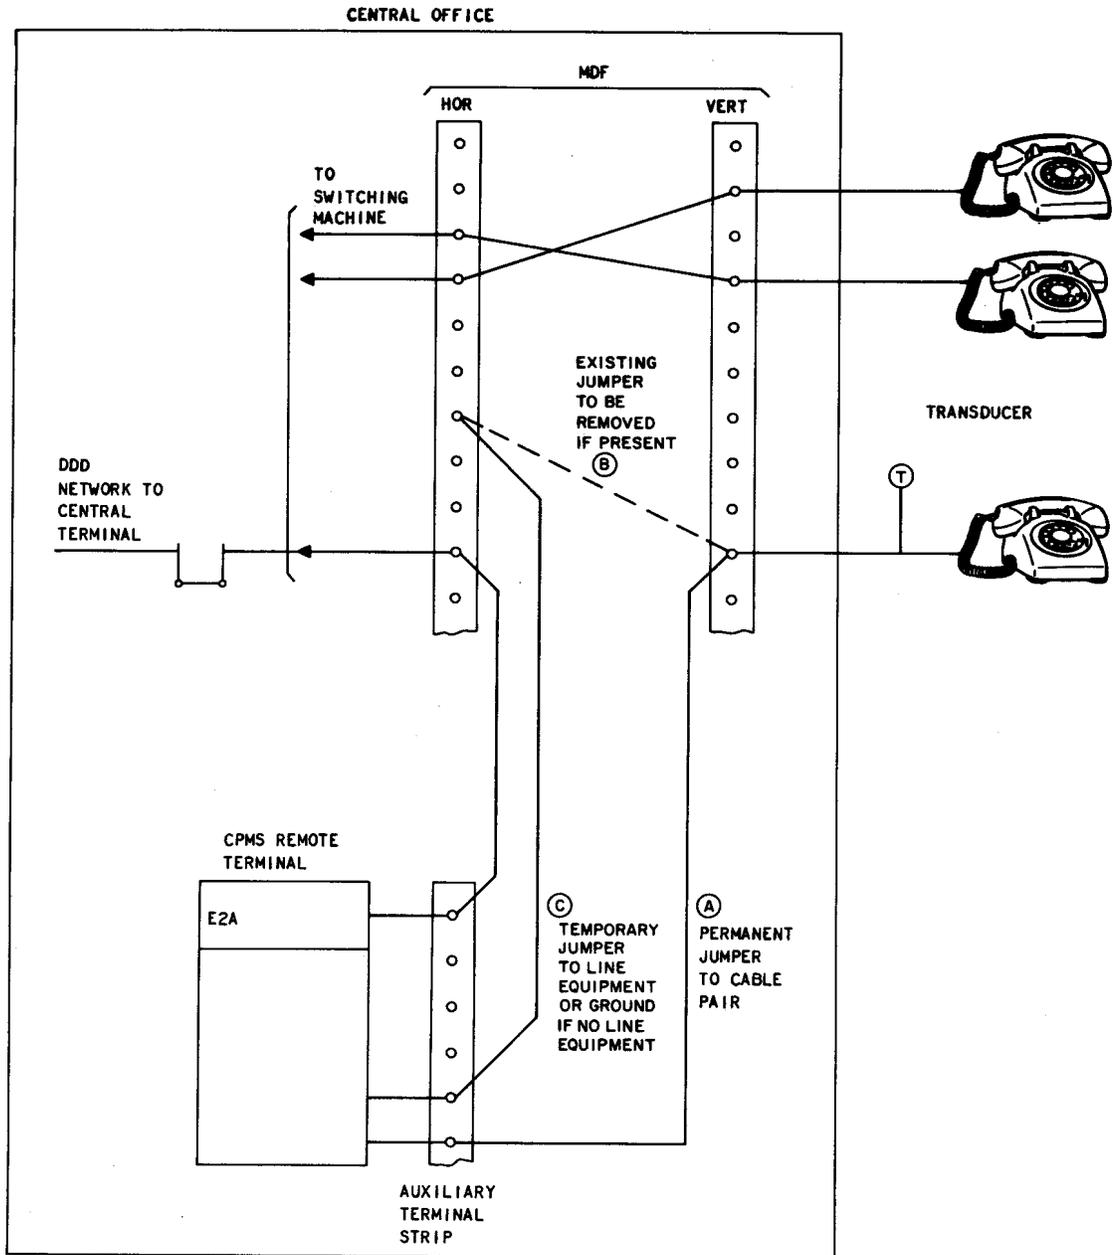


Fig. 6—Central Office


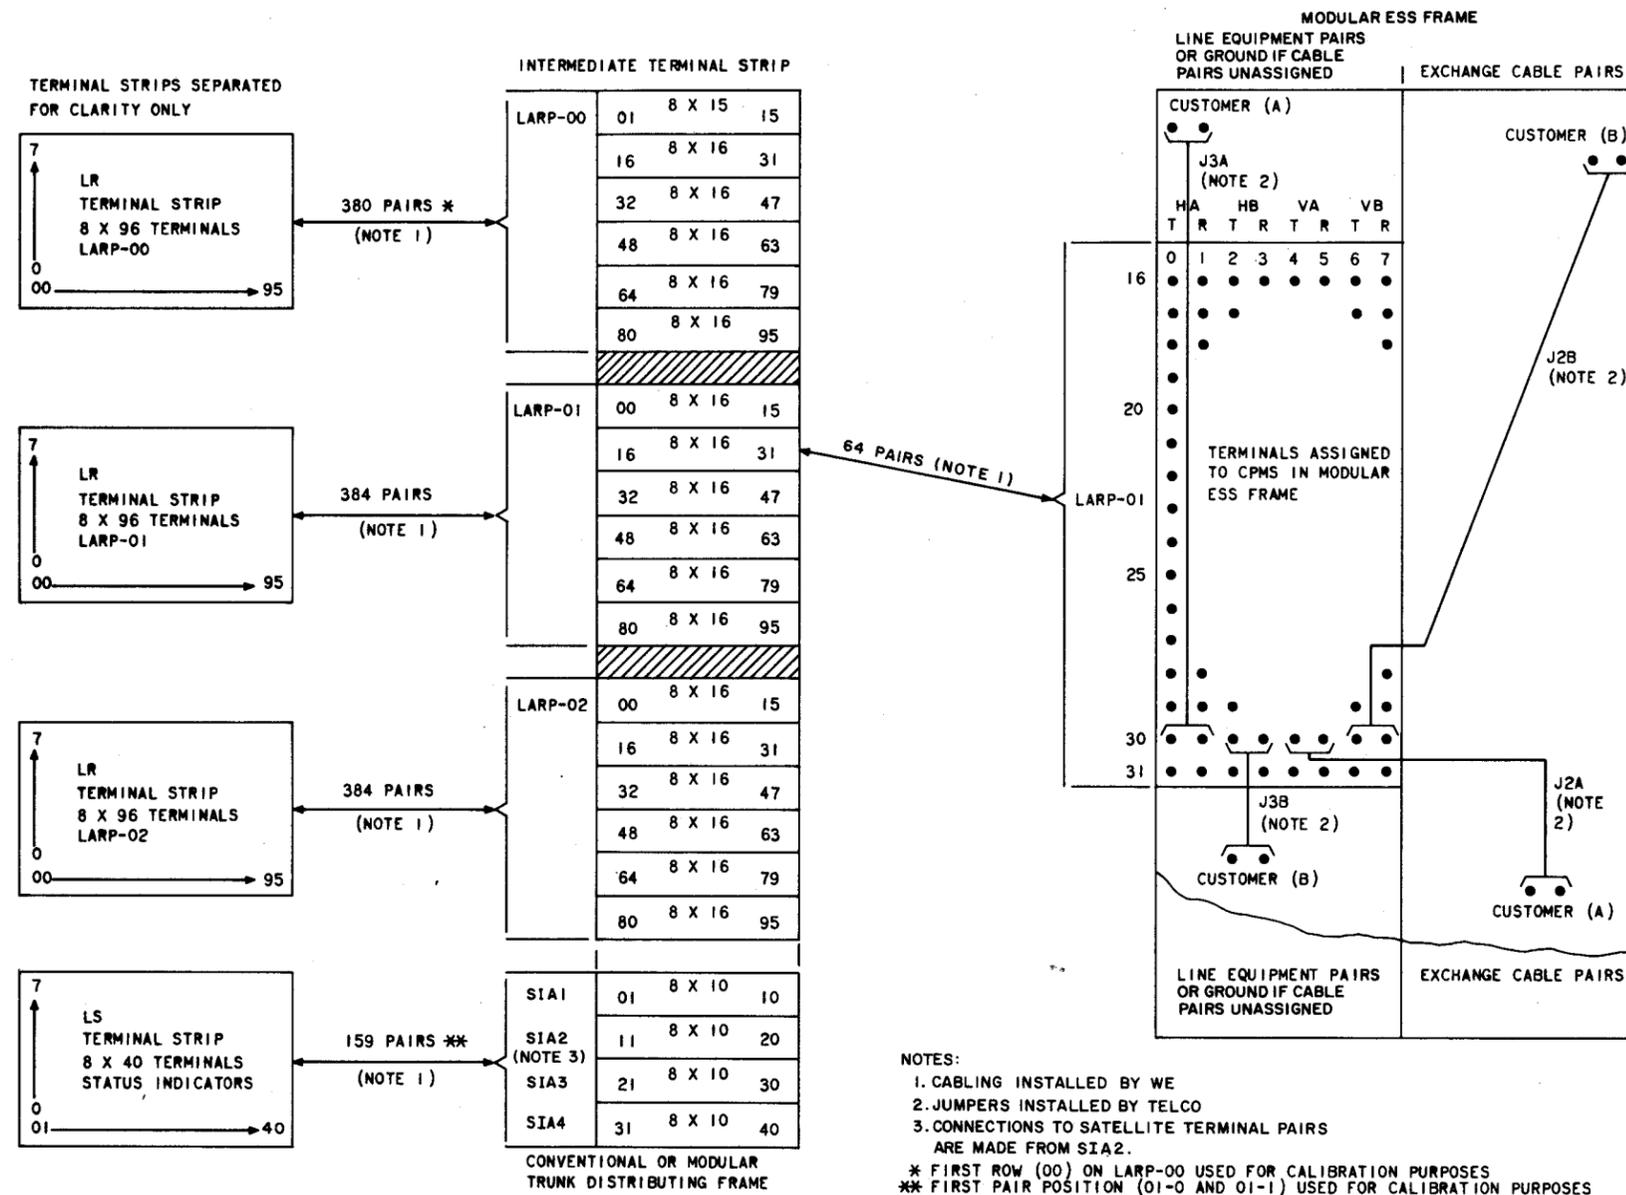


Fig. 7—Cross-Connect Configuration for Modular Type Frames

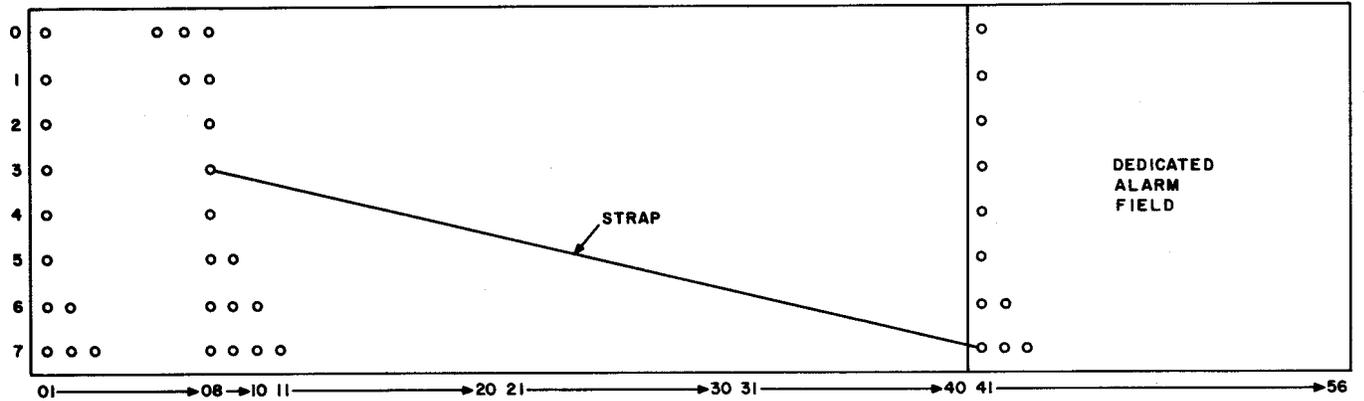

LS-TERMINAL STRIP

STRAP CONNECTING STATUS PAIR LOCATED ON TERMINALS
 LS-08-2 AND 3 TO FIRST DEDICATED ALARM PAIR
 LOCATION ON TERMINALS LS-41-6 AND 7
 EXAMPLE SHOWN IS STRAP FROM RING TERMINAL (RSI 17)
 LS-08-3 TO RING TERMINAL (RL1) LS-41-7

Fig. 8—Dedicated Alarm Connection