

PRELIMINARY

**Bell System Voice Communications
TECHNICAL REFERENCE**

**Voice
Connecting
Arrangement**

CED

**Interface
Specification**

April 1970

ENGINEERING DIRECTOR - CUSTOMER TELEPHONE SYSTEMS



PRELIMINARY

This Technical Reference is specifically intended for the developers and designers of telephone voice communications systems and equipment which interface with the Bell System telecommunications network and for technical consultants to use in designing communications systems and arrangements requiring connections to the Bell System telecommunications network. The right to revise this Technical Reference for any reason, including conformity with USASI, EIA, CCITT or other standards, to utilize new advances in the state of the technical arts, or to reflect changes in the design of the equipment and/or service described herein, is expressly reserved.

If further information is required, please contact:

Engineering Director - Customer Telephone Systems
American Telephone and Telegraph Company
195 Broadway
New York, New York 10007

PRELIMINARY

TABLE OF CONTENTS

	PAGE
1. GENERAL	1
2. SYSTEM DESIGN CONSIDERATIONS	1
2.1 Voice Connecting Arrangement CED	1
2.2 Service and Maintenance Considerations	2
2.21 Responsibility of the Customer	2
2.22 Responsibility of the Telephone Company	3
2.23 Trouble Reporting Procedure	4
2.3 Foreign and Surge Voltage Protection	4
2.4 Hazardous Voltage Limitations	5
3. DESCRIPTION OF VOICE CONNECTING ARRANGEMENT CED	6
3.1 Physical	6
3.2 Functions	6
3.3 Operation	7
3.4 Interface Leads	8
3.5 Method of Connection	9
4. ELECTRICAL CHARACTERISTICS	10
4.1 General	10
4.2 Transmission Path	10
4.21 Voice Signal Limiter	10
4.22 Transmission Parameters	10
4.23 DC Voltages	11
4.3 Signaling Paths	11
4.31 Service Request Path	11
4.32 Supervisory Path	12
4.33 Signal Alert Path	13
4.4 Grounding	13
5. POWER AND IMPEDANCE CONSIDERATIONS FOR CUSTOMER-PROVIDED EQUIPMENT	14
5.1 Average Power at the Central Office	14
5.2 Maximum Available Power	15
5.3 Signaling Considerations	15
5.4 Out-of-Band Limits	16
5.5 Internal Impedance	16
6. TESTING AND MEASURING METHODS	16
6.1 Measuring Maximum Available Power	16

PRELIMINARY

- 2 -

TABLE OF CONTENTS (CONT.)

	PAGE
7. TELECOMMUNICATIONS NETWORK CHARACTERISTICS	18
7.1 Transmission Parameters	18
7.2 End-to-End Electrical Loss	18
7.3 Bandwidth and Frequency Response	18
7.4 Nonlinearities	19
8. REFERENCES	20
9. GLOSSARY	22

LIST OF FIGURES

- Fig. 1 Voice Connecting Arrangement CED
- Fig. 2 Typical Interface Connecting Block
- Fig. 3 Block Diagram - Voice Connecting Arrangement CED
- Fig. 4 Simplified Schematic - Voice Connecting Arrangement CED

PRELIMINARY

The material in this Technical Reference is intended for use by designers and manufacturers of telephone equipment who expect to connect their communications equipment to the Bell System telecommunications network. This material covers guides which, if followed, should permit the transmission and reception of voice signals without interference to other Telephone Company services.

The responsibility of the Bell System with respect to the use of customer-provided equipment is as set forth in the appropriate Tariff regulations.

In furnishing this material, the Bell System Telephone Companies make no claims or representations and assume no responsibility, beyond that set forth in the Tariff regulations, for the suitability of the transmission path or the performance of the telecommunications system. The Bell System is in no way responsible for the design, performance, installation, operation or maintenance of the communications systems or equipment provided by others which are connected to the telecommunications network and does not endorse or approve any such system or equipment. The material in this Technical Reference is furnished in the interest of preventing interference to other Telephone Company services and users, and is not furnished with the intent to provide complete design specifications or parameters, or to assure the quality or performance of customer-provided telephone systems and equipment.

1. GENERAL

F.C.C. Tariff No. 263 and corresponding intrastate Tariffs filed by the Bell System, provide for the direct connection of customer-provided voice transmitting and receiving terminal equipment and communications systems to the Bell System telecommunications network. Direct electrical connection is made through a voice connecting arrangement furnished, installed, and maintained by the Telephone Company. The Tariffs also provide for the indirect (acoustic or inductive) connection of such equipment or systems.

In addition, the Bell System retains responsibility for network control signaling. This includes dialing and control functions, as well as responsibility for the protective function of voice signal limiting and isolation of Central Office battery from the customer-provided equipment.

The connection service described in this Technical Reference is identified by the Telephone Company as Voice Connecting Arrangement CED and should be ordered as such. Contact your local Telephone Company business office or Marketing representative for information regarding rates for, and the availability of, this voice connecting arrangement for both new and additional service.

2. SYSTEM DESIGN CONSIDERATIONS

2.1 Voice Connecting Arrangement CED

Voice Connecting Arrangement CED provides a means for automatically connecting a customer-provided dial communications system to a Telephone Company toll switchboard position operator. This arrangement handles

calls in either direction and is intended for coupling voice signals only. A talking path is established over the transmission leads. Two additional sets of dry contacts are provided to the customer for seizure and ringing indication. It is necessary for the customer to provide a dry contact over a pair of leads for service request indication and answer/disconnect supervision.

2.2 Service and Maintenance Considerations

2.21 Responsibility of the Customer

The Tariffs permitting direct electrical connection of customer-provided communications systems state that:

Where long distance message telecommunications service is available under this Tariff for use in connection with customer-provided communications systems the operating characteristics of such systems shall be such as not to interfere with any of the services offered by the Telephone Company. Such use is subject to the further provisions that the customer-provided systems do not endanger the safety of Telephone Company employees or the public; damage, require change in or alteration of, the equipment or other facilities of the Telephone Company; interfere with the proper functioning of such equipment or facilities; impair the operation of the telecommunications system or otherwise injure the public in its use of the Telephone Company's services. Upon notice from the Telephone Company that the customer-provided system is causing or is likely to cause such hazard or interference the customer shall make such change as shall be necessary to remove or prevent such hazard or interference.

2.22 Responsibility of the Telephone Company

The Tariffs permitting direct electrical connection of customer-provided communications systems state that:

The Telephone Company shall not be responsible for the installation, operation, or maintenance of any customer-provided communications systems. Long distance message telecommunications service is not represented as adapted to the use of customer-provided systems and where such systems are connected to Telephone Company facilities the responsibility of the Telephone Company shall be limited to the furnishing of facilities suitable for long distance message telecommunications service and to the maintenance and operation of such facilities in a manner proper for such telecommunications service; subject to this responsibility the Telephone Company shall not be responsible for (i) the through transmission of signals generated by the customer-provided systems or for the quality of, or defects in, such transmission, or (ii) the reception of signals by customer-provided systems.

The Telephone Company shall not be responsible to the customer or otherwise if changes in minimum network protection criteria contained in the Tariffs and Paragraph 5 of this Technical Reference, or in any of the facilities, operations, or procedures of the Telephone Company render any customer-provided facilities obsolete or require modification or alteration of such equipment or otherwise affect its use or performance.

2.23 Trouble Reporting Procedure

When trouble is experienced with this service, the customer should perform the necessary testing to sectionalize the difficulty by opening the circuit at the Interface Connecting Block and testing only toward the customer-provided equipment. If the tests indicate that the trouble is in the Telephone Company-provided equipment, it should be promptly reported to the Telephone Company. Trouble reports should be called into the listed "Repair Service" number which can be found in the front of the telephone directory. The repair attendant should be given:

- (a) Customer's name.
- (b) Customer's address.
- (c) Listed telephone number.
- (d) Description of the trouble.
- (e) Customer's contact for additional information.

2.3 Foreign and Surge Voltage Protection

Where telephone lines are exposed to lightning, power circuit contact, or induction, protective devices are installed at the Central Office and on the customer's premises that will provide a path to ground for foreign voltages that exceed about 600 volts peak. Since the customer's equipment is connected to the telephone line through the voice connecting arrangement, the customer's equipment is protected from longitudinal surges by transformer isolation. The maximum surge between the transmission leads (conductors) that the customer's equipment may encounter due to foreign potential is 30 volts. The surge potentials on the other conductors of the voice connecting arrangement will not exceed about 600 volts peak.

The customer is responsible for providing protection, internal to his equipment and facilities, against foreign and surge voltages from his equipment and facilities being applied to the voice connecting arrangement. The surge potential on the transmission leads shall be limited to 30 volts. The surge potential on the other conductors shall be limited to 600 volts peak between conductors or from one conductor to ground.

2.4 Hazardous Voltage Limitations

When it is necessary for the customer to apply an operational voltage to facilities interconnected with telephone facilities, certain voltage limitations shall be observed. These limitations are for the purpose of providing adequate protection to personnel and plant facilities. Unless otherwise specified in Paragraphs 4.2 and 4.3 of this Technical Reference, steady-state voltages applied by customer-provided equipment to conductors connected to Voice Connecting Arrangement CED should not exceed the following:

	<u>dc</u>	<u>ac(RMS)</u>
Maximum voltage, any conductor to ground	135	50
Maximum voltage, conductor to conductor	(135 (270*)	(50 (100*)

*Permitted only if voltage source is center-tapped to ground.

The power supplies and wiring methods used in the customer-provided equipment should meet the provisions of the National Electrical Code (NEC), Article 725, for Class 2 remote control and signal circuits.

3. DESCRIPTION OF VOICE CONNECTING ARRANGEMENT CED

3.1 Physical

The voice connecting unit of Voice Connecting Arrangement CED (Fig. 1) will be mounted by the Telephone Company in a panel that will accommodate a maximum of 14 of these units. The unit will function satisfactorily within a temperature range of 0° to 55°C and a humidity range from 5 to 95 percent. Leads from the unit will be terminated on a Telephone Company-provided Interface Connecting Block (Fig. 2) conveniently located to permit testing, maintenance trouble isolation, and ease of connection to the customer-provided equipment. The customer-provided equipment should be located so that the maximum external loop resistance across the CS and CG leads measured at the Interface Connecting Block shall not exceed 8.5 ohms when indicating a closure.

3.2 Functions

The major functions of this voice connecting arrangement are:

- (a) To protect Telephone Company personnel and equipment from hazardous voltages which may be applied at the interface.
- (b) To detect a request for service from the customer-provided equipment that provides a signal to the Bell System toll operator when the arrangement is seized by the customer-provided equipment.
- (c) To provide access for voice signals between the customer-provided equipment and the telecommunications network via the Telephone Company toll operator.

- (d) To detect ringing signals from the Telephone Company toll operator that provides ringing indication to the customer-provided equipment to cause the PBX attendant to be alerted.
- (e) To limit abnormally high voice signal levels to the telecommunication network.
- (f) To provide dc isolation to the customer-provided equipment.

3.3 Operation

The customer-provided equipment provides a service request indication by closing a contact which connects the SERVICE REQUEST leads (CS and CG) together (Figs. 3 and 4). There is no audible ring applied to the circuit after the service request has been made. If audible ring is desired for the station user, the signal must be provided by the customer-provided equipment. The answer of the toll operator is detected by the voice connecting unit and a supervision signal (contact closure) is transmitted to the customer-provided equipment over the SUPERVISORY leads (CBS1 and CBS2) signifying that the toll operator is ready to receive instructions. The customer gives verbal instructions to the toll operator who completes the call. The contact closure on the SUPERVISORY leads will remain closed as long as the toll operator is connected to the Central Office end of the circuit.

Upon completion of the call, the customer's station opens the contacts of the SERVICE REQUEST leads by going on-hook. This causes a disconnect signal to be sent to the toll operator.

To reach the PBX attendant, the toll operator may then apply ringing to the line, which is detected by the voice connecting unit and transmitted to the customer's equipment as a contact closure over the SIGNAL ALERT leads (C1 and C2). The customer's PBX attendant answers by closing the contacts of the SERVICE REQUEST leads. The talking path is completed and the time and charges information is obtained from the toll operator. This ring-back capability is included as part of the voice connecting arrangement even though the time and charge information is sent by some other means.

The customer's PBX attendant disconnects by opening the SERVICE REQUEST contacts, thus sending a disconnect signal to the toll operator. When the toll operator disconnects by removing battery and ground from the line, the voice connecting unit opens the SUPERVISORY leads to the customer-provided equipment. The voice connecting unit then returns to its idle condition.

If the toll operator disconnects first, the PBX attendant must disconnect (by opening the SERVICE REQUEST leads) in order to return the voice connecting unit to its idle state. The SUPERVISORY leads will open approximately one-half second after the toll operator disconnects.

3.4 Interface Leads

Eight interface leads per circuit are provided from Voice Connecting Arrangement CED to the Interface Connecting Block (Fig. 2) for the customer's use. Technical information pertaining to these leads is discussed in Paragraph 4.

The first pair of leads, designated CT and CR, provides for the two-way voice transmission path from the voice connecting arrangement. The second pair, designated CS and CG, provides for the function of request for service on an outgoing call, and for answering an incoming ring. The third pair, designated C1 and C2, provides for the function of alerting the attendant on an incoming ring from the toll operator. The fourth pair, designated CBS1 and CBS2, provides for the indication of seizure of the voice connecting arrangement.

3.5 Method of Connection

Leads from Voice Connecting Arrangement CED will be terminated by the Telephone Company on the Interface Connecting Block. The customer or his representative must provide and install the conductors from the customer-provided equipment to the block and make the necessary connections to associate his equipment with the voice connecting arrangement at this Interface Connecting Block using 22 gauge wire or smaller. The leads will be designated as follows:

<u>Lead Designation</u>	<u>Function</u>
CT CR	voice transmission pair
CS CG	service request pair
C1 C2	signal alert pair
CBS1 CBS2	supervisory pair
2	designates second circuit
3	designates third circuit

4. ELECTRICAL CHARACTERISTICS

4.1 General

The insertion loss of Voice Connecting Arrangement CED is a nominal one (1) dB over the voice frequency range of 300 to 3000 Hz. No voice signal amplification is provided.

4.2 Transmission Path

4.21 Voice Signal Limiter

A voice signal limiter is incorporated in the transmission path (Fig. 4) to protect the Bell System telecommunications network from applications of abnormally high signal levels. This has no effect on normal voice signal levels.

This limiter does not remove the customer's responsibility to meet the network protection criteria as prescribed in the Tariffs and as outlined in Paragraph 5 of this Technical Reference.

4.22 Transmission Parameters

Voice Connecting Arrangement CED provides a one-to-one impedance transformation. The input impedance is a function of the impedance of the voice arrangement and the impedance of the loop to the Central Office. For design purposes, the input impedance of this voice connecting arrangement should be considered to be 600 ohms and, therefore, the impedance of the customer-provided equipment should also be 600 ohms.

The voice signal levels must comply with the applicable Tariffs.

The Tariffs permitting electrical connection of customer-provided communications systems state:

"To prevent excessive noise and crosstalk in the network, it is necessary that the power of the signal at the Central Office not exceed 12 dB below one milliwatt when averaged over any 3-second interval. To insure that this limit is not exceeded, the power of the signal which may be applied by the customer-provided equipment to the Telephone Company interface located on the customer's premises will be specified for each type of connecting arrangement, but in no case shall it exceed one milliwatt."

For Voice Connecting Arrangement CED the maximum permissible voice signal power at the Interface Connecting Block is -9 dBm when averaged over any 3-second interval.

4.23 DC Voltages

The maximum dc voltage across terminals CT and CR or from ground to CT or CR, measured at the Interface Connecting Block, shall not exceed 100 volts. The dc signals from the customer-provided equipment are blocked by a capacitor in the coupler.

4.3 Signaling Paths

4.31 Service Request Path

The SERVICE REQUEST leads (CS and CG) will provide a means of initiating an outgoing call or answering an incoming call. To answer an incoming ring from the toll operator, the customer-provided equipment

PRELIMINARY

- 12 -

must provide a closure between the CS and CG leads and must maintain that closure for the duration of the call. The customer must open these leads to signal a disconnect until an open appears on the SUPERVISORY leads CBS1 and CBS2. When a call is initiated from the customer-provided equipment, a closure is expected between the CS and CG leads and must be maintained for the duration of the call. A transmission path will be cut through after the toll operator answers. The CS lead of the SERVICE REQUEST pair has a maximum of -26 volts dc. The CG lead is grounded at the voice connecting unit.

The SERVICE REQUEST pair will load the customer's supervisory contact with .05 ampere, maximum noninductive load. The minimum open circuit insulation resistance between the CS and CG leads and from either lead to ground should be 100,000 ohms. The maximum external loop resistance across the CS and CG leads measured at the Interface Connecting Block shall not exceed 8.5 ohms when indicating a closure.

4.32 Supervisory Path

The SUPERVISORY leads (CBS1 and CBS2) provide an immediate contact closure to the customer when the Bell System toll operator answers the request for service or seizes the circuit to ringback to the PBX operator. This closure is maintained for the duration of the call and will be open circuited when the Central Office side of the voice connecting unit returns to the idle condition. The customer's equipment load on the SUPERVISORY leads shall not exceed .25 ampere noninductive.

4.33 Signal Alert Path

The SIGNAL ALERT leads (C1 and C2) provide a contact closure to the customer which follows the ringing cycle from the toll operator. The closure between these leads will open and remain open when the customer answers the ringing. The customer's equipment load on the SIGNAL ALERT leads shall not exceed .25 ampere noninductive.

4.4 Grounding

In general, it is desirable that circuits in the customer's equipment which connect to the voice connecting arrangement have some path to ground. A direct or resistive ground on one side of the power supply would be an example of such a path. This practice avoids the possibility of the entire circuit involved being at an indeterminate potential with respect to ground. Such a potential, perhaps as a result of electrostatic induction, could result in an insulation breakdown in this arrangement. It is expected that the customer's equipment, if powered from commercial power, will be grounded in accordance with applicable electrical codes (NEC) and should be bonded to the telephone protector ground when available. Self-powered or passive customer's equipment need not be grounded.

Voice Connecting Arrangement CED is provided with a common signal ground which must be bonded to a metallic cold water pipe or other NEC approved ground serving as the electric power ground and telephone protector ground where present. The CG lead of the SERVICE REQUEST pair is grounded at the unit. If necessary, this SERVICE REQUEST ground

lead may be connected to the frame ground of the customer's equipment. It is not permitted to derive the main ground for the customer's equipment through this lead from the voice connecting arrangement.

As an example, a good ground may be obtained with a proper connection to a metallic cold water pipe, using a single No. 6 AWG copper conductor. The other end should be connected to the ground return terminal of the customer's equipment. The run should be short, straight, and if possible, a continuous piece of wire. Proper attention should be given to providing the lowest possible resistance connection at each end of the circuit. It is imperative that this ground be connected at the same location to the water piping system serving as the telephone protector or signal ground but not on the telephone ground clamp. This lead shall not be fused.

5. POWER AND IMPEDANCE CONSIDERATIONS FOR CUSTOMER-PROVIDED EQUIPMENT

5.1 Average Power at the Central Office

The average power (in any 3-second interval) delivered to a 900 ohm resistive load at the local Central Office should not exceed -12 dBm. The limitations described in 5.2 below, on power at the customer's location have been set to meet an average of -12 dBm when all loops in the Bell System are considered.

5.2 Maximum Available Power

The local Central Office power criteria, in 5.1 above, can be satisfied by limiting the maximum available power* from a customer-provided 600 ohm source to -9 dBm when averaged over any 3-second interval. The customer-provided communications system should be so designed that the average power over any 3-second interval applied to the Interface Connecting Block associated with Voice Connecting Arrangement CED does not exceed -9 dBm. The recommended procedure for estimating the power is given in Paragraph 6.

5.3 Signaling Considerations

The telecommunications network incorporates tone signaling devices that are used for network control functions. These devices, connected at all times to the telephone circuit, are designed to be sensitive to single frequency tones at 2600 Hz. They are, however, relatively insensitive to energy at this frequency if sufficient energy is present at the same time in other frequencies in the voiceband.

In order to prevent the interruption or disconnection of a call, or interference with network control signaling, it is necessary that the signal applied by the customer-provided equipment to the voice connecting arrangement at no time have energy solely in the 2450 to 2750 Hz band. If signal power is in the 2450 to 2750 Hz band, it must not exceed the power present at the same time in the 800 to 2450 Hz band.

*The available power of a source is the maximum power that the source can deliver to a load. Maximum power transfer occurs when the load and source impedances are matched.

5.4 Out-of-Band Limits

To protect other services it is necessary that the signal applied by the customer-provided equipment to the Telephone Company interface located on the customer's premises meet the following limits:

- (a) The power in the band from 3995 Hz to 4005 Hz shall not exceed 27 dB below the power of one milliwatt.
- (b) The power in the band from 4000 Hz to 10,000 Hz shall not exceed 16 dB below one milliwatt.
- (c) The power in the band from 10,000 Hz to 25,000 Hz shall not exceed 24 dB below one milliwatt.
- (d) The power in the band from 25,000 Hz to 40,000 Hz shall not exceed 36 dB below one milliwatt.
- (e) The power in the band above 40,000 Hz shall not exceed 50 dB below one milliwatt.

5.5 Internal Impedance

The internal impedance of the customer's equipment should be approximately 600 ohms.

6. TESTING AND MEASURING METHODS

6.1 Measuring Maximum Available Power

The following measuring method is satisfactory for estimating the maximum power averaged over a 3-second interval to determine that the inband criterion is being met:

Operate the customer-provided equipment into a 600 ohm load, (this assumes that the customer-provided equipment has a 600 ohm source impedance)

PRELIMINARY

- 17 -

bridged by a Hewlett-Packard Telephone Test Meter 3555B or a Western Electric 3C (3A) Noise Measuring Set, or the equivalent.* The meter FUNCTION switch should be in the BRIDGE position (and for the Hewlett-Packard meter, the 600 ohm key should be operated), the slide switch marked DAMP/NORM in the DAMP position, and 3 kHz flat weighting should be used. In almost all cases the speech power, averaged over any 3-second interval, will not exceed -9 dBm if the maximum meter swing does not exceed 84 dBrn.

The accuracy of this method can be somewhat improved by increasing the size of the damping capacitance in the Western Electric 3C (3A) Noise Meter by 150 microfarads. To do this, connect the negative lead of a 150 microfarad capacitor to either terminal of the NORM/DAMP switch and connect the positive lead to ground. This allows the meter to more nearly approximate a 3-second averaging meter. (NOTE: This modification does not necessarily hold for noise meters other than the Western Electric 3C [3A].) With the additional damping the power averaged over any 3-second interval will not exceed -9 dBm if the maximum meter swing does not exceed 82 dBrn. The use of meters with shorter time constants, such as a VU meter or a standard volt meter, is not recommended.

*These meters do not have a 3-second averaging time, but when used on speech they give a reliable estimate of a 3-second average.

7. TELECOMMUNICATIONS NETWORK CHARACTERISTICS

7.1 Transmission Parameters

Information describing the component parts and operating characteristics of the Bell System telecommunications network has been published. Various articles listed in Paragraph 8 have discussed statistical information on talker volumes (a), end-office losses and noise (b-d), loop characteristics (e), and other characteristics (f-h). In addition, five general information texts are listed.

The 1000 Hz insertion loss for this voice connecting arrangement (with a customer's communication device having a 600 ohm source impedance) and its associated loop to the toll operator will average about 6 dB with a standard deviation of about 1.5 dB.

7.2 End-to-End Electrical Loss

The end-to-end electrical loss of a connection is a function of the impedance of both end terminations, the losses of the loops at both ends, and the end-office loss. The information given in the REFERENCES may be used to determine statistical loss distributions for different types of calling patterns of the telephone network.

7.3 Bandwidth and Frequency Response

The nominal voice frequency bandwidth of the telecommunications network extends from about 300 to about 3000 Hz. In general, an end-to-end connection may be expected to have a loss characteristic which increased with increasing frequencies in the upper half of the band. This voice connecting arrangement does not limit this bandwidth.

7.4 Nonlinearities

Nonlinearities such as compression, clipping, and harmonic distortion can exist on the telecommunications network. Normally, these are low enough to be ignored. It is expected that total harmonic distortions no greater than about 5 percent of the fundamental will normally be encountered.

8. REFERENCES

Some references describing various transmission characteristics of the telecommunications network are listed below:

- (a) McAdoo, K. L., "Speech Volumes on Bell System Message Circuits - 1960 Survey," Bell System Technical Journal (BSTJ), Vol. 42, No. 5 (September 1963), p. 1999.
- (b) Nasell, I., "The 1962 Survey of Noise and Loss on Toll Connections," BSTJ, Vol. 43, No. 2 (March 1964), p. 697.
- (c) Nasell, I., "Some Transmission Characteristics of Bell System Toll Connections," BSTJ, Vol. 47, No. 6 (July-August 1968), p. 1001.
- (d) Nasell, I.; Ellison, C. R.; and Homstrom, R., "The Transmission Performance of Bell System Intertoll Trunks," BSTJ, Vol. 47, No. 8 (October 1968), p. 1561.
- (e) Hinderliter, R. G., "Transmission Characteristics of Bell System Subscriber Loop Plant," IEEE Transactions, Communications, and Electronics, September 1963, p. 464.
- (f) Alexander, A. A.; Gryb, R. M.; and Nast, D. W., "Capabilities of the Telephone Network for Data Transmission," BSTJ, Vol. 39, No. 3 (May 1960), p. 431.
- (g) Breen, C., and Dahlbom, C. A., "Signaling Systems for the Control of Telephone Switching," BSTJ, Vol. 39, No. 6 (November 1960), p. 1381.

- (h) Bodle, D. W., and Gresh, P. A., "Lightning Surges in Paired Telephone Cable Facilities," BSTJ, Vol. 40, No. 2 (March 1961), p. 547.
- *(i) "Principles of Electricity Applied to Telephone and Telegraph Work," by American Telephone and Telegraph Company, New York, New York.
- *(j) "Switching Systems," by American Telephone and Telegraph Company, New York, New York.
- (k) "Notes on Transmission Engineering," by United States Independent Telephone Association, Washington, D.C.
- *(l) "Notes on Distance Dialing - 1968," by American Telephone and Telegraph Company, New York, New York.
- *(m) "Transmission Systems for Communications," by Bell Telephone Laboratories.

*Available through Graybar Electric Company.

9. GLOSSARY*

COMMUNICATIONS SYSTEMS - denotes channels and other facilities which are capable, when not connected to Long Distance Message Telecommunications Service of communications between customer-provided terminal equipment or Telephone Company stations.

CUSTOMER-PROVIDED TERMINAL EQUIPMENT - denotes devices or apparatus and their associated wiring, provided by a customer, which do not constitute a communications system and which, when connected to the communications path of the telecommunications system, are so connected either electrically, acoustically or inductively.

END-OFFICE - the last serving Central Office in the switching hierarchy of the telecommunications network.

INTERFACE CONNECTING BLOCK - the Telephone Company furnished connecting point to which the customer brings and connects the leads of his equipment, and to which the Telephone Company brings and connects leads from the voice connecting arrangement.

NETWORK CONTROL SIGNALING - denotes the transmission of signals used in the telecommunications system which perform functions such as supervision (control, status, and charging signals), address signaling (e.g., dialing), calling and called number identification, audible tone signals (call progress signals indicating reorder or busy conditions, alerting, coin denominations, coin collect and coin return tones) to control the operation of switching machines in the telecommunications system.

*May differ in letter from exact wording as used in the Tariffs.

OFF-HOOK SUPERVISION - the conditioning of the SERVICE REQUEST leads by the customer-provided equipment which indicates a customer's telephone is answering or originating a call.


ON-HOOK SUPERVISION - the conditioning of the SERVICE REQUEST leads by the customer-provided equipment which indicates that the customer's equipment has disconnected, or that the equipment is idle.

TELECOMMUNICATIONS NETWORK - the Bell System voice switching equipment, associated interconnecting facilities and station equipment which connected its customers together.


TELEPHONE COMPANY - denotes the American Telephone and Telegraph Company, Long Lines Department, its concurring carriers and its connecting carriers, either individually or collectively.

VOICE CONNECTING ARRANGEMENT - Voice Connecting Arrangement CED provided by the Telephone Company to accomplish the direct electrical connection of customer-provided facilities with the facilities of the Telephone Company.


VOICE CONNECTING UNIT - that portion of Voice Connecting Arrangement CED that provides the interconnection function between the customer-provided equipment and the telecommunications network.

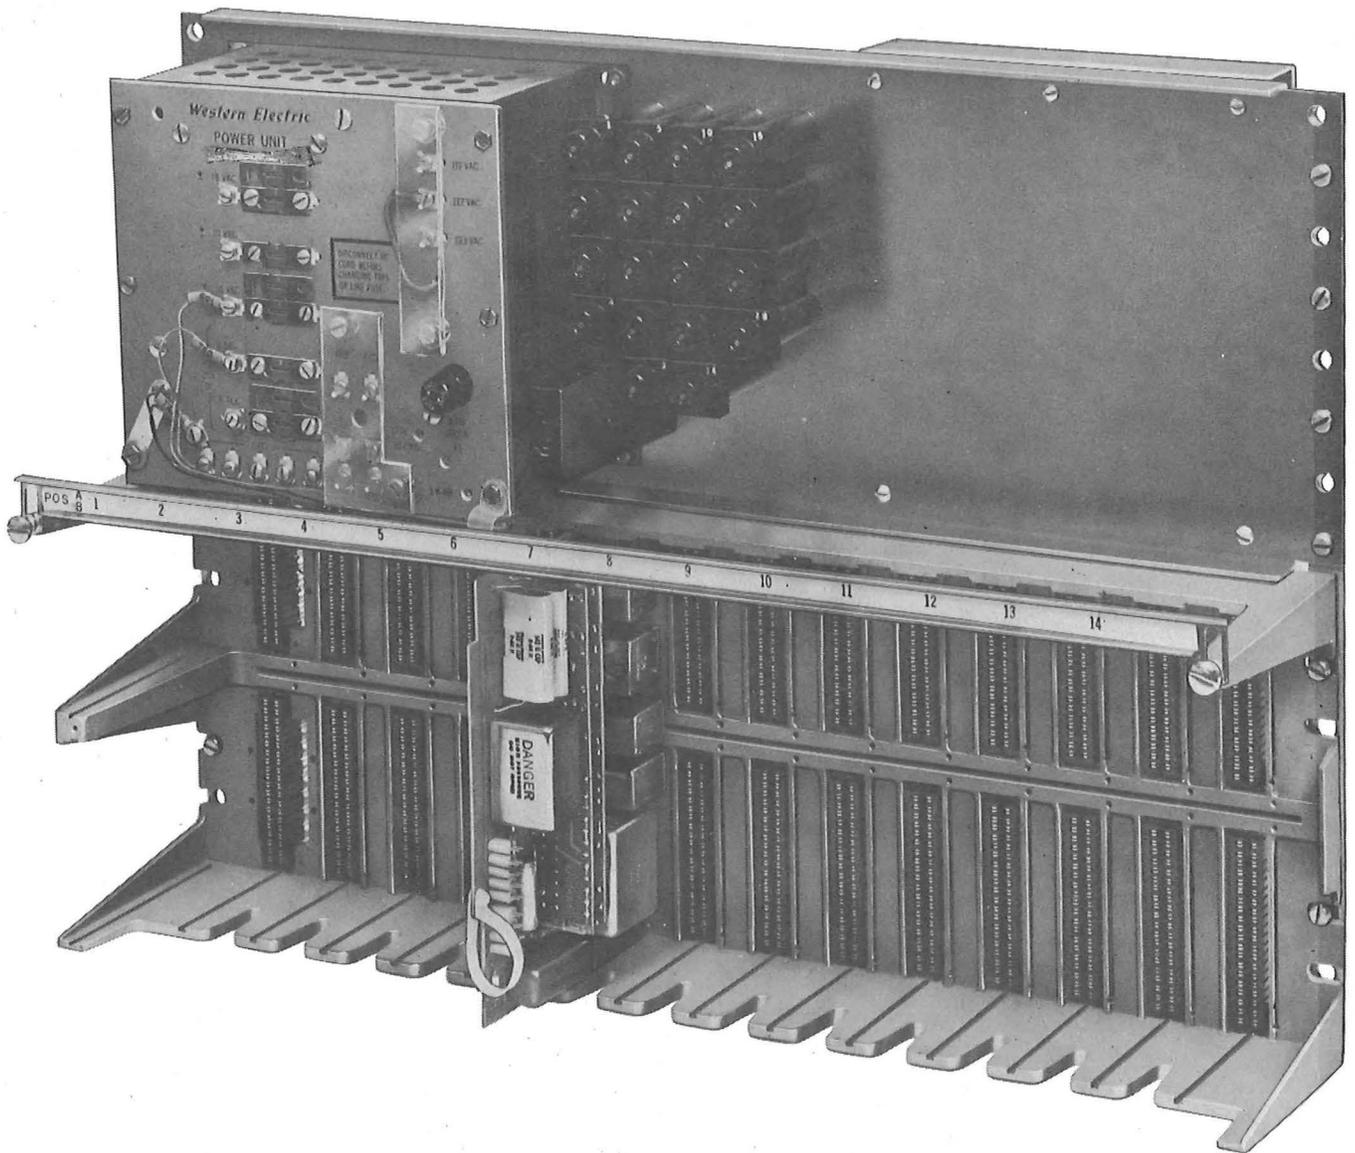


VOICE CONNECTING ARRANGEMENT CED
FIG. 1

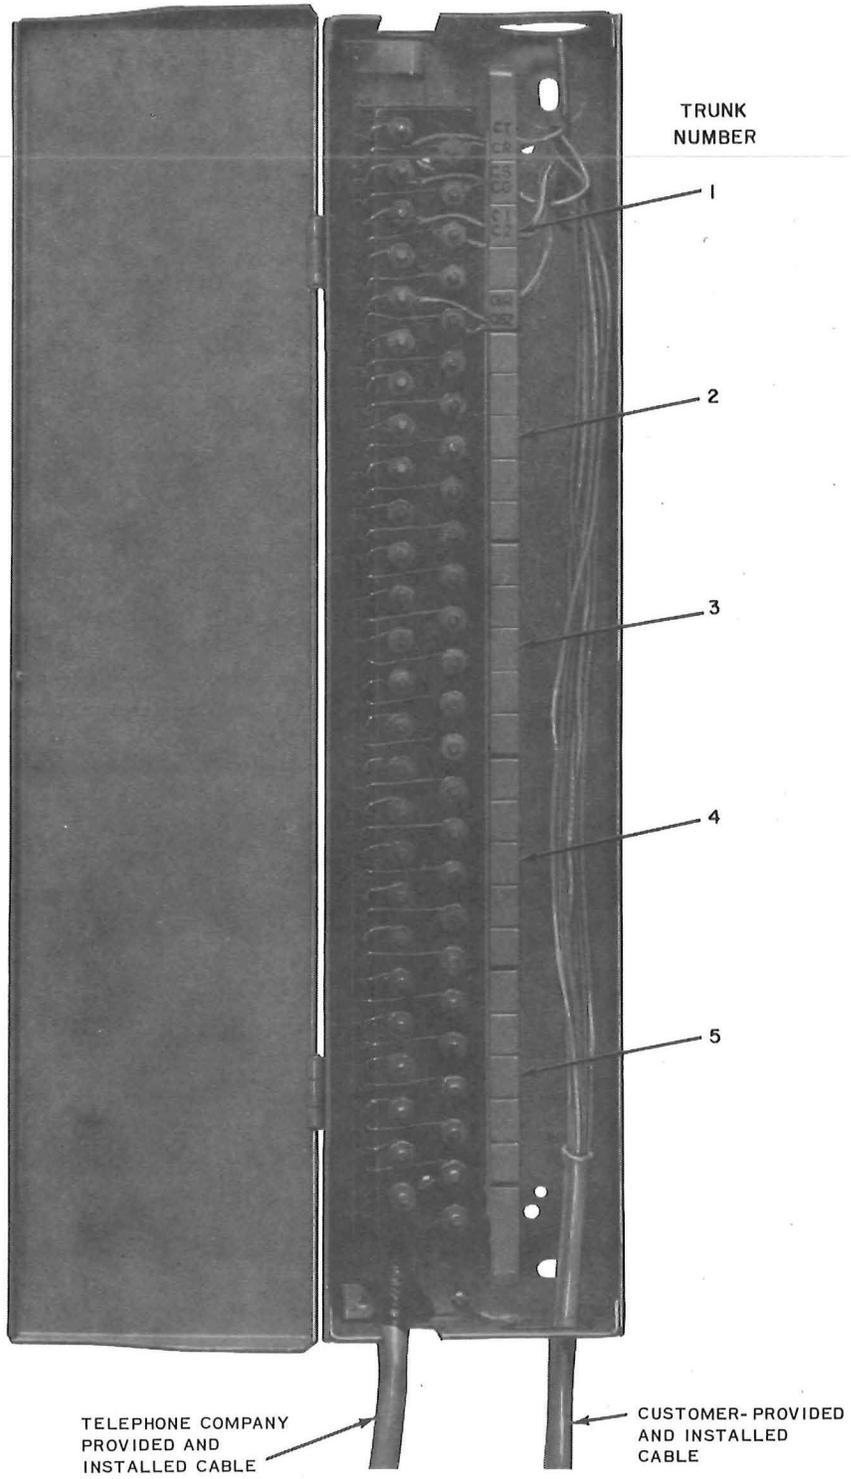

TYPICAL INTERFACE CONNECTING BLOCK
FIG. 2

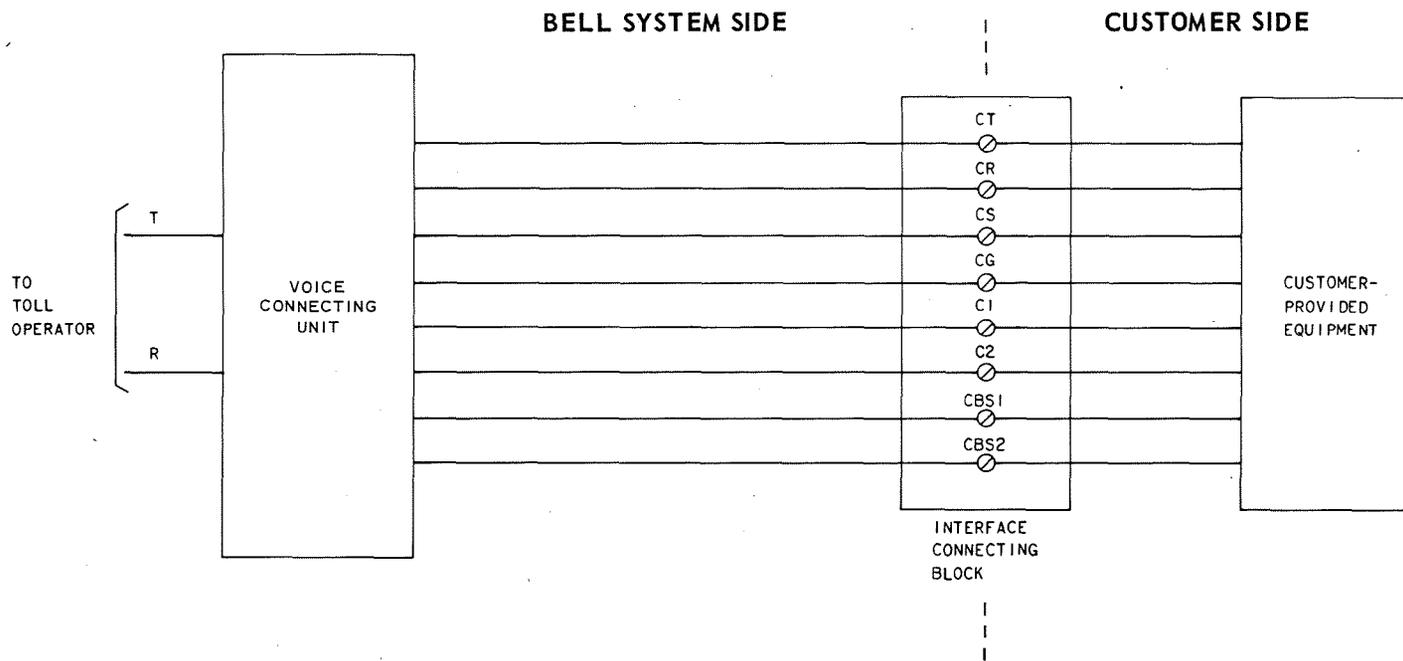

BLOCK DIAGRAM – VOICE CONNECTING ARRANGEMENT CED
 FIG. 3

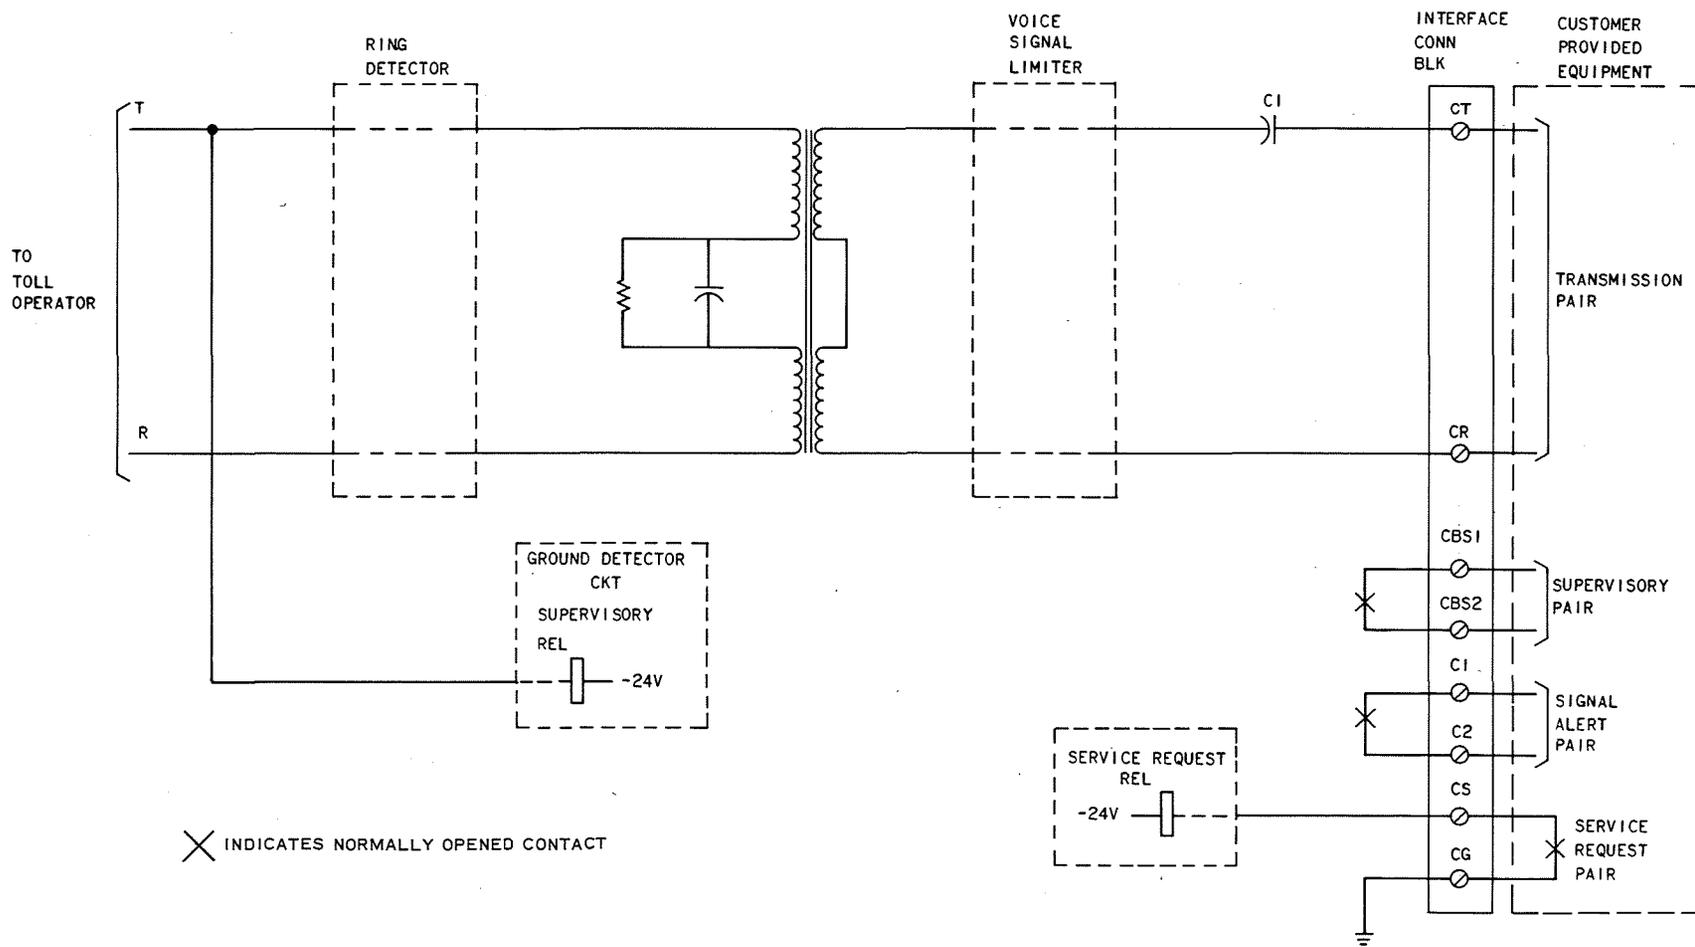

SIMPLIFIED SCHEMATIC - VOICE CONNECTING ARRANGEMENT CED
FIG. 4