


SERVICE

211 HAND TELEPHONE SETS

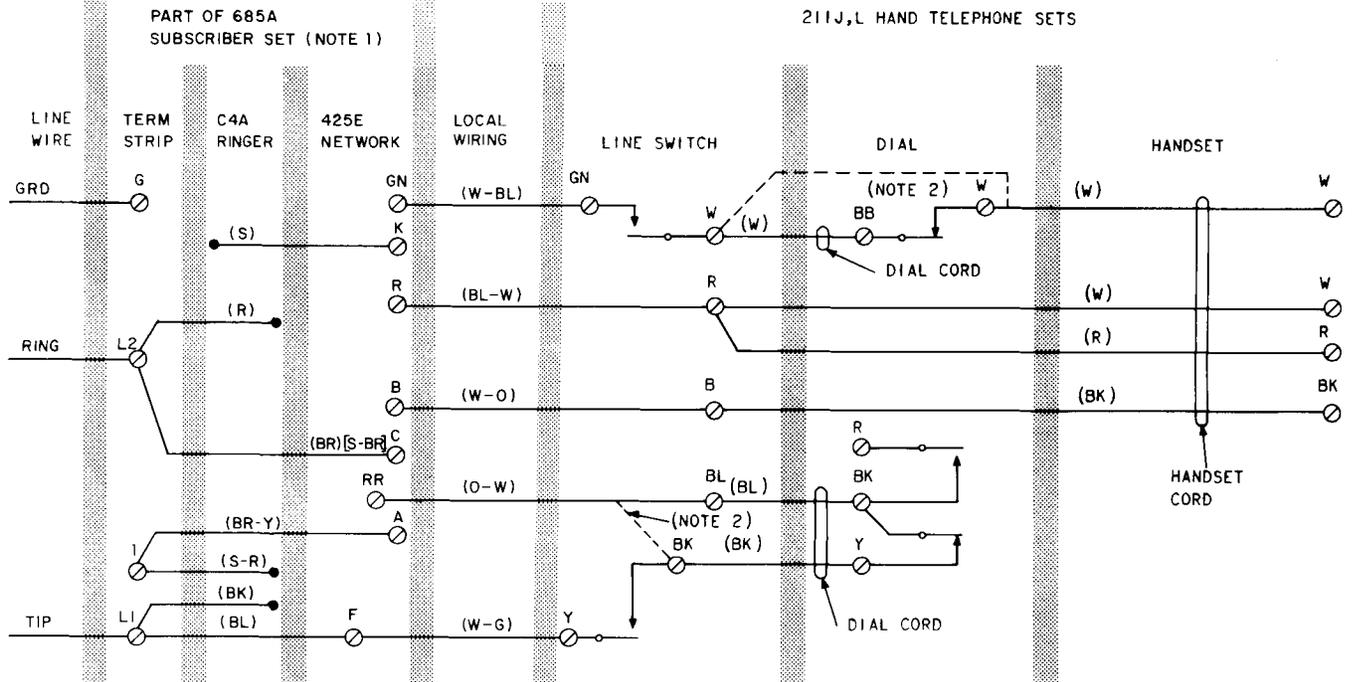

- NOTES:
1. WIRED FOR BRIDGED SERVICES WITH 685A SUBSET. REFER TO TABLE A FOR ALL OTHER SERVICES.
 2. DOTTED LINES SHOW MANUAL SET CONNECTIONS.

Fig. 1—211J or L Hand Telephone Set Connections Used With 685A Subscriber Set

TABLE A

**LINE AND RINGER CONNECTIONS
685A OR 686A SUBSET USED WITH
211J, L, N, OR P HAND TELEPHONE SETS**

| WIRE OR LEAD | | INDIVIDUAL OR BRIDGED | RING PARTY (NOTE) | NEGATIVE | POSITIVE |
|------------------------------------------|-------|-----------------------|-------------------|-----------------------|----------|
| | | | | RING STATION (NOTE 1) | |
| | | | | 1 AND 5 | 3 AND 6 |
| Ringer Leads (Note 2) | (R) | L2 | L2 | G | L2 |
| | (BK) | L1 | G | G | L2 |
| | (S) | K* | K* | A* | A* |
| | (S-R) | 1 | 1 | K* | K* |
| 426A Tube Leads (3 elements) (686A only) | (BK) | | | K* | K* |
| | (Y) | | | L2 | G |
| | (R) | | | G | L2 |
| Line Wires | RING | L2 | L2 | L2 | L2 |
| | TIP | L1 | L1 | L1 | L1 |
| | GRD | G | G | G | G |

Notes:

1. Reverse tip and ring for tip party service.
 2. To silence ringer permanently, connect (R) and (BK) ringer leads to K on the terminal strip.
- * Terminal on 425E network.

TABLE B

ASSOCIATED APPARATUS

| CLASS OF SERVICE | SUBSCRIBER SET |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|
| Individual Lines 2-Party Flat Rate 2-Party Message Rate (Ring Party Only) 4-Party Semiselective Multiparty Divided Code Regular PBX Stations 750A and 755A Keyless Stations | 685A |
| 4-Party Full Selective 8-Party Semiselective | 686A |

Note: No message rate or tip-party identification can be provided for tip-party station.

TABLE C

61M FILTER CONNECTIONS (NOTE)

| FILTER LEADS (NOTE) | FILTER LEAD TERMINATIONS | |
|---------------------|--------------------------|------------------|
| | 211J AND L | 211P |
| BK | BK of Dial | BL of Dial |
| Y | Y of Dial | G of Dial |
| R | BK of Line Switch | 1 of Line Switch |

Note: The 211-type set is arranged for, but not equipped with, a 61M filter for radio frequency suppression. When this filter is required, remove lead from G of dial and 1 of the line switch on the 211 J and L sets and Y of dial and BK of the line switch on the 211P set and connect as shown in Table C.

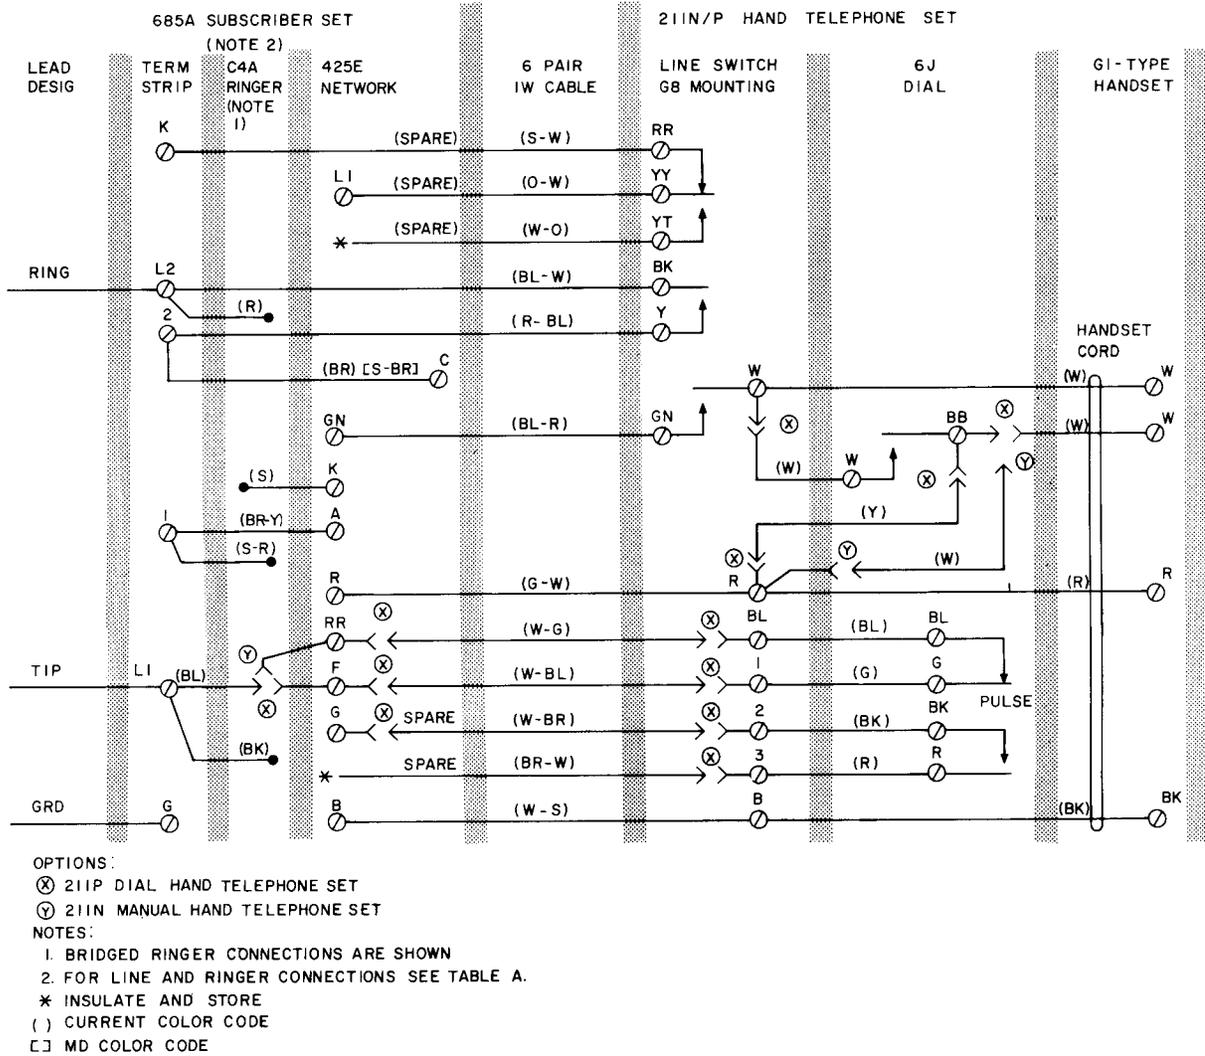


Fig. 2—211N/P Hand Telephone Set Connections Used With 685A Subscriber Set