SERVICE

511C/D TELEPHONE SETS

1. GENERAL

1.01 Reissued to add nontechnical changes to Fig. 1.

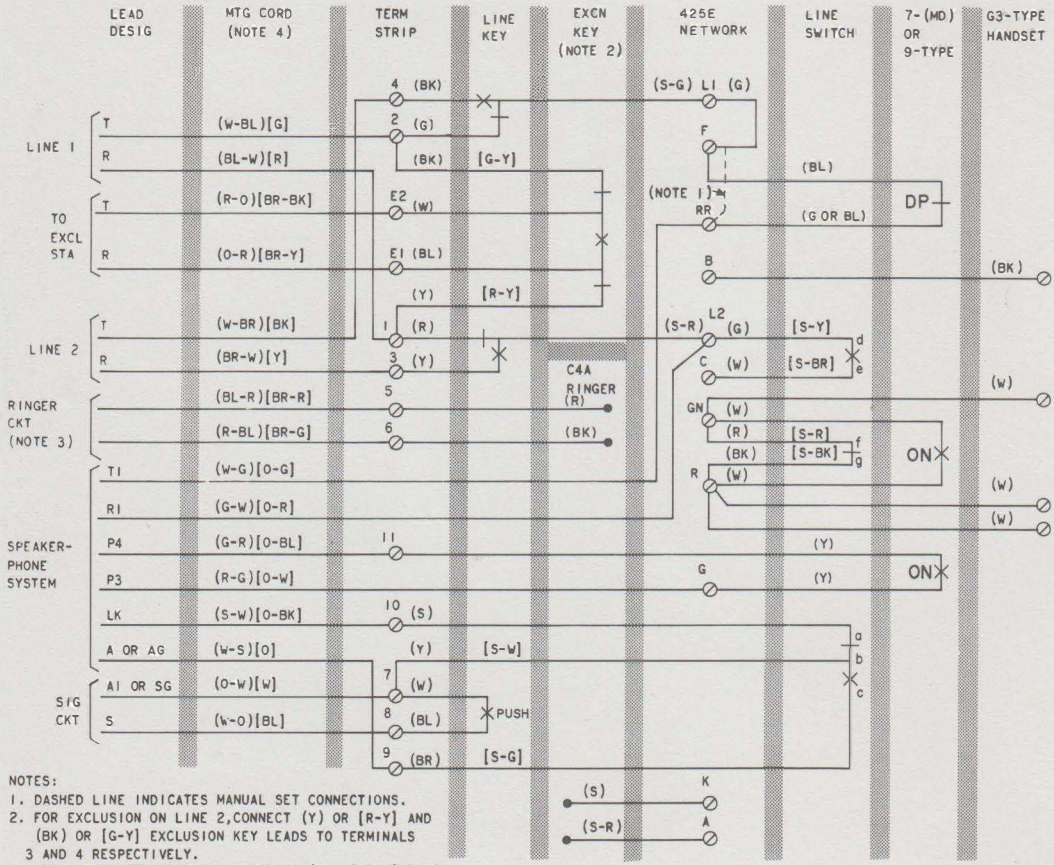

NOTES:
1. DASHED LINE INDICATES MANUAL SET CONNECTIONS.
2. FOR EXCLUSION ON LINE 2, CONNECT (Y) OR [R-Y] AND (BK) OR [G-Y] EXCLUSION KEY LEADS TO TERMINALS 3 AND 4 RESPECTIVELY.
3. FOR RINGER CONNECTIONS TERMINATE (BL-R) OR [BR-R] AND (R-BL) OR [BR-G] MOUNTING CORD LEADS TO LINE 1 OR 2 AT CONNECTION BLOCK.
4. EARLY MODEL SETS ARE EQUIPPED WITH D16D (MD) MOUNTING CORD AND CURRENT MODEL WITH D16F MOUNTING CORD.

( ) CURRENT COLOR CODE
[ ] MD COLOR CODE

DP - DIAL PULSE
ON - OFF NORMAL
LINE SWITCH SEQUENCE:
bc – MAKE
de – MAKE
ab – BREAK
fg – BREAK

Fig. 1—511C/D (MD) Telephone Set, Connections

© American Telephone and Telegraph Company, 1971
Printed in U.S.A.

BSP 502-531-404-i02_1971-02-01.jpg Scanned by Frank Harrell, (Cowboy Frank) Castle Rock, Colorado Oct 10, 2012 13:12:27