


## SERVICE

### 558C/D TELEPHONE SETS

#### 1. GENERAL

##### 1.01 Reissued to add nontechnical changes to Fig. 1.

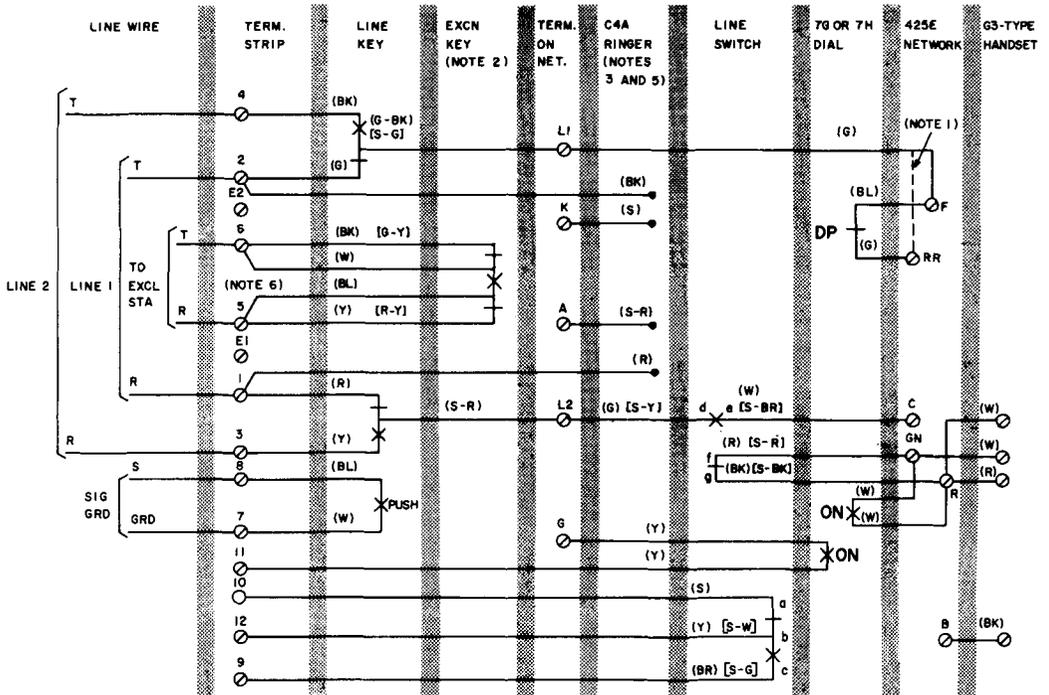

**NOTES:**

1. DASHED LINE INDICATES MANUAL SET CONNECTIONS.
2. FOR EXCLUSION ON LINE 1, CONNECT (Y)[R-Y] AND (BK)[G-Y] EXCLUSION KEY LEAD TO TERMINALS 1 AND 2 RESPECTIVELY; FOR EXCLUSION ON LINE 2, CONNECT (Y) R-Y AND (BK)[G-Y] EXCLUSION KEY LEADS TO TERMINALS 3 AND 4 RESPECTIVELY.
3. SET WIRED FOR RINGING ON LINE 1. FOR RINGING ON LINE 2 CONNECT (R) AND (BK) RINGER LEADS TO TERMINALS 3 AND 4 RESPECTIVELY.
4. A 7-TYPE BUZZER ON A 44B BRACKET MAY BE SUBSTITUTED FOR THE RINGER AS A COMMON OR PRIVATE LINE AUDIBLE SIGNAL.

5. TO SILENCE RINGER PERMANENTLY, CONNECT (BK) RINGER LEAD TO TERMINAL K ON NETWORK.
6. ON LATER MODEL SETS, CONNECTIONS TO TERMINALS 5 AND 6 HAVE BEEN TRANSPOSED.

( ) CURRENT COLOR CODES.

[ ] MD COLOR CODES.

DP - DIAL PULSE

ON - OFF NORMAL

LINE SWITCH SEQUENCE:

bc - MAKE

de - MAKE

ob - BREAK

fg - BREAK

Fig. 1—558C/D Telephone Set Connections, 2-Line Pickup, Signaling, Exclusion, and Control Leads