

# vMRF Overview

## Virtual Multimedia Resource Function

---

### Function Survey

**Copyright**

© Ericsson AB 2016, 2017. All rights reserved. No part of this document may be reproduced in any form without the written permission of the copyright owner.

**Disclaimer**

The contents of this document are subject to revision without notice due to continued progress in methodology, design and manufacturing. Ericsson shall have no liability for any error or damage of any kind resulting from the use of this document.



# Contents

<b>1</b>	<b>Function Overview</b>	<b>1</b>
1.1	vMRF Architecture	2
1.2	Virtual Machine Functions in vMRF	2
1.3	Roaming SC in vMRF	3
<b>2</b>	<b>Audio Conferencing</b>	<b>5</b>
<b>3</b>	<b>Audio Announcements</b>	<b>6</b>
<b>4</b>	<b>Detection of Dual Tone Multi Frequency (DTMF) Tones</b>	<b>7</b>
<b>5</b>	<b>Forwarding of DTMF Tones through Audio Conference</b>	<b>8</b>
<b>6</b>	<b>Playing Tones</b>	<b>9</b>
<b>7</b>	<b>Emergency and Priority Call Handling</b>	<b>10</b>
<b>8</b>	<b>Overload Protection</b>	<b>11</b>
<b>9</b>	<b>Media Stream Processing Services</b>	<b>12</b>
9.1	Adaptive Multi-Rate (AMR) Speech Coder Service	12
9.2	Adaptive Multi-Rate Wideband (AMR-WB) Speech Coder Service	12
9.3	Announcement Service	13
9.4	Audio Mixing Service	13
9.5	DTMF Receiver Service (DTMF-R)	13
9.6	DTMF Sender Service (DTMF-S)	13
9.7	G.729 Service (G.729)	14
9.8	Jitter Handling Service	14
9.9	Pulse Code Modulation Service (PCM)	14
9.10	Real-Time Transport Protocol and Real-Time Transport Control Protocol Service (RTP/RTCP)	15
9.11	Tone Sender Service	15
9.12	User Plane Frame Handler Service (UP FH)	15
	<b>Reference List</b>	<b>16</b>





# 1 Function Overview

The Virtual Multimedia Resource Function (vMRF) is used to mix and process media streams. vMRF is controlled by the Multimedia Telephony Application Server (MTAS), using H.248 control protocol. Figure 1 illustrates signaling and payload traffic related to vMRF.

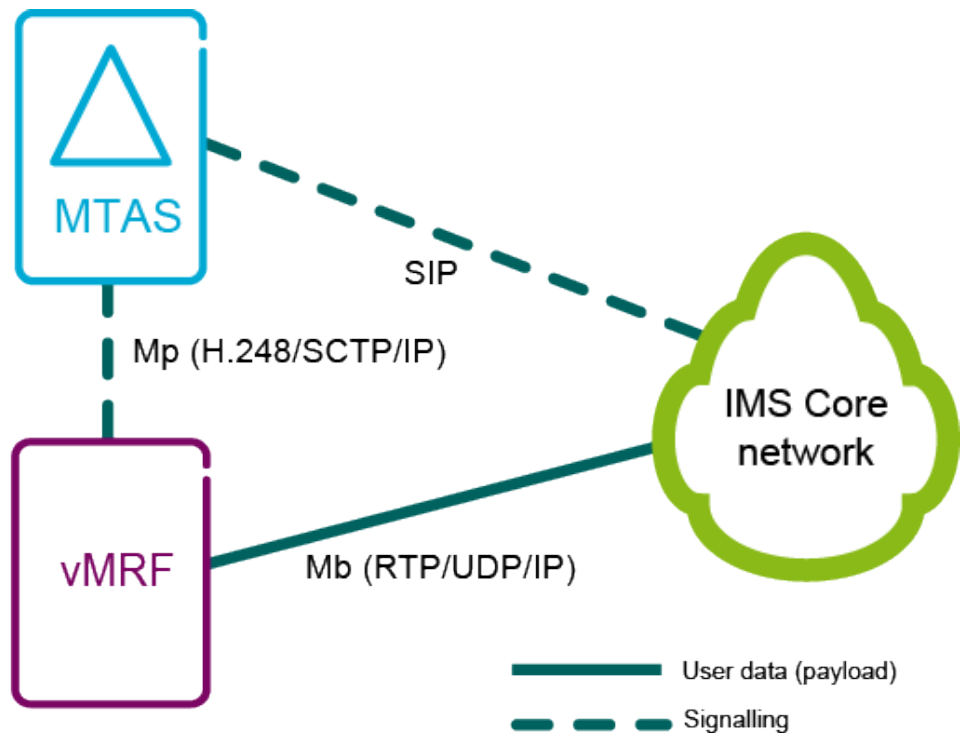


Figure 1 vMRF Overview

vMRF supports the following functions:

- Playing audio announcements
- Audio conferencing
- Detection of DTMF tones
- DTMF tone forwarding for audio conference
- Playing tones

vMRF supports the following audio codecs: AMR-NB, AMR-WB, G.711, and G.729.

## 1.1 vMRF Architecture

vMRF can contain one or more Virtualized Network Functions (VNFs). A single VNF contains multiple VMs. See [Figure 2](#) for an example overview of the vMRF with two VNFs.

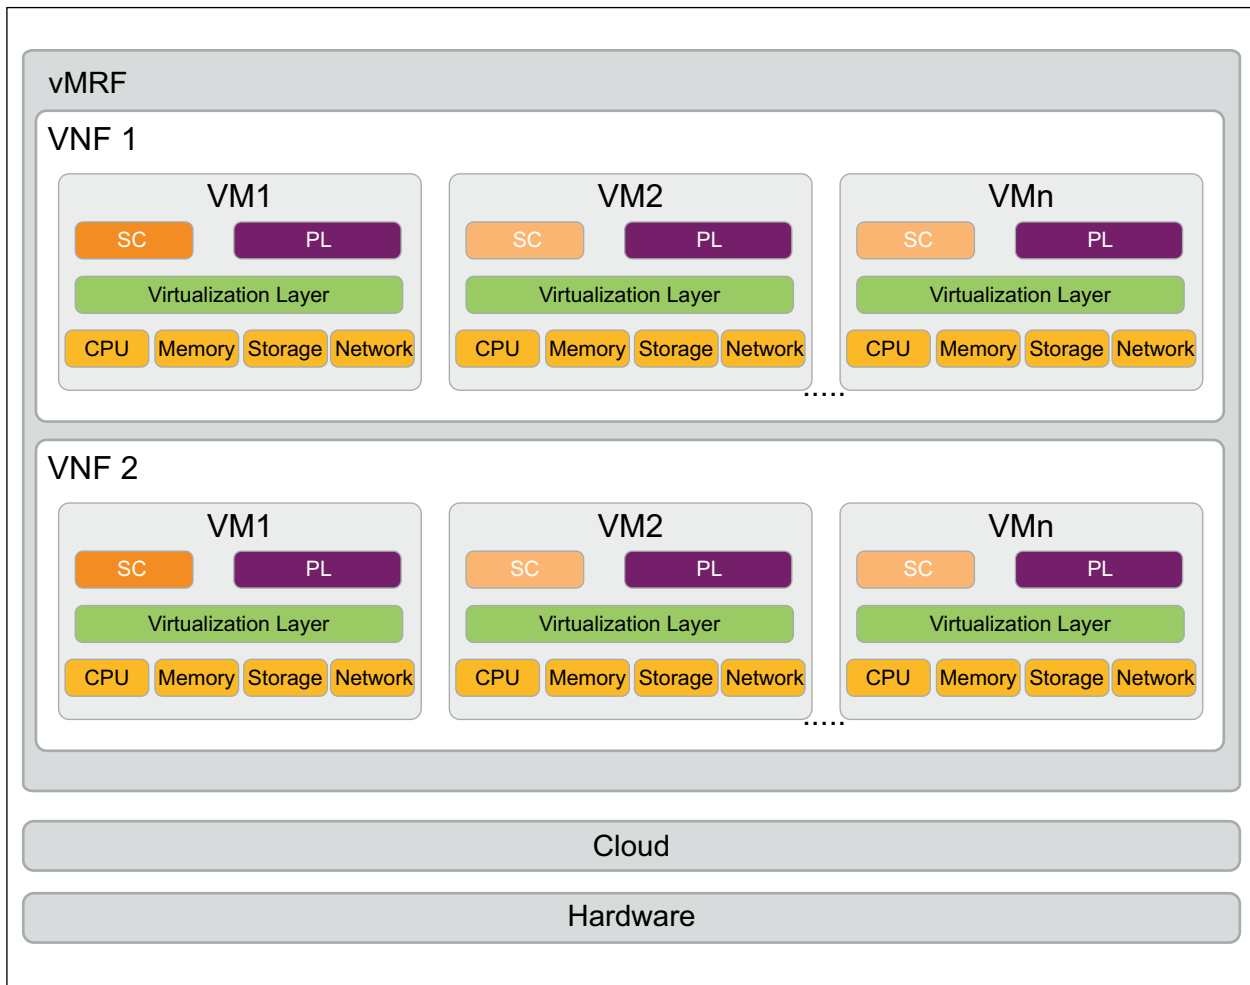


Figure 2 vMRF Architecture

## 1.2 Virtual Machine Functions in vMRF

In the vMRF VNF, each VM provides the following functions:

- **Payload (PL) function:** The PL function processes user plane traffic and H. 248 signaling traffic. Each VM in a VNF provides the same PL functionality and has the same configuration (except local IP addresses).
- **System Controller (SC) function:** The SC function processes O&M traffic and is responsible for the VNF internal clustering function that is needed for scaling out and scaling in. All VMs in the VNF can act as the SC, but the SC function is active in only one VM at a time. The active SC VM is



selected by the Roaming SC function, see [Roaming SC in vMRF](#) on page 3.

See [unresolved external reference] for an overview of the vMRF architecture.

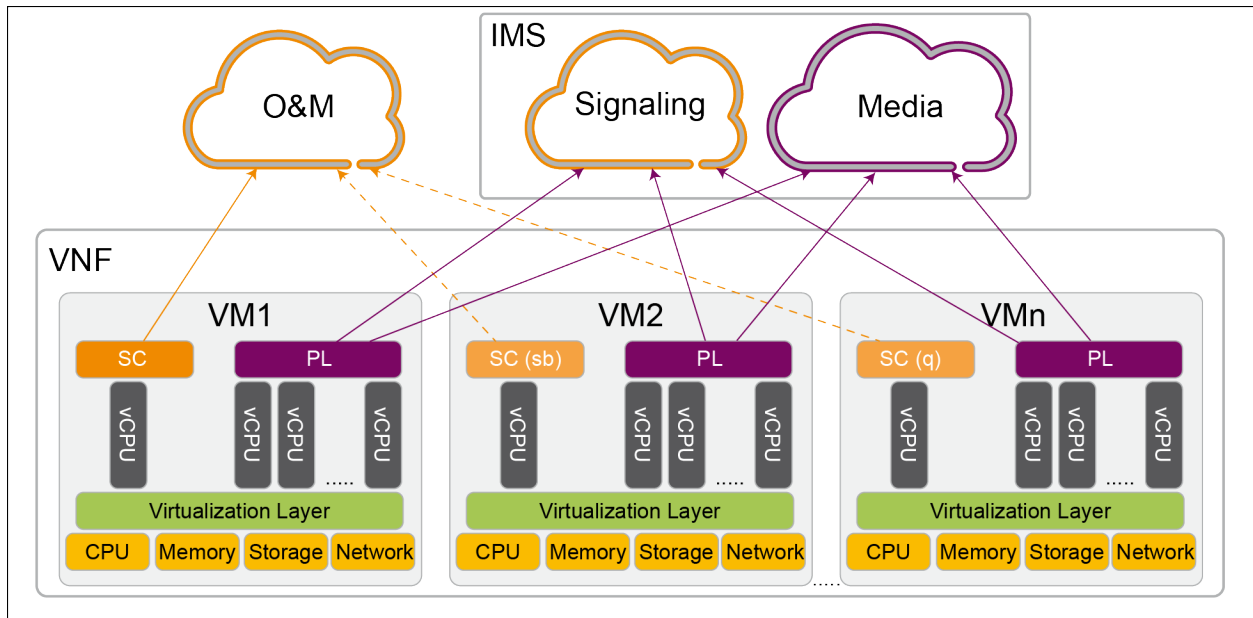


Figure 3 vMRF Architecture

## 1.3 Roaming SC in vMRF

In vMRF, O&M functions are secured with a Redundancy scheme called Roaming SC. This means that all virtual machines can process payload and also act as a system controller when necessary. If the SC fails, any virtual machine in the cluster can take over the SC role. This provides the robustness required by operating the VNF in a cloud environment. This also allows the VNF to operate autonomously, eliminating the need for manual clustering-related configuration.

With the Roaming SC scheme, all SCs have one of the following states:

- **ACTIVE:** The **ACTIVE** SC is processing O&M traffic for the VNF. The SC function runs on a separate core from the PL functions.
- **STANDBY (sb):** The **STANDBY** SC functions only as a PL VM, but it becomes the **ACTIVE** SC in case of the failure of the current **ACTIVE** SC.
- **QUIESCED (q):** All VMs that are not in **STANDBY** or **ACTIVE** SC state are in **QUIESCED** state. They function as PL VMs, and are ready to take either the **ACTIVE** or **STANDBY** SC state when needed.

The SC state is indicated in the `scState` attribute of the `MrfInstance` MO as follows:



<b>SC_ACTIVE</b>	This VM is the active SC.
<b>SC_STANDBY</b>	This VM is the standby SC.
<b>SC_QUIESCED</b>	This VM is in <code>QUIESCED</code> state.

Assignment of the different SC states is done according to the following:

- **ACTIVE:** After a cluster restart or the simultaneous failure of the `ACTIVE` and `STANDBY` SC VMs, the `ACTIVE` SC is selected with a leader election algorithm.
- **STANDBY:** When the `STANDBY` SC fails or becomes `ACTIVE`, a new `STANDBY` SC is selected randomly from the `QUIESCED` SC VMs in the VNF.
- **QUIESCED:** All SCs that are not `ACTIVE` or `STANDBY` are in `QUIESCED` state.

When a VM takes the `ACTIVE` SC role, it automatically inherits the O&M IP address of the former `ACTIVE` SC. This ensures a seamless and transparent switchover of the O&M end-point.

To prevent two SCs operating at the same time, the new SC VM starts processing O&M traffic only after a delay period: about 5 seconds after cluster startup, or 6.5 seconds after the failure of the `ACTIVE` SC VM.





## 2 Audio Conferencing

The audio conferencing feature provides a service that allows the connection of as many as 30 participants to a conference call. For each participant, it can be specified whether the connection is unidirectional (listening only) or bidirectional. The audio conferencing feature can dynamically mix audio from several participants. The audio from a participant is mixed to the audio conference based on active speaker logic.

Each client can have its own codec in use, and the Audio Conferencing feature provides transcoding between them. Audio mixing is performed at 16 kHz sampling rate. This guarantees wideband conferencing experience for wideband-capable terminals.

The following audio codecs are supported by vMRF: PCM, G.729, AMR-NB, AMR-WB.

## 3 Audio Announcements

Audio announcements feature is used to provide audio announcements and to facilitate interactive services for operators and network providers. vMRF supports audio announcements through streaming of audio content from the announcement files to subscribers. Audio announcements are supported in HD quality. The sample rate of the audio announcements is 16 kHz and the audio mode is Mono. Audio announcements have to be encoded in 16 bit 16 kHz PCM and stored in Waveform Audio File Format (WAV). vMRF plays an announcement towards a subscriber when a play request is received from the controlling node over H.248. Announcement files are stored on a storage server, and referenced by an announcement ID or variable announcement type. The recently played announcement files are cached to the local disk of a vMRF VM to support faster playing of announcements for future playing requests.

vMRF supports fixed announcements and segmented announcements. A fixed announcement consists of a single basic announcement. A segmented announcement is a compilation of individual announcements referred as announcement segments. In vMRF, an announcement segment can be a basic announcement or a stand-alone variable announcement. A basic announcement is a standalone announcement file that contains audio data of a spoken word or phrase. A variable announcement is an announcement whose spoken information heard by the user depends on input data received in a play request. vMRF supports the following variable announcement types: digits, date, time, number, and money. The variable announcement has a variable announcement logic file associated to each variable announcement type.

vMRF supports announcements with multiple languages. Multi-language announcements present the operator with an option to play announcements toward end users in their preferred language. Multi-language announcements are supported for both fixed announcements and segmented announcements. Multi-language announcements are identified by a single announcement ID or variable announcement type, and different languages are identified by using language tags. This enables playing of announcements toward end users in their preferred language, and simplifies the announcement configuration in vMRF and in the controlling node.

For configuration information on audio announcements refer to *vMRF Configuration Management*.



## 4 Detection of Dual Tone Multi Frequency (DTMF) Tones

DTMF digits can be detected either as inband signals from an audio stream or as separate telephone events. In case of a telephone event, the DTMF digits are detected from the RTP packets that use *telephone-event* payload format with dynamically established RTP payload type number. DTMF detection is done either for inband signals or for telephone event, not for both types simultaneously. If telephone event payload type has been negotiated for the audio stream, then vMRF detects DTMF telephone events, otherwise audio inband signals.

DTMF digits are specified in a dialing plan, called a digit map. The digit map resides in the vMRF and it is used to detect and report certain DTMF patterns received from the user plane. A pattern is a set of rules which express how the user is expected to dial DTMF digits, including, for example, digit names and timer values for the detection process. Up to 16 different DTMF digits can be used, corresponding to the following symbols: 0, 1, 2...9, A, B, C, D, \*, #. The digit map is preloaded dynamically for each session by the controlling node over H.248. vMRF detects as many DTMF digits as it is contained in the digit map. If all digits match, vMRF notifies the controlling node that DTMF digits were collected successfully. The notification contains the digits that were collected and number of attempts that were made to detect the digits.



## 5 Forwarding of DTMF Tones through Audio Conference

vMRF supports forwarding of DTMF digits through audio conference from one participant to all other participants.

The function supports detection of either telephone-event DTMF or audio DTMF from the participant, based on SDP negotiation. While detecting audio DTMF digits, the received audio DTMF digits are filtered out from the stream before mixing audio by the audio mixer. The detected DTMF digits are sent to all other participants either as telephone-event DTMF or audio DTMF, based on SDP negotiation with each participant. The context topology and termination stream mode information is checked and obeyed before forwarding DTMF digits from one participant to another participant. The function can be enabled by configuration.



## 6 Playing Tones

vMRF supports playing of predefined tones to the user plane based on request from the MTAS. For supported tones, see [Tone Sender Service](#) on page 15.

## 7 Emergency and Priority Call Handling

vMRF supports emergency and priority call handling for the following call types:

- Emergency calls
- Priority calls
- International Emergency Preference Scheme (IEPS) priority calls

A call is considered an emergency or priority call if it is indicated so in the call setup. Emergency and priority calls are treated the same way, and they are prioritized over non-emergency and non-priority calls in the case of high load on the vMRF.

A certain amount of processing capacity and internal resources are reserved by the vMRF for emergency and priority calls. This reserved fraction is called a priority pool. Normal calls are not allowed to use the priority pool. Emergency and priority calls are allowed to use resources outside of the priority pool.

The size of the priority pool can be configured in the vMRF. For more information on priority pool, refer to *vMRF Configuration Management*.

For emergency and priority call handling the following rules apply:

- Emergency and priority calls are never rejected because of network level admission control or high CPU load
- Emergency and priority calls can be rejected because of lack of internal resources



## 8 Overload Protection

To detect an overload situation in the network caused by high network traffic, the vMRF monitors the following functions:

- vMRF Application processor load (H.248 signaling, control of media stream processing)
- vMRF Media Stream Processing load (computationally demanding media processing, for example, transcoding)
- vMRF IP Pipeline load (simple media processing, for example, IP packet Header processing)
- vMRF IP Pipeline vSwitch load (outgoing packets are dropped if the vSwitch cannot process more packets)

In case of an overload situation, the following alarms are raised based on available processing capacity:

- When 80% of the available processing capacity is used in the vMRF functions, the *MRF Instance 80% Capacity Limit Exceeded* alarm is raised. It indicates that the vMRF is approaching an overload situation and new virtual machines must be created.
- When 100% of the available processing capacity is used in the vMRF functions, the *MRF Instance Overloaded* alarm is raised. In this case only emergency and priority calls are accepted. New virtual machines must be created to increase processing capacity. When a call is rejected because of overload, the H.248 ErrorCode 510 "Insufficient Resources" is reported.

## 9 Media Stream Processing Services

### 9.1 Adaptive Multi-Rate (AMR) Speech Coder Service

The Adaptive Multi-Rate (AMR) Speech Coder is a high-quality narrowband codec standardized by 3GPP. AMR is standardized as the mandatory speech coder for the LTE radio network; it is also used in WCDMA and GSM networks, and in Voice over IP solutions. The speech coder handles the conversion between PCM coded speech and AMR coded speech. Discontinuous Transmission (DTX) is supported in both uplink and downlink. DTX allows the radio transmitter to be switched off most of the time during speech pauses. This saves power in the UE and reduces interference over the air interface.

The AMR speech coder operates in different modes, representing source rates from 4.75 kbps to 12.2 kbps. The selected rate is a trade-off between speech quality and robustness. AMR complies with [3GPP TS 26.071](#).

### 9.2 Adaptive Multi-Rate Wideband (AMR-WB) Speech Coder Service

The Adaptive Multi-Rate Wideband (AMR-WB) codec is used to provide better speech quality than the existing Adaptive Multi-Rate Narrowband codec. AMR-WB provides better speech quality because its analog spectrum range is 100–7000 Hz instead of the 300–3400 Hz of narrowband codecs. The sampling rate for AMR-WB is 16 kHz instead of the 8 kHz of narrowband codecs. The prerequisite for better speech quality is that the speech is carried end-to-end in AMR-WB coded form between the two UEs. HD speech quality is lost if AMR-WB speech is converted to a narrowband codec. This is the case, for example, in calls between an AMR-WB mobile and a PSTN phone.

The AMR-WB speech codec consists of the following components:

- Multi-rate speech codec
- Source-controlled rate scheme, including voice activity detector
- Comfort noise generation system
- Error concealment mechanism (to combat the effects of transmission errors and lost packets)

The AMR-WB codec has the following nine source rates: 6.60, 8.85, 12.65, 14.25, 15.85, 18.25, 19.85, 23.05, and 23.85. These AMR-WB rates correspond to SDP mode-set values from 0 to 8 (no mode-set on SDP means





the same as all rates supported). The codec is able to switch its bit rate every 20 ms. Refer to [3GPP TS 26.171](#).

## 9.3 Announcement Service

The Announcement Service plays an announcement towards a subscriber. The announcement is read from the announcement cache, where the announcement was fetched from the announcement storage when a play request was received. The Announcement Service supports playing of announcements that are encoded in 16 bit 16 kHz PCM and stored in Waveform Audio File Format (WAV).

## 9.4 Audio Mixing Service

The Audio Mixing service is responsible for audio mixing during audio conference.

The Audio Mixing service has an active speaker logic that determines which clients are included in the audio mix. This is based on voice activity detection. The detection algorithms calculate frame power, detect pitch, and estimate tonal activity to determine whether a client is speaking or not. Active speaker logic also ensures that the client has a long enough speech period before it is included in the audio mix, and a hangover period before the included client is dropped from the audio mix.

Audio mixing is performed at 16 kHz sampling rate.

## 9.5 DTMF Receiver Service (DTMF-R)

The DTMF-R detects DTMF digits from the user plane. Both Audio DTMF and Telephone-Event DTMF are supported. The DTMF-R can detect up to 16 different DTMF digits, corresponding to 0–9, A, B, C, D, \*, and #.

For Audio DTMF, the DTMF-R detects each signaling tone, validating a correct tone pair and checking the timing. In the presence of speech, additional tests are performed to avoid interpreting a speech waveform as a valid signal tone. DTMF-R can be configured to detect overdriven DTMF tones. Without this setting, these tones would be dropped, because the harmonics produced by the low-frequency DTMF tones that fall within the passband of the high-frequency DTMF tones can be considered an indication of speech. For Telephone-Event DTMF, the digits are interpreted from RTP packets according to [RFC 4733](#).

## 9.6 DTMF Sender Service (DTMF-S)

The DTMF Sender (DTMF-S) sends DTMF digits to the user plane.

Both Audio DTMF and Telephone-Event DTMF are supported.

The DTMF-S can generate up to 16 different DTMF signals, corresponding to 0–9, A, B, C, D, \*, and #. Audio DTMF consists of two simultaneously played frequencies. Telephone-Event DTMF is encoded to RTP according to [RFC 4733](#).

## 9.7 G.729 Service (G.729)

The G.729 high compression codec enables packet voice transmission using G.729 towards external IP-based networks. vMRF supports the G.729 speech codec according to [ITU-T G.729](#), with the following variants:

- G.729A, reduced complexity 8 kbps Conjugate Structure Algebraic Code Excited Linear Prediction (CS-ACELP)
- G.729AB, meaning G.729A with built-in silence suppression

vMRF supports G.729A with packet loss concealment. A packet loss concealment mechanism is supported in order to minimize the distortion in output speech caused by lost or excessively late speech packets. The G.729A is bit stream interoperable with the full version of G.729.

vMRF supports G.729AB, which adds on silence suppression including voice activity detection, generation and reception of SID (Silence Insertion Descriptor) packets, as well as comfort noise generation. These algorithms are used to reduce the transmission rate during silence periods of speech. The G.729AB (defining reduced complexity version of the G.729 speech codec with built-in silence suppression) is bit stream interoperable with the full version of G.729 with silence suppression.

## 9.8 Jitter Handling Service

Jitter (delay variation between data packets) is removed or decreased using jitter compensation performed by the Jitter Handling service. The Jitter Handling service supports static jitter service.

In the static jitter service, the jitter buffer size is always the configured initial jitter buffer size.

## 9.9 Pulse Code Modulation Service (PCM)

The Pulse Code Modulation (PCM) service handles coding and decoding of PCM ([ITU-T G.711](#)) samples in vMRF. Both A-law and  $\mu$ -law formats are supported.



## 9.10 Real-Time Transport Protocol and Real-Time Transport Control Protocol Service (RTP/RTCP)

The RTP/RTCP service represents the RTP and RTCP protocol termination for IP user plane traffic.

RTCP can be used to monitor the aliveness of the session as well as quality of service during an ongoing RTP session, according to [RFC 3550](#).

## 9.11 Tone Sender Service

The Tone Sender service supports the generation of the following tones:

- H.248.1 E.7 Call Progress Tone Generator Package
  - Special Information Tone
  - Ringing Tone
- H.248.27 Conferencing Tones Generation Package
  - Conference Enter Tone
  - Conference Exit Tone

The tone can be added on top of an established connection or it can temporarily interrupt the speech.

## 9.12 User Plane Frame Handler Service (UP FH)

The User Plane Frame Handler (UP FH) service provides RTP payload framing according to the corresponding RTP profile.



## Reference List

- [1] *RTP Payload for DTMF Digits, Telephony Tones, and Telephony Signals*, [IETF RFC 4733](#)
- [2] *RTP: A Transport Protocol for Real-Time Applications*, [IETF RFC 3550](#)
- [3] *G.729: Coding of speech at 8 kbit/s using conjugate-structure algebraic-code-excited linear prediction (CS-ACELP)*, [ITU-T G.729](#)
- [4] *G.711: Pulse code modulation (PCM) of voice frequencies*, [ITU-T G.711](#)