

SERVICE

2751C AND D TELEPHONE SETS

1. GENERAL

1.01 These telephone sets can be used behind PBX and 1A1 or 1A2 KTS. *These sets are no longer intended for residential use.*

1.02 Reissued to:

- Indicate that these sets are not intended for residential use.
- Add 819041971 (P-90D197) guard assembly, Table A.
- Show 3A cord reel MD
- Revise Fig. 1.



The 3A (MD) cord reel shall be used when the telephone set is subjected to temperatures below 40 degrees F. The 3B cord reel shall be used when the telephone set is not subjected to temperatures below 40 degrees F.

◆ TABLE A ◆

POLARITY GUARD CONNECTIONS
(NOTES 1 AND 2)

LEAD	COLOR	FROM REMOVE	CONNECT TO	
		NET.	POLARITY GUARD	NET.
Dial	BK	RR	T	
Line Switch	W	C	S	
Polarity Guard	W			C
	G			RR

Notes:

- 1 - For use when specified by local instructions for end-to-end signaling installations.
- 2 - 819040601 (P-90D060) guard assembly is used with sets equipped with 4010-type networks and 819041971 (P-90D197) guard assembly is used with sets equipped with 4228-type networks.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

SECTION 502-735-401

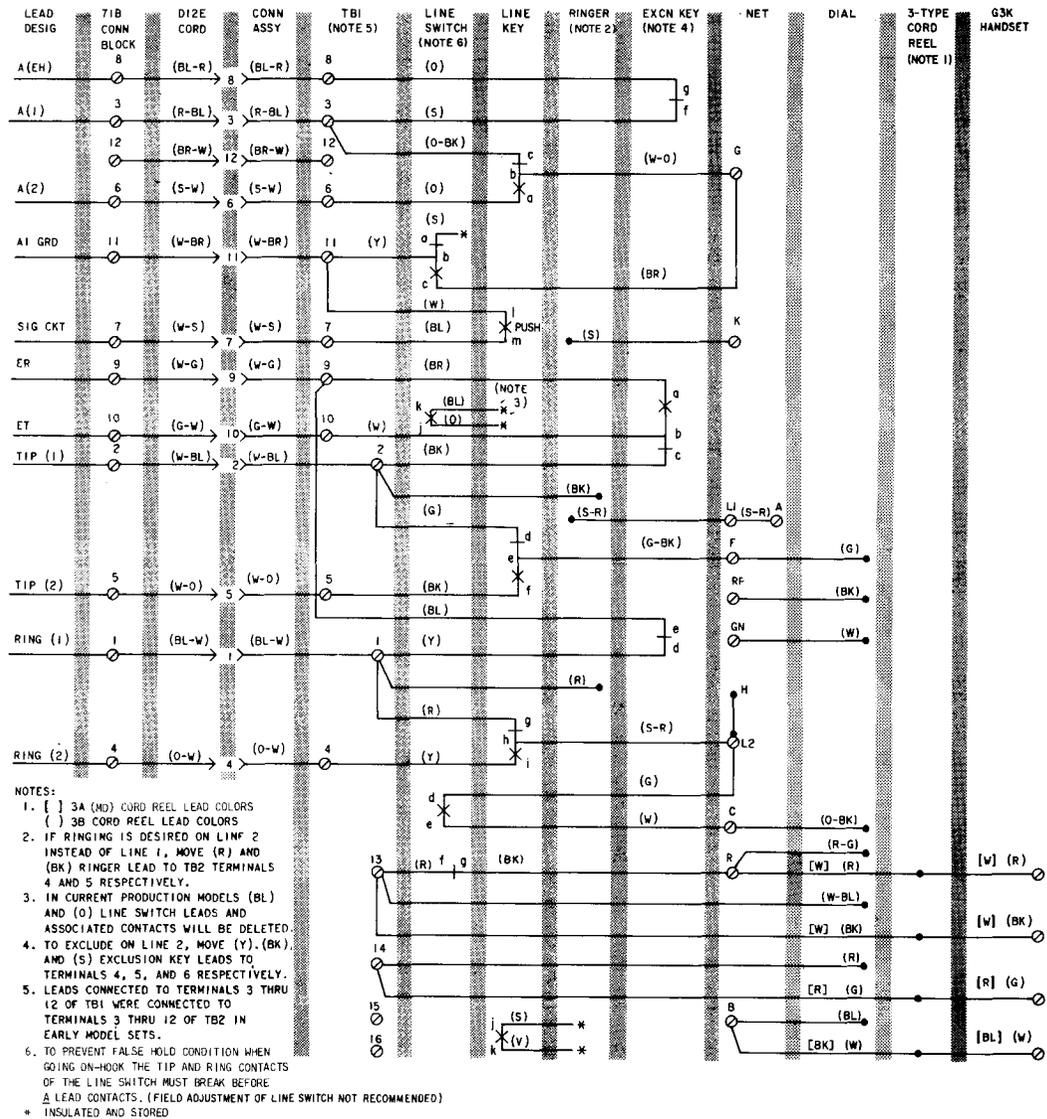


Fig. 1—2751C and D Telephone Sets, Connections