

174C, D, G, H

COMMON BATTERY — CONNECTIONS

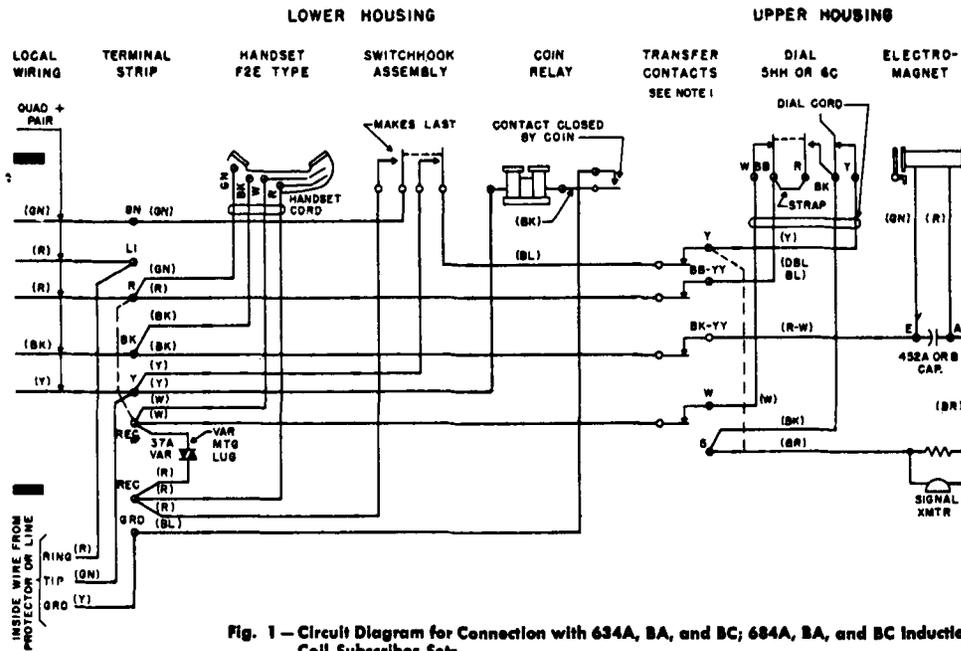


Fig. 1 — Circuit Diagram for Connection with 634A, BA, and BC; 684A, BA, and BC Induction Coil Subscriber Sets

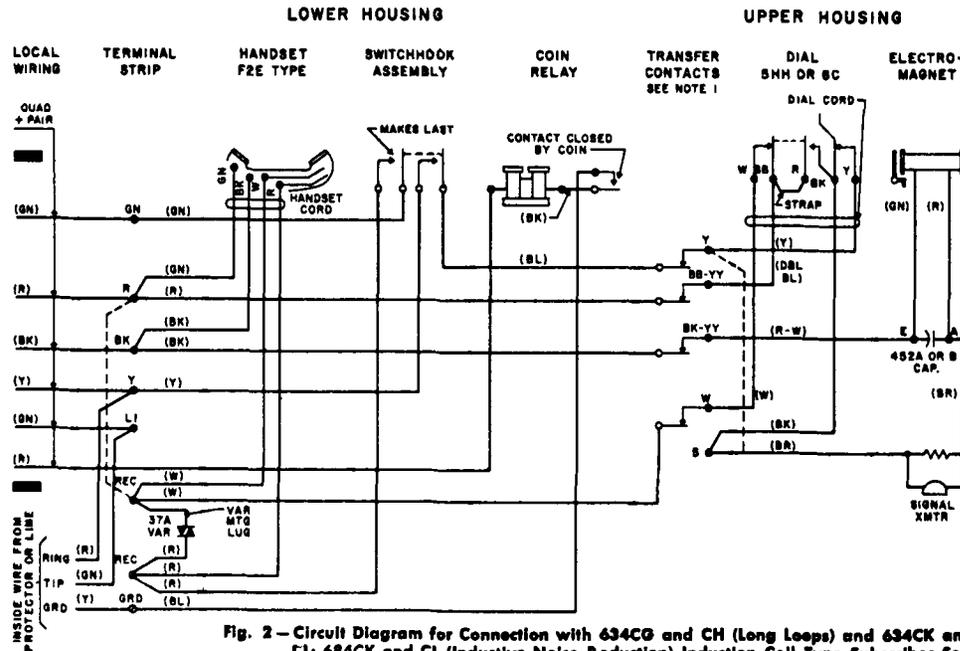


Fig. 2 — Circuit Diagram for Connection with 634CG and CH (Long Loops) and 634CK and CL; 684CK and CL (Inductive Noise Reduction) Induction Coil Type Subscriber Sets

Note 1: In some upper housings, transfer contacts may be designated Y, BB, YY, W, and BK-YY, respectively.

Note 2: Dotted lines in diagram show manual set connections.

Note 3: When a 61R filter is required for radio-frequency suppression, move yellow dial lead from Y upper housing contact spring to filter bracket terminal and connect filter leads as follows:

Yellow lead to filter bracket terminal

Black lead to No. 5 upper housing contact

Red lead to Y upper housing contact.