


## BN-1280 COIN TELEPHONE SHELF IDENTIFICATION AND INSTALLATION

### 1. GENERAL

- 1.01 This section tells about the preassembled BN-1280 Coin Telephone Shelf.
- 1.02 The BN-1280 shelf will accommodate all coin telephones except the 235- and 1235-types.

### 2. IDENTIFICATION

- 2.01 The BN-1280 Shelf is similar in appearance and application to the KS-19267 Shelf.
- 2.02 It is available in ten porcelain enamel colors and five formica wood grain finishes. (See appropriate sections of the Supplies Catalog.)
- 2.03 The writing and book shelves are stainless steel, especially designed for one-step cleaning (Fig. 1).

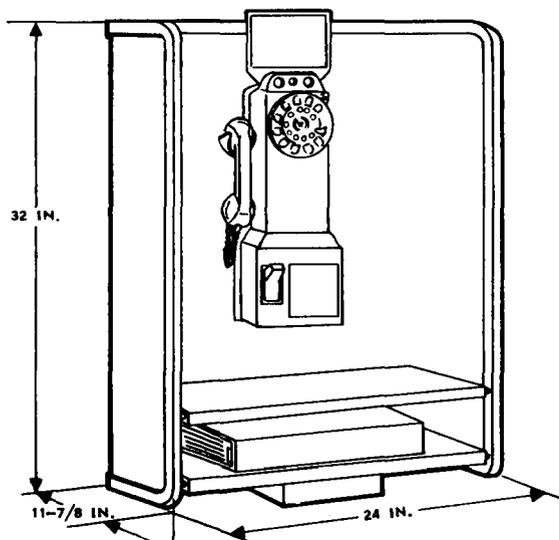

BN-1280 Coin Telephone Shelf  
Fig. 1

- 2.04 The backplate has sixteen predrilled mounting holes to match most wall stud widths.

### 3. INSTALLATION

- 3.01 Using Figs. 2 and 3 as a guide, proceed as follows:

- (1) Remove the two screws (A) which hold the wrapper assembly (B) and mounting backplate (C) together.
- (2) Mount backplate on wall using appropriate mounting holes (minimum of four).
- (3) Refer to section on installation of backboards for size and type of fasteners required on various surfaces.

(a) When the seat is furnished, mount the BN-1280 shelf and backplate 56 inches from the floor.

(b) When the seat is not furnished, mount the BN-1280 shelf and backplate 67 inches from the floor.

*Note:* Measure distance from floor to top of backplate. These heights may vary with local conditions or customer requirements.

- (4) Instrument wiring may enter through the bottom, top, or center wire holes of the backplate.

(5) Install wrapper assembly by dropping catches (E) at top and bottom into the wall mounting backplate. Pull down firmly until fully engaged.

- (6) Replace screws (A).


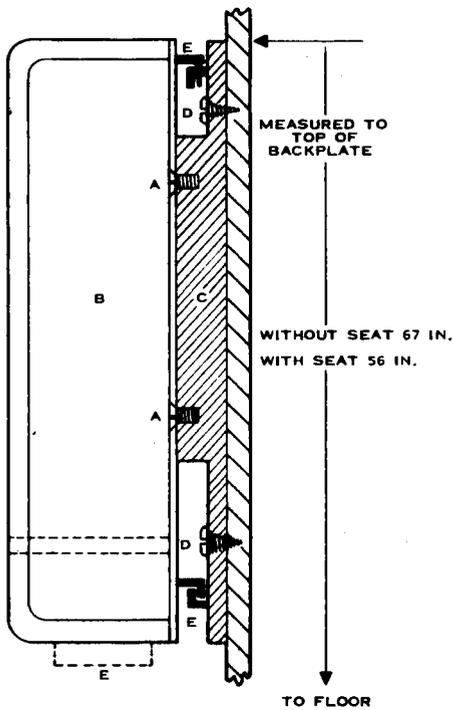


Fig. 2

3.02 For multiple installations, proceed as described in 3.01. Leave a four-inch space between shelf mountings (Fig. 4).

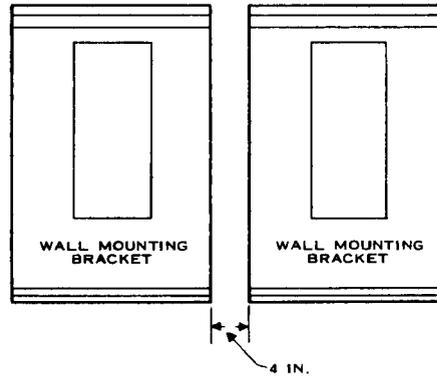


Multiple Installations  
Fig. 4

3.03 Attach coin telephone to metal backplate using P-49C296, 1/4-20 by one-inch FH machine screws.

*Note:* Backplate will accommodate security studs.

3.04 A subset may be installed beneath the shelf on a predrilled mounting bar (Fig. 1).

3.05 The shelf will accommodate the BN-1624-type Cover Guard.

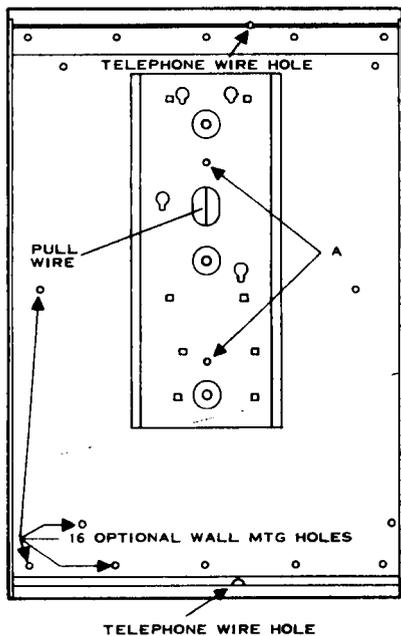

Wall Mounting Backplate  
Fig. 3

ASSEMBLY PARTS - PORCELAIN AND FORMICA					
KEY	PART NO.	DESCRIPTION	KEY	PART NO.	DESCRIPTION
A	BN 2004	WALL MOUNTING BRACKET	K	BN 2155	GASKET-PORCELAIN
B	BN 2016	TRIM-L.H.	L	BN 1969	GASKET-FORMICA
C	BN 2015	TRIM-R.H.	M	BN 2012	SHELF-TOP-STAINLESS STEEL
D	BN 2017	RINGER PLATE WITH SCREWS	N	BN 2013	SHELF-BOTTOM-STAINLESS STEEL
E	BN 2021	WRAPPER-PORCELAIN-SPECIFY COLOR	O	BN 2012-G	SHELF-TOP-FORMICA-OPTIONAL
F	BN 2018	WRAPPER-FORMICA-SPECIFY COLOR	P	BN 2013-G	SHELF-BOTTOM-FORMICA-OPTIONAL
G	BN 1110	NUT-(4) #10-24 SQ.	Q	BN 2014	SPACER-(4) 9/16"X1/2" DIAM. ALUM.
H	BN 109	SCREW-(4) 1/4"-20X1" SLOT RD. HD.	R	BN 101	SCREW-(6) #10X1 2" PHIL. BIND HD.
I	BN 359	SCREW-(4) #10-24X3/8" SLOT RD. HD.	S	BN 1396	SCREW-(10) #10X3/8" PHIL. BIND HD.
J	BN 2008	MOUNTING CLIP ASSEMBLY	T	BN 296	SCREW-(4) #7X1/2" A, SLOT BIND HD.

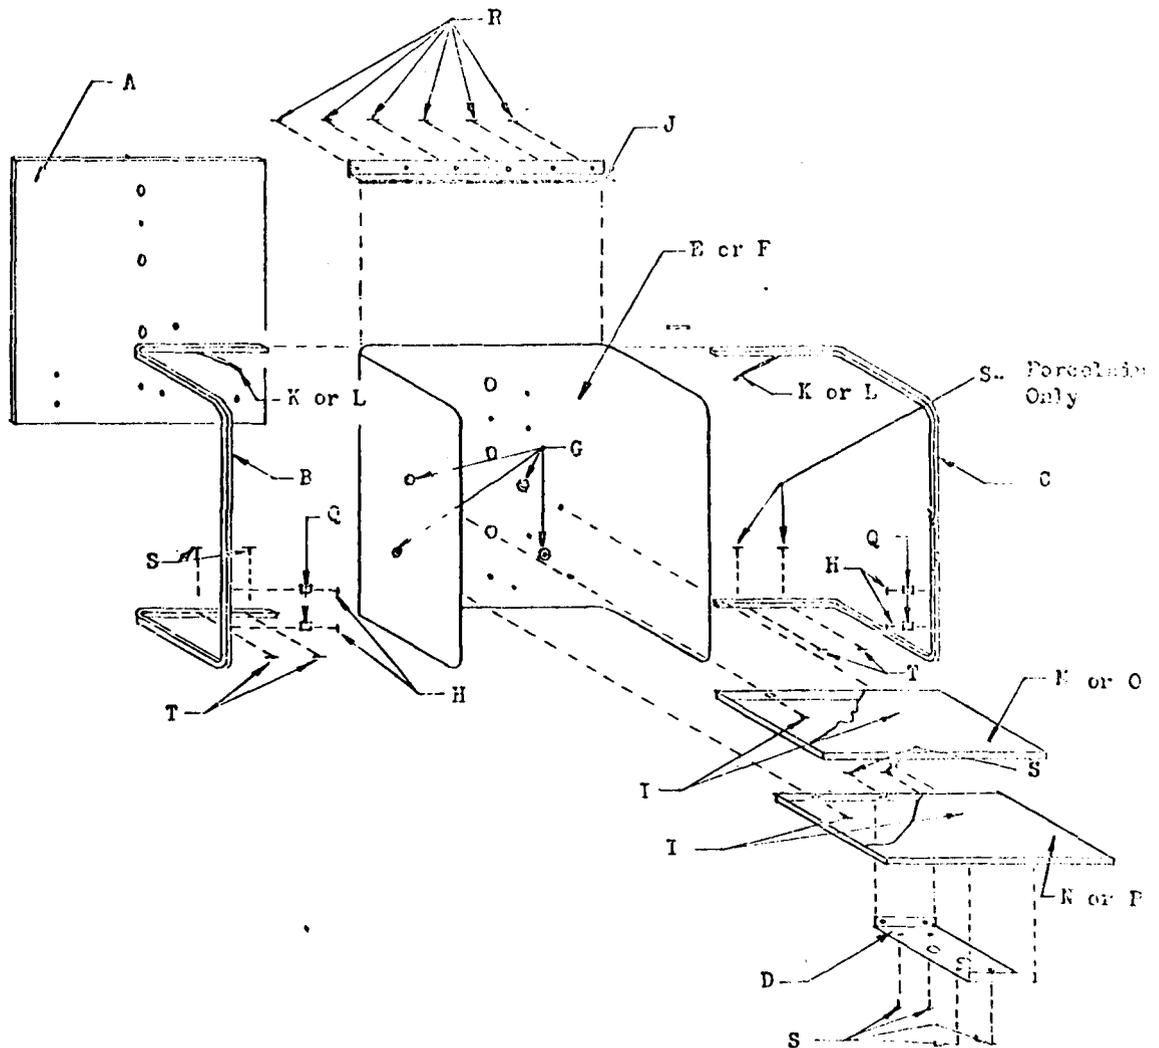


Fig. 5

OPTIONAL			EQUIPMENT		
KEY	PART NO.	LAMP FRAME ASSEMBLY	KEY	PART NO.	PEDESTAL ASSEMBLY
A	BN 2031	LAMP FRAME ASSEMBLY	A	BN 2075	PEDESTAL MOUNTING ASSEMBLY WITH (4) BOLTS 1-1/4"X1/2" DIAM. HEX HD.
B	BN 1004	SIGN			
C	BN 2387	ENDS-BOX			
D	BN 2386	NUTS-ACORN			
E	BN 1603	LAMP #F15T12 CW (SYLVANIA)			

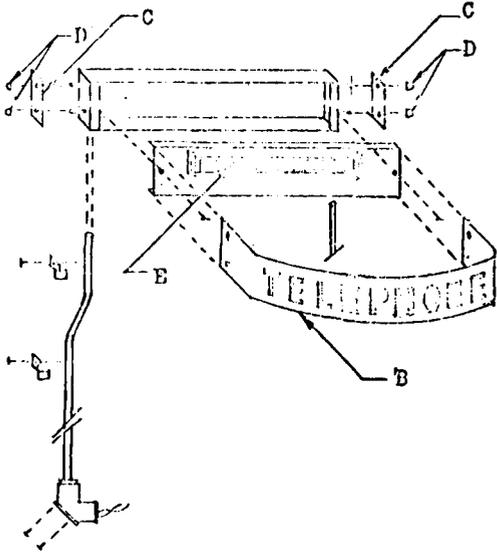


Fig. 6

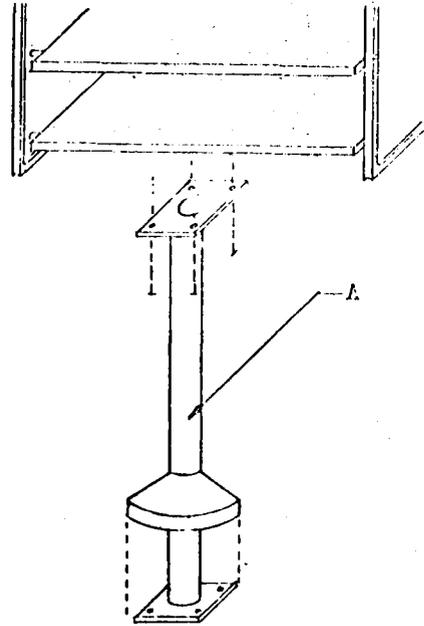


Fig. 7

KEY	PART NO.	W.E. 235G PHONE MTG. KIT
A	BN 2380	W.E. 235G ADAPTOR ASSEMBLY

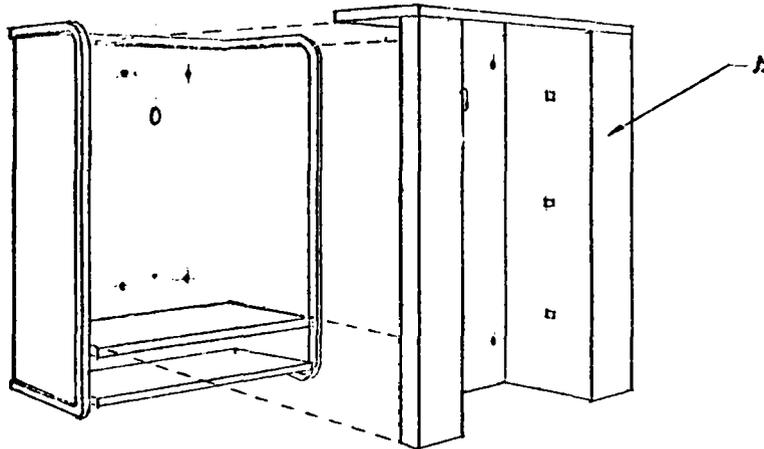


Fig. 8

NOTE: ITEMS ON THIS PAGE ARE FOR REPLACEMENT PARTS ONLY AND MUST BE ORIGINALLY ORDERED AS FACTORY INSTALLED EQUIPMENT.