

2.00 GENERAL

2.01 The line limits within which the coin features of these coin collectors will operate when used as local battery talking—common battery signaling stations are dependent upon the type and arrangement of the central office equipment to which they are connected; therefore, these coin collectors shall not be used as such stations without proper authorization.

2.02 These coin collectors may be used with the 634YD subscriber set (standard connections) or the 634YE subscriber set (long loop connections) when their use does not conflict with the requirements in 2.01.

3.00 CONNECTIONS

3.01 The circuit diagrams in this section are shown on a foldout page so that they may be associated with the circuit diagram of the appropriate subscriber set to provide complete information for the connection of station apparatus.

3.02 The designations on the transfer contact terminals in some upper housings are different from those shown herein. Corresponding terminals are as shown in Table C.

TABLE C—UPPER HOUSING

Upper Housing	Terminals				
Original	W	Y	BK-YY	BB-YY	5*
Replacement	W	Y	YY	BB	BK-YY

\*Terminal 5 is not always furnished.

3.03 The 155GL and HL coin collector is arranged for, but not equipped with, a 61R filter for radio-frequency suppression. When a filter is required, move the yellow dial lead from the Y terminal in the upper housing to the filter bracket terminal and connect the filter as shown in Fig. 5.

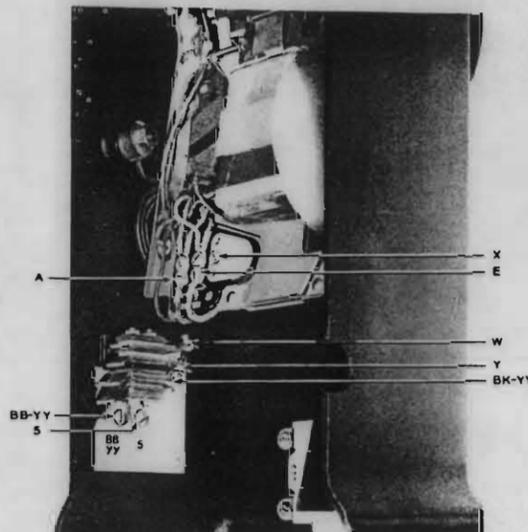


FIG. 4—UPPER HOUSING TERMINALS

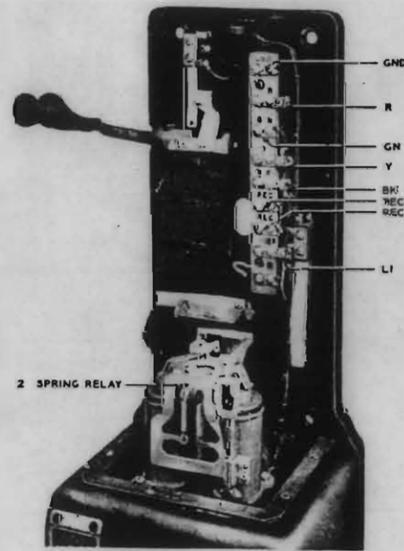


FIG. 3—LOWER HOUSING AND BACKPLATE TERMINALS



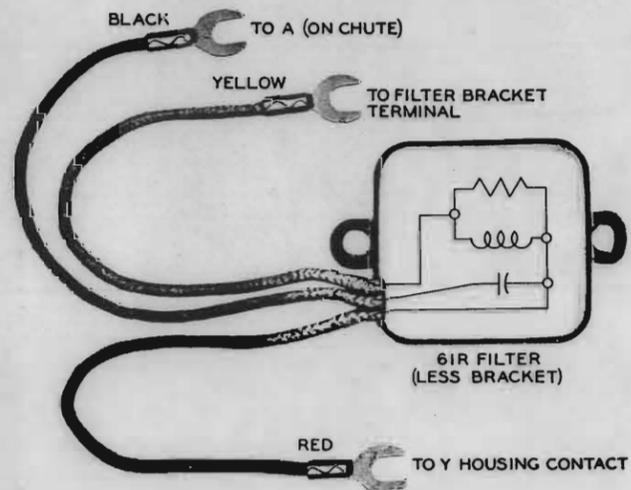


FIG. 5—61R FILTER CONNECTIONS

3.04 Circuit diagram of 155CL, DL, GL, HL coin collector when used with 634YD subscriber set.

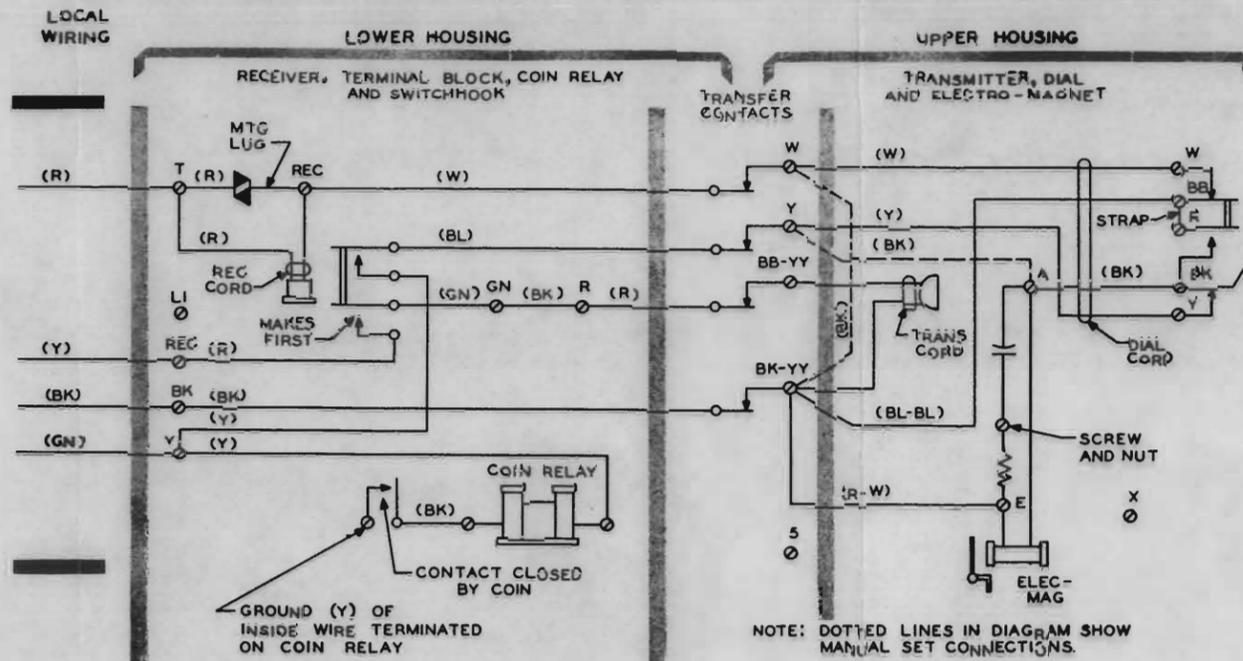

3.05 Circuit diagram of 155CL, DL, GL, HL coin collector when used with 634YE subscriber set.

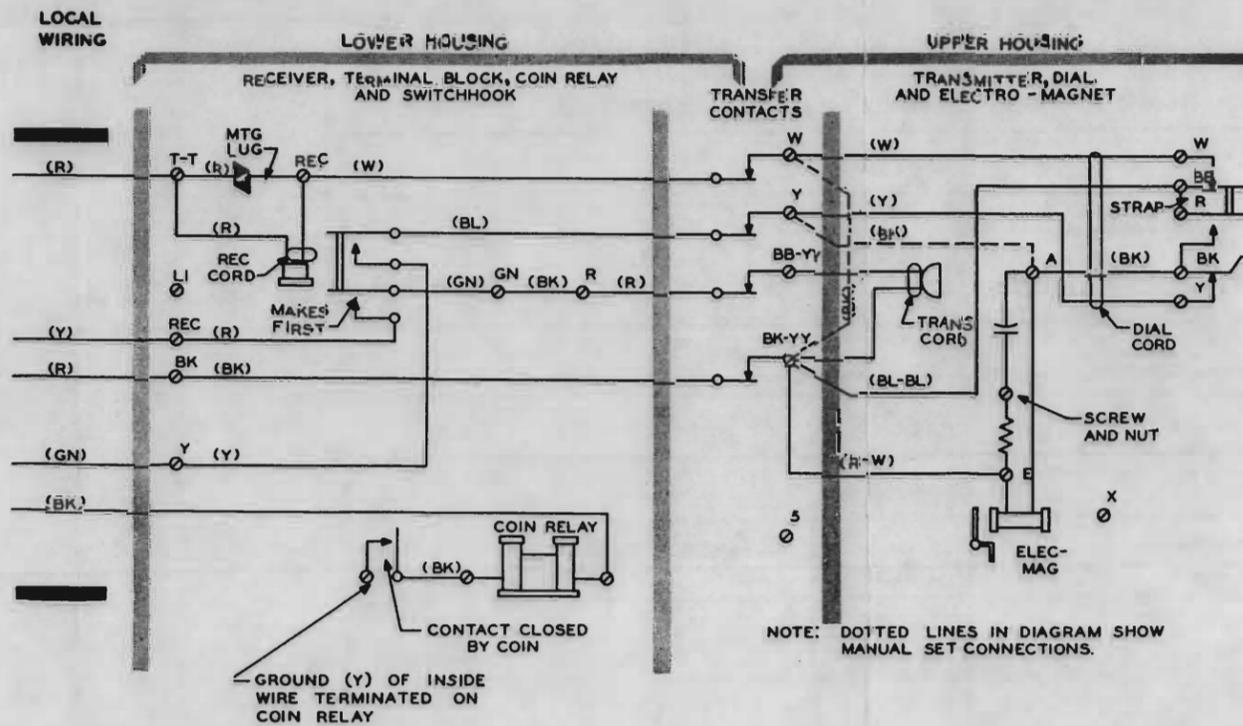

COIN COLLECTORS — PREPAY — 155CL, DL, GL, HL  
LOCAL BATTERY — CONNECTIONS

1.00 INTRODUCTION

This section covers the combination of apparatus, circuit diagrams, and connections for the 155CL, DL, GL, and HL coin collectors when used for prepay service on a 10-cent initial charge basis as local battery talking—common battery signaling stations.



FIG. 1—155CL, DL MANUAL SET



FIG. 2—155GL, HL MANUAL SET

TABLE A—COMBINATION OF APPARATUS—LOWER HOUSING AND BACKPLATE

Type Collector	Components				
	Receiver	Receiver Cord	Coin Relay	Relay Cover	Varistor
155CL, DL	706A	R2DY	P-145749	KS-7994 or P-349486	37A
155GL, HL					

TABLE B—COMBINATION OF APPARATUS—UPPER HOUSING

Type Collector	Components						
	Transmitter	Transmitter Cords	Dial	Dial Adapter	Apparatus Blank	Card Holder	Coin Chute Assembly
155CL	635A	2-T1C	—	—	50C	1B	P-339528
155DL							P-339529
155GL			5HH 6C	56A 63A	P-339528		
155HL			—	—	P-339529		

Note: Assembly P-339528 consists of a P-339526 chute, P-349093 electromagnet (nonpolarized), and 452A or B capacitor. Assembly P-339529 differs in that it is equipped with a P-339527 chute.

\*\*Reprinted to comply with modified final judgment.

Copyright © 1957 AT&T  
All Rights Reserved  
Printed in U.S.A.