

PLEASE NOTE:

2A COMMUNICATION SYSTEM

FOREMAN 02...
FOREMAN 03... (BUSINESS INTERPHONE)

1. GENERAL

1.01 This section provides the connection and maintenance information for the 2A communication systems and information on connecting the 3-type speakerphone to the 2A communication system.

1.02 This section is reissued to add:

- Information on connecting the 4-type speakerphone to the 2A communication system
- Add new Fig. 2
- Add comcode numbers.

2. CONNECTIONS

2.01 All connections are made on the four dual connecting blocks designated A-B, C-D, F-G, and H-J. Refer to Section 461-604-101 for numbering information on the 66-type connecting blocks. Refer to Section 512-620-100 for identification and connection of 3-type speakerphone and Section 512-700-100 for 4-type speakerphone.

2.02 Connection Index:

Table A—Power Connections to KSU

Table B—Station Connections for System With 2-6 Stations

Table C—Station Connections for System With 7-12 Stations

Table D—Station Connections for System With 13-18 Stations

Table E—Connections For Direct Station Selection (DSS) Using Nonlocking Keys

Table F—Modification of 253-Type KTU When Audible Signaling or DSS is Provided

Fig. 1—Block Diagram of 2A Communication System Equipped With 3-Type Speakerphone

Fig. 2—Block Diagram of 2A Communication System Equipped With 4-Type Speakerphone

Fig. 3—Connections for Audible and Visual Signaling

Fig. 4—Connecting 237B KTU Add-On Circuit to 311A16D KSU

Fig. 5—Modifications Required When Using 253B KTUs in 311A15 (MD) KSU or Adding 237B KTU Add-On Circuit

Fig. 6—Connecting 237B KTU Add-On Circuit to 311A15 (MD) KSU

Fig. 7—Modification of Existing 253A KTUs When Adding a 253B or 237B KTU to the System

Fig. 8—Changing an Assigned Station From One Conference Group to Another

Fig. 9—Connecting a Station to All Conference Groups

Fig. 10—Modification of 55-Type Control Unit When a Station is Equipped For 3-Type Speakerphone

Fig. 11—Modification of KSU to Provide TOUCH-TONE® Using 247A (MD) KTU

Fig. 12—Modification of KSU to Provide TOUCH-TONE Dialing Using 247B KTU

Fig. 13—Connections for KS-16846, List 1 External Loudspeaker

Fig. 14—D-180006 Kit of Parts, Schematic

NOTICE

Not for use or disclosure outside the Bell System except under written agreement

SECTION 512-534-400

3. MAINTENANCE

3.01 Refer to the following as an aid in locating and clearing trouble:

- CD- and SD-69480-01 (311A15 (MD) and 311A16D KSU)
- CD- and SD-69447-01)
 - 247A (MD) KTU
- Section 518-114-116)
- CD- and SD-69529-01)
 - 247B KTU
- Section 518-114-116)
- CD- and SD-69532-01 (57B Control Unit)

3.02 **Replaceable Apparatus** (refer to ordering guide in Section 512-534-100 for ordering nomenclature and color).

- 694-type subscriber set
- 66B3-50 connecting blocks
- 117A cover
- 57A control unit includes (see note):
 - ◆812459212 or◆ P-24E921 printed wiring board
 - ◆812459246 or◆ P-24E924 printed wiring board
 - ◆812459279 or◆ P-24E927 printed wiring board
- 57B control unit includes (see note):
 - ◆812853224 or◆ P-28E322 printed wiring board
 - ◆812853232 or◆ P-28E323 printed wiring board
 - ◆812853240 or◆ P-28E324 printed wiring board

◆**Note:** Printed wiring boards may be ordered on an individual basis by comcode or P-number.◆

- 207C KTU
- 252-type KTU
- 253-type KTU
- 216B KTU

- KS-16846L1 loudspeaker
- 227-type KTU
- 228A KTU
- 237B KTU
- 247A (MD) KTU includes:
 - ◆814864393 or◆ P-48F439 printed wiring board
 - ◆814864427 or◆ P-48F442 printed wiring board
 - ◆814864450 or◆ P-48F445 printed wiring board
- ◆**Note:** Printed wiring boards may be ordered on an individual basis by comcode or P-number.◆

- 228A KTU
- 247B KTU includes:
 - Y1 through Y5 circuit packs

3.03 **311A15 (MD) or 311A16D KSU:**

(a) Limit activity involving KSU to:

- Tracing wiring trouble
- Replacement of defective component KTUs

(b) Connecting block H-J provides:

- Option strapping points
- Test points for checking circuit continuity

(c) 57-type control unit:

- Operating battery is under control of the 253-type KTU over the **BAI** lead.
- Verify trouble within one of the three plug-in circuit boards by interchanging suspected board with good one.
- Replace defective board and return it for repairs.

3.04 **Station Components:**

(a) Replace defective station sets.

- (b) Check to ensure that wiring of 694-type subscriber set is properly terminated.



Reversal of M1 and M2 leads will cause low microphone output. Any deviation from proper installation rules outlined in Section 512-534-100 Part 3 (a)(1) should be reported to the immediate supervisor.

3.05 Optional KTUs Associated With KSU:

- (a) Ensure that the various optional KTUs (227-type, 228A, 237B, and 247-type) are properly positioned and terminated.
- (b) Refer to separate sections for detailed maintenance information on these units.

3.06 3-Type Speakerphone: When a station is equipped for 3-type speakerphone, modification of the 55-type control unit using D-180006 Kit of Parts is required (Fig. 10 and 14). See Section 512-620-100 for 3-type speakerphone information.

3.07 4-Type Speakerphone: D-180006 Kit of Parts is not required for 4-type speakerphone. See Section 512-700-100 for 4-type speakerphone information.

3.08 Radio Interference:

(a) Interference from commercial AM (.55 to 1.6 MHz) or FM (88 to 109 MHz) broadcast stations may be experienced when the system is installed in vicinity of a transmitting station.

- (1) Interference most frequently encountered is audible program material from station loudspeaker or handset receiver.
- (2) Extreme interference may cause paralysis of system voice switching characteristics and will result in low volume of transmission or reception.

(b) When radio interference is encountered:

(1) Replace 694A and 694B subscriber sets with a modified subscriber set designated with an asterisk after the code. Specify "Modified for Radio Suppression" when ordering a subscriber set, and the distributing house will include capacitors properly positioned in the circuitry on the printed wiring board to suppress radio interference. Subscriber set will then be coded 694A* or 694B*.

(2) Replace telephone sets equipped with 425B, E, or G networks with sets equipped with 425J networks. This is a distributing house modification. Refer to Section 500-150-100.

**TABLE A
POWER CONNECTIONS TO KSU
(NOTE)**

LEAD DESIGNATION	CONNECTING BLOCK
	TERMINAL
*A1	33E
Ground A	38D
Battery A	39D
Ground B	41D
Battery B	42D
Ground C	47D
10v ac or Battery C	50D

* Connect from associated 1A1 or 1A2 KTS

Note: Power is supplied from associated key equipment, 19- or 20-type power unit, or a 101G or equivalent power supply.

TABLE B
STATION CONNECTIONS FOR SYSTEM WITH
2-6 STATIONS

STATION CODE AND TELEPHONE NUMBER		LEAD DESIG	CONNECTING BLOCK	
			BLOCK	TERMINAL
Sta 4	Tel Set -	T	A	1C
		R		2C
		A		3C
		A1		4C
		LG		5C
		L		6C
	694-Type Subset	M2		7C
		M1		8C
		S2		9C
		S1		10C
Sta 5	Tel Set	*	A	11C-16C
	Subset			17C-20C
Sta 6	Tel Set	*	A	21C-26C
	Subset			27C-30C
Sta 7	Tel Set	*	A	31C-36C
	Subset			37C-40C
Sta 8	Tel Set	*	A	41C-46C
	Subset			47C-50C
Sta 9	Tel Set	*	B	1D-6D
	Subset			7D-10D

* 10 leads, same as Station 4

NOTE:
NOT REQUIRED FOR 311A16D KSU.

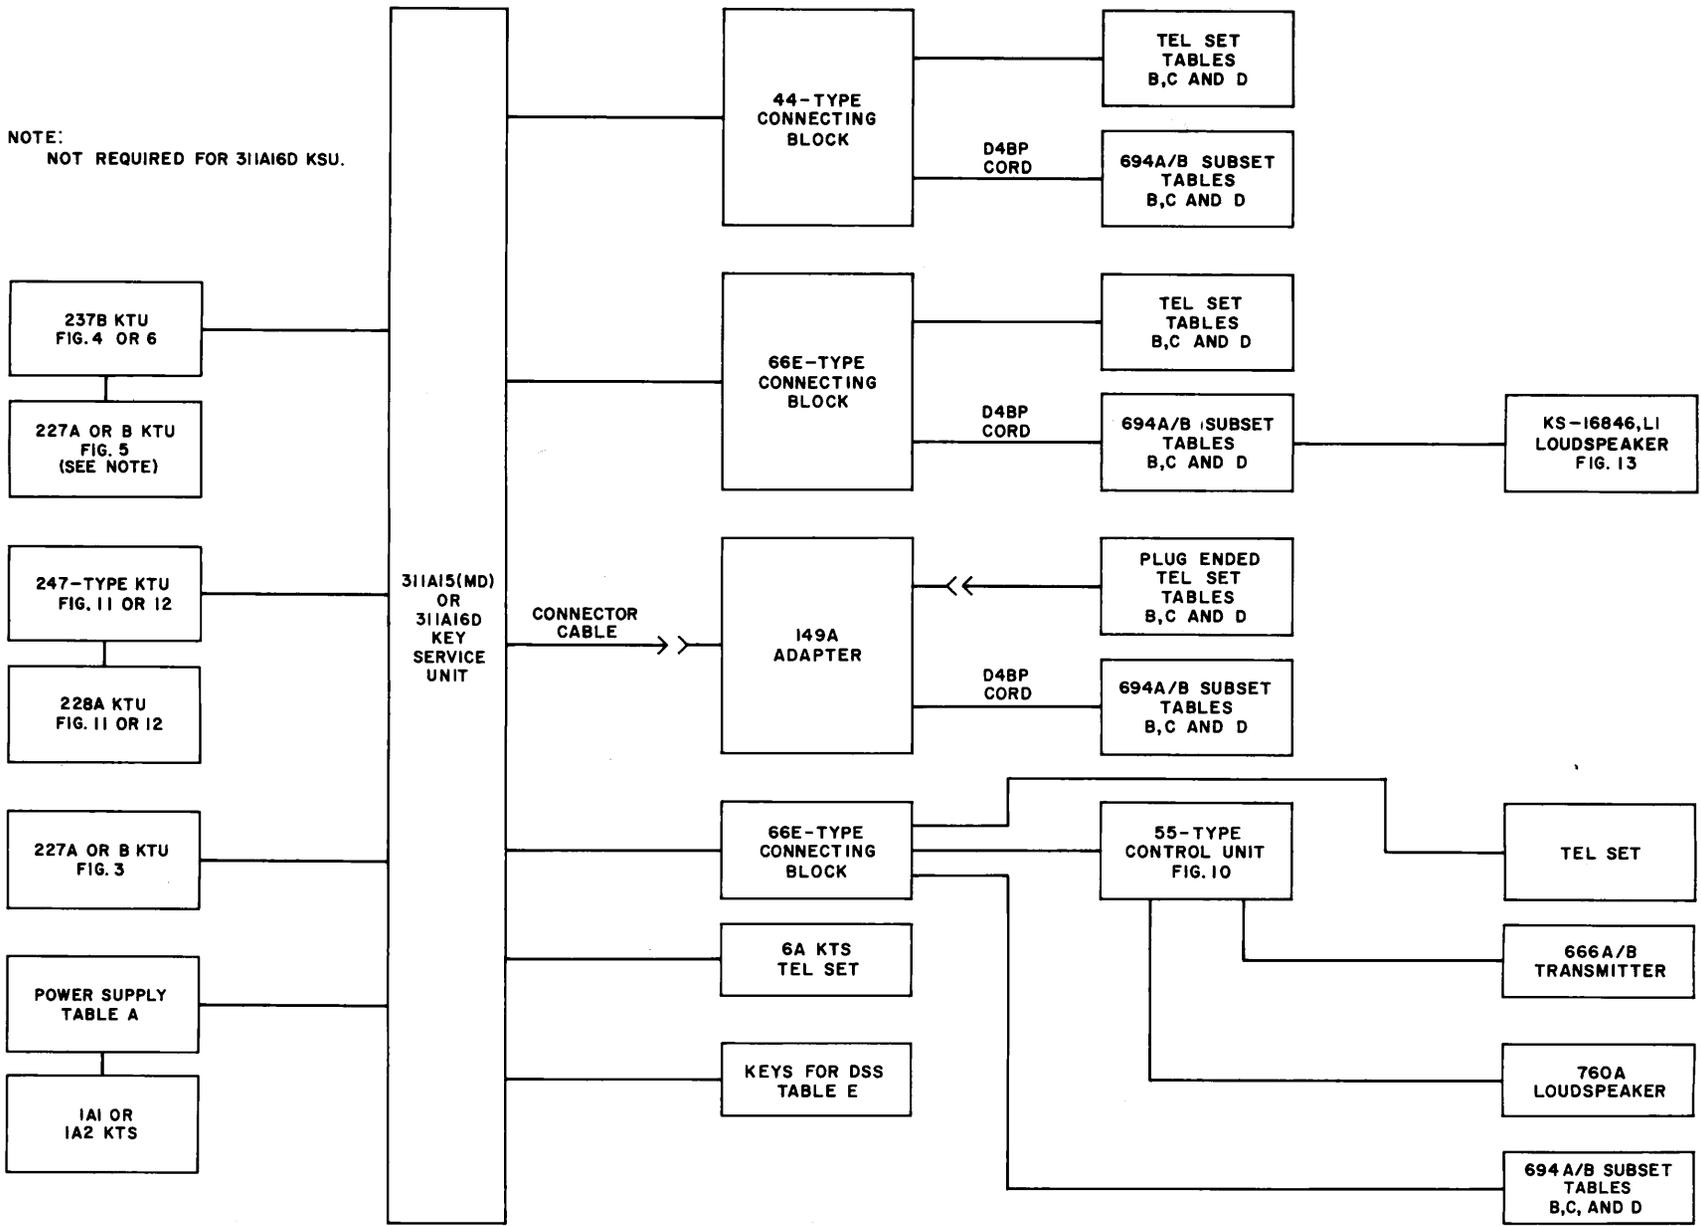


Fig. 1—Block Diagram of 2A Communication System Equipped With 3-Type Speakerphone

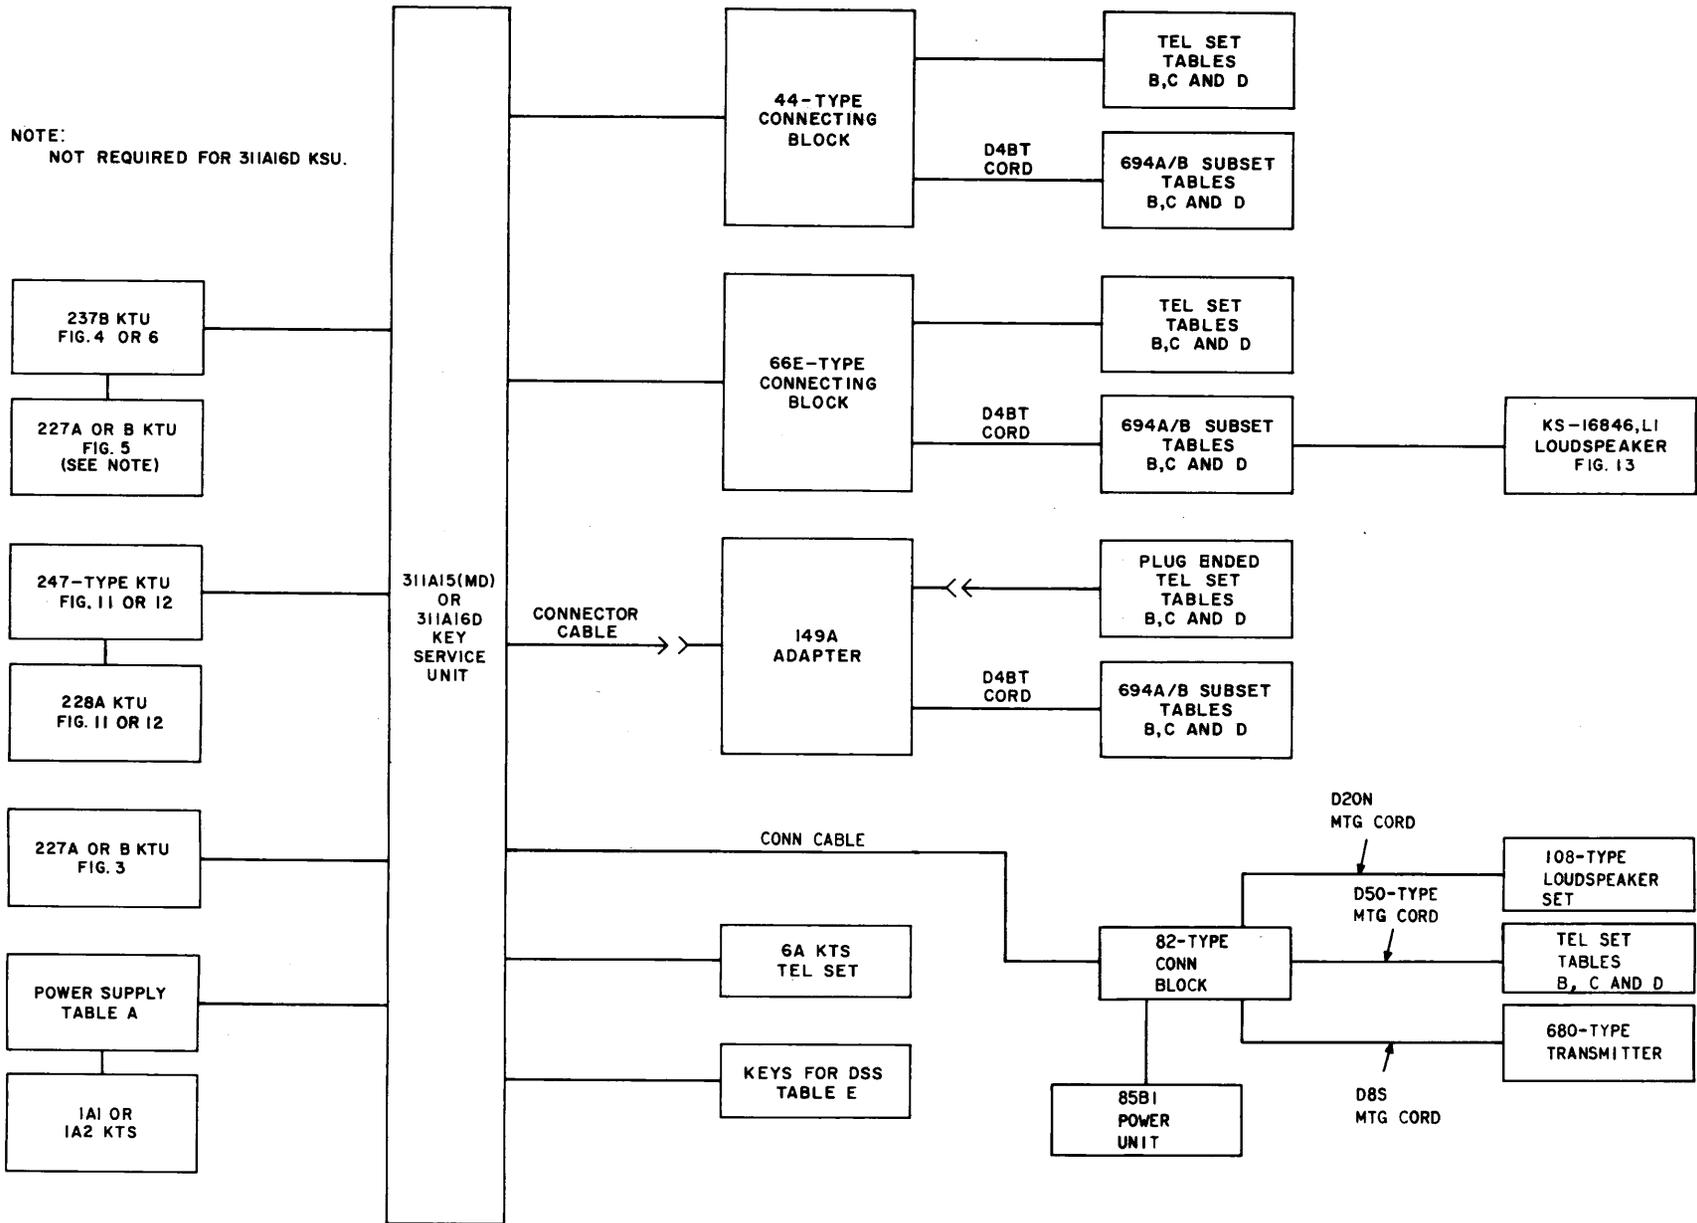






Fig. 2—Block Diagram of 2A Communication System Equipped With 4-Type Speakerphone

TABLE C
STATION CONNECTIONS FOR SYSTEM WITH 7-12 STATIONS

STATION CONNECTIONS IN ADDITION TO TABLE B				REMOVE STRAPS				
STATION CODE AND TELEPHONE NUMBER		LEAD DESIG	CONNECTING BLOCK		CONNECTING BLOCK			
								
			BLOCK	TERMINAL	BETWEEN		AND	
					BLOCK	TERMINAL	BLOCK	TERMINAL
Sta 21	Tel Set	*	C	1C-6C	H	1C	J	1D
	Subset			7C-10C		2C		2D
Sta 22	Tel Set	*	C	11C-16C		3C		3D
	Subset			17C-20C		4C		4D
Sta 23	Tel Set	*	C	21C-26C		5C		5D
	Subset			27C-30C		6C		6D
Sta 24	Tel Set	*	C	31C-36C		7C		7D
	Subset			37C-40C		8C		8D
Sta 25	Tel Set	*	C	41C-46C		9C		9D
	Subset			47C-50C		10C		10D
Sta 26	Tel Set	*	D	1D-6D	25B	H	26B	
	Subset			7D-10D	41C	42C		
				J	33D	J	34D	
					37D		38D	

* 10 leads, same as Station 4 on Table B

TABLE D
STATION CONNECTIONS FOR SYSTEM WITH 13-18 STATIONS

STATION CONNECTIONS IN ADDITION TO TABLES B AND C				STRAPS TO BE REMOVED IN ADDITION TO TABLE C						
STATION CODE AND TELEPHONE NUMBER		LEAD DESIG	CONNECTING BLOCK		CONNECTING BLOCK					
										
			BLOCK	TERMINAL	BETWEEN		AND			
					BLOCK	TERMINAL	BLOCK	TERMINAL		
Sta 27	Tel Set	*	F	1C-6C	J	42C	H	43C		
	Subset			7C-10C						
Sta 28	Tel Set	*	F	11C-16C					4F	11F
	Subset			17C-20C					5F	12F
Sta 29	Tel Set	*	F	21C-26C					6F	13F
	Subset			27C-30C					7F	14F
Sta 31	Tel Set	*	F	31C-36C					8F	15F
	Subset			37C-40C					9F	16F
Sta 32	Tel Set	*	F	41C-46C					10F	17F
	Subset			47C-50C					23E	24E
Sta 33	Tel Set	*	G	1D-6D					25E	26E
	Subset			7D-10D					34D	35D
				J					38D	

* 10 leads, same as Station 4 on Table B

SECTION 512-534-400

NOTES:

1. CONNECT TO TERMINAL ASSOCIATED WITH STATION DESIRING AUDIBLE SIGNALING.
2. REQUIRED ON 227B ONLY.
3. IN EARLIER 2A SYSTEMS, THE START LEAD IS DESIGNATED TO. CONNECT THE TO LEAD AS A START LEAD AND NOT TO A TIME-OUT CIRCUIT.

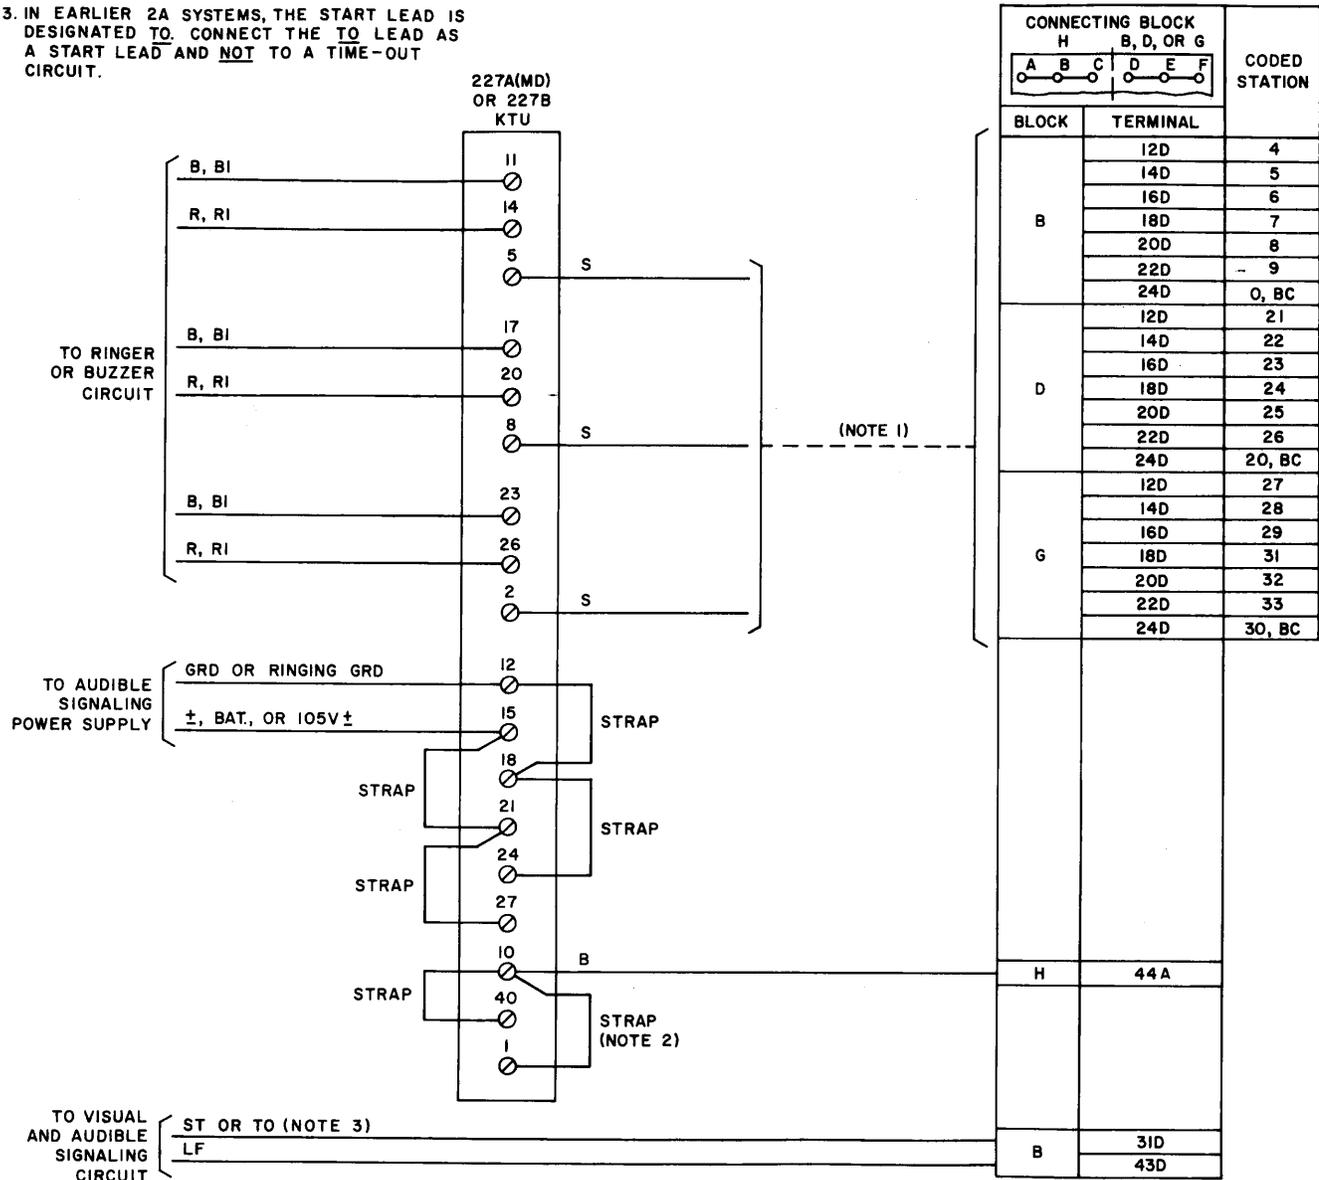


Fig. 3—Connections for Audible and Visual Signaling

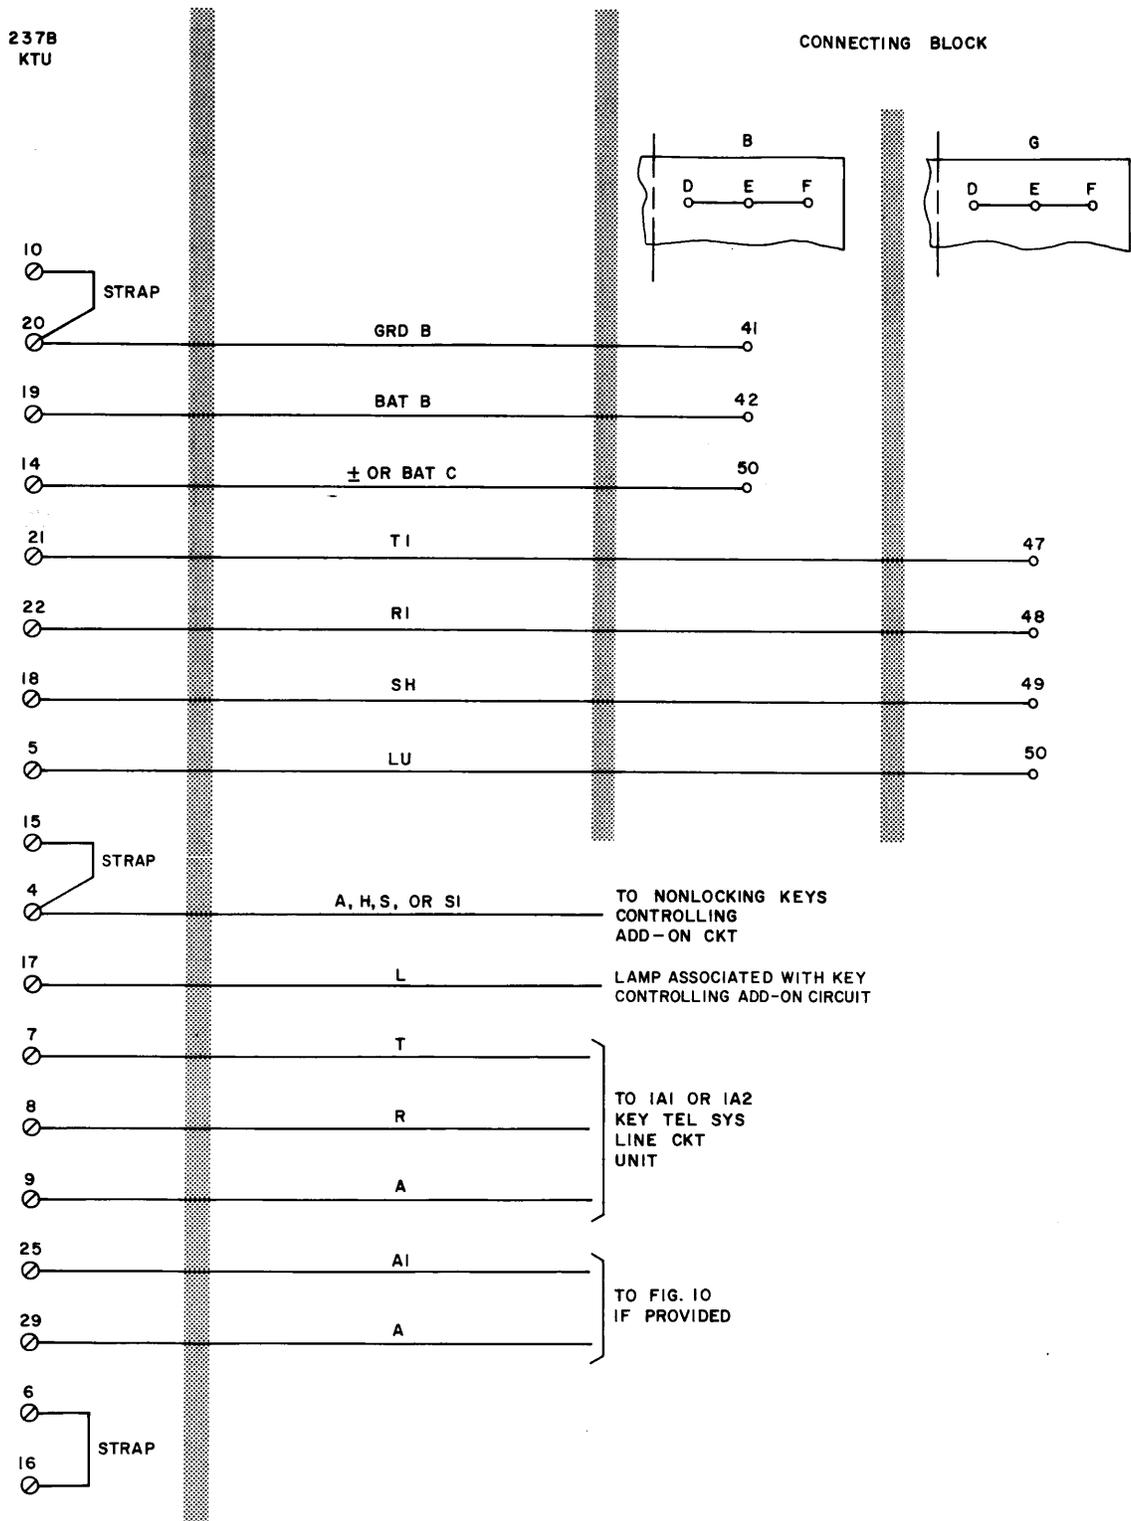


Fig. 4—Connecting 237B KTU Add-On Circuit to 311A16D KSU

TABLE E

CONNECTIONS FOR DIRECT STATION SELECTION (DSS) USING NONLOCKING KEYS (NOTE 1)

STATION OR CONFERENCE GROUP NONLOCKING KEY NUMBER		LEAD DESIG. (NOTE 2)	CONNECTING BLOCK B, D, OR G		
			BLOCK	TERMINAL	
1st Group	4	C	B	11D	
	5			13D	
	6			15D	
	7			17D	
	8			19D	
	9			21D	
	0BC			C(0)	23D
	SG			SG	30D
	2nd Group			21	C
22		13D			
23		15D			
24		17D			
25		19D			
26		21D			
20 BC		C(20)	23D		
SG		SG	30D		
3rd Group		27	C	G	
	28	13D			
	29	15D			
	31	17D			
	32	19D			
	33	21D			
	30 BC	C(30)			23D
	SG	SG			30D

TABLE F


MODIFICATION OF 253-TYPE KTU WHEN AUDIBLE SIGNALING OR DSS IS PROVIDED

FOR CODED STATION			TERMINALS (NOTE)
ON 1ST 253-	ON 2ND 253-	ON 3RD 253-	
4	21	27	1Ø — Ø 2
5	22	28	3Ø — — Ø 4
6	23	29	5Ø — — Ø 6
7	24	31	7Ø — Ø 8
8	25	32	9Ø — — Ø 10
9	26	33	11Ø — — Ø 12

◆ **Note:** When audible signaling or DSS is provided, remove straps and place 400J diodes between terminals on all stations. ◆

Notes: 1. Modify each 253-type KTU per Table F when DSS is provided.

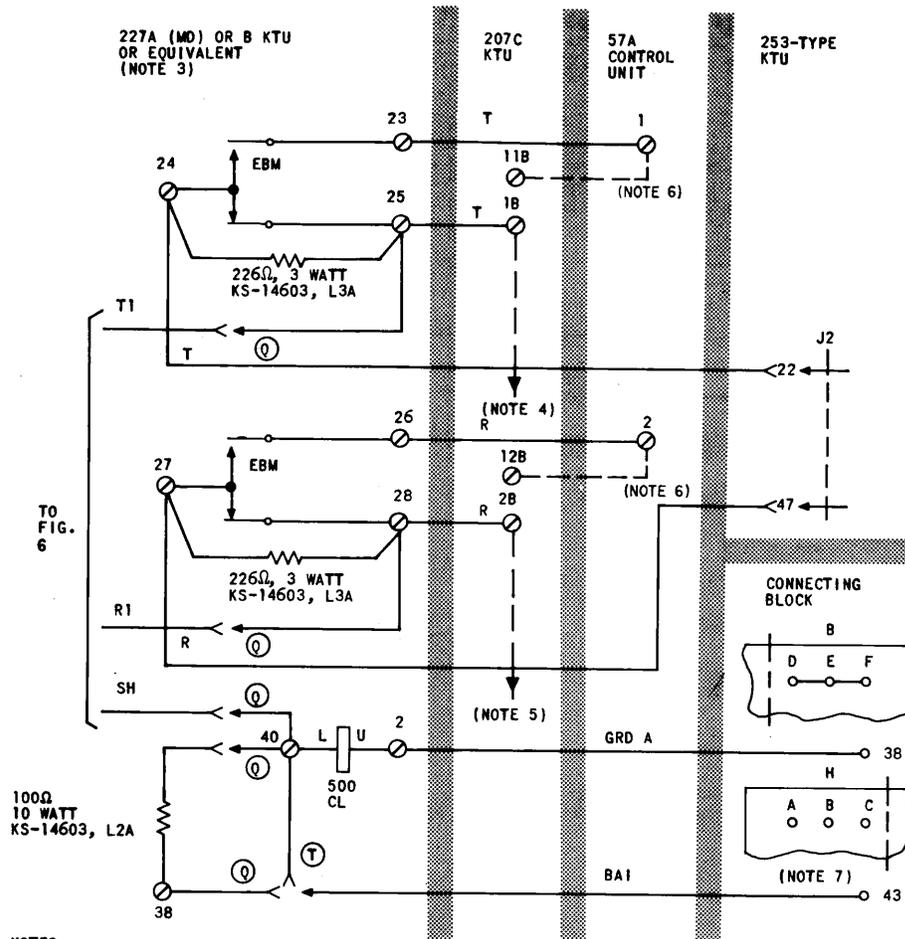
2. Connect C lead to associated non-locking key at station using SG as common ground.



- NOTES:
1. THIS MODIFICATION MAKES A 311A15 KSU (MD) ELECTRICALLY THE SAME AS A 311A160. THIS WILL PERMIT USE OF 253B KTU'S FOR STATION EXPANSION AND 237B KTU'S (FIG. 6) FOR PROVIDING PBX ADD-ON CIRCUIT.
 2. EXISTING 253A KTU'S MUST BE MODIFIED PER FIG. 7 WHEN A 253B OR 237B KTU IS ADDED TO THE SYSTEM.
 3. USE THE MS RELAY OF THE 227-TYPE RELAY AS THE CL RELAY IN THIS CIRCUIT. THE REMAINING RELAYS MAY BE USED FOR OTHER FUNCTIONS SUCH AS AUDIBLE RINGING CONTROL (FIG. 3) IF REQUIRED.
 4. REMOVE ALL THREE T LEADS FROM TERMINAL 1B OF 207C SELECTOR, SPLICE OUT TO LENGTHEN AND CONNECT TO CL RELAY AS SHOWN. OTHER END OF LEADS ARE TERMINATED ONE PER 253-TYPE KTU ON J2, PIN 22.
 5. SIMILARLY, REMOVE R LEADS FROM 2B OF THE 207C SELECTOR, SPLICE AND CONNECT TO CL RELAY. OTHER END OF LEADS ARE TERMINATED ONE PER 253-TYPE KTU ON J2, PIN 47.
 6. REMOVE, INSULATE AND STORE EXISTING LEADS FROM TERMINALS 1 AND 2 AND CONNECT TO CL RELAY AS SHOWN.
 7. IF THIS TERMINAL IS USED, CONNECT LEAD TO ANY SPARE D1 TERMINAL ON CONNECTING BLOCK H. EQUIVALENT TO A BAI TERMINAL.
- (Q) WITH ADD-ON CIRCUIT (FIG. 6)
 (T) WITHOUT ADD-ON CIRCUIT
 --- WIRING TO BE REMOVED

Fig. 5—Modification Required When Using 253B KTUs in 311A15 KSU (MD) or Adding 237B KTU Add-On Circuit

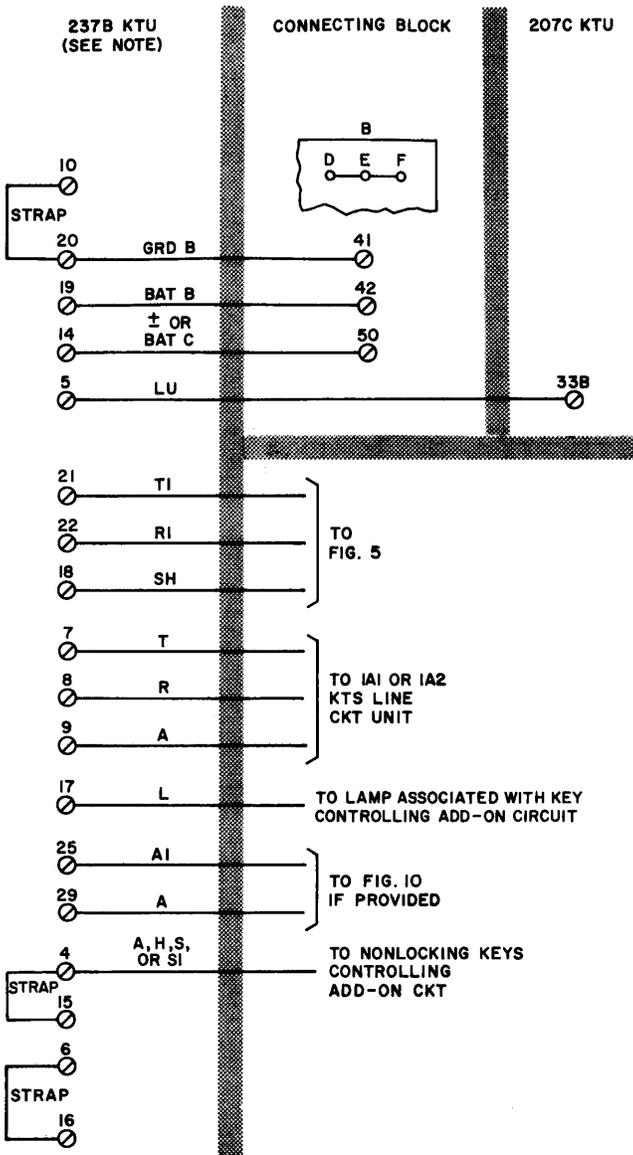SECTION 512-534-400



NOTE:
 WHEN 237B KTU IS PROVIDED FOR 311A15(MD)KSU,
 MODIFY THE KSU PER FIG. 5 AND EXISTING 253A
 KTU'S PER FIG. 7.

Fig. 6—Connecting 237B KTU Add-On Circuit to 311A15 (MD) KSU

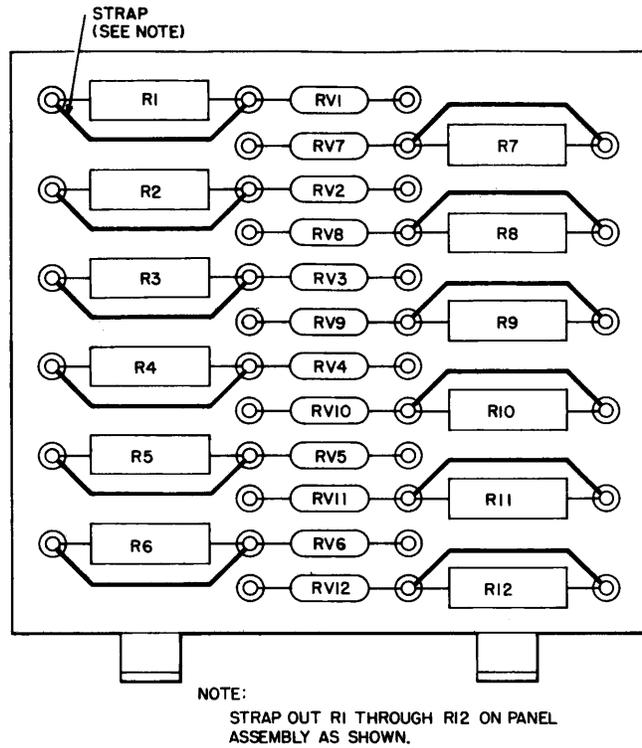


Fig. 7—Modification of Existing 253A KTUs When Adding a 253B or 237B KTU to The System


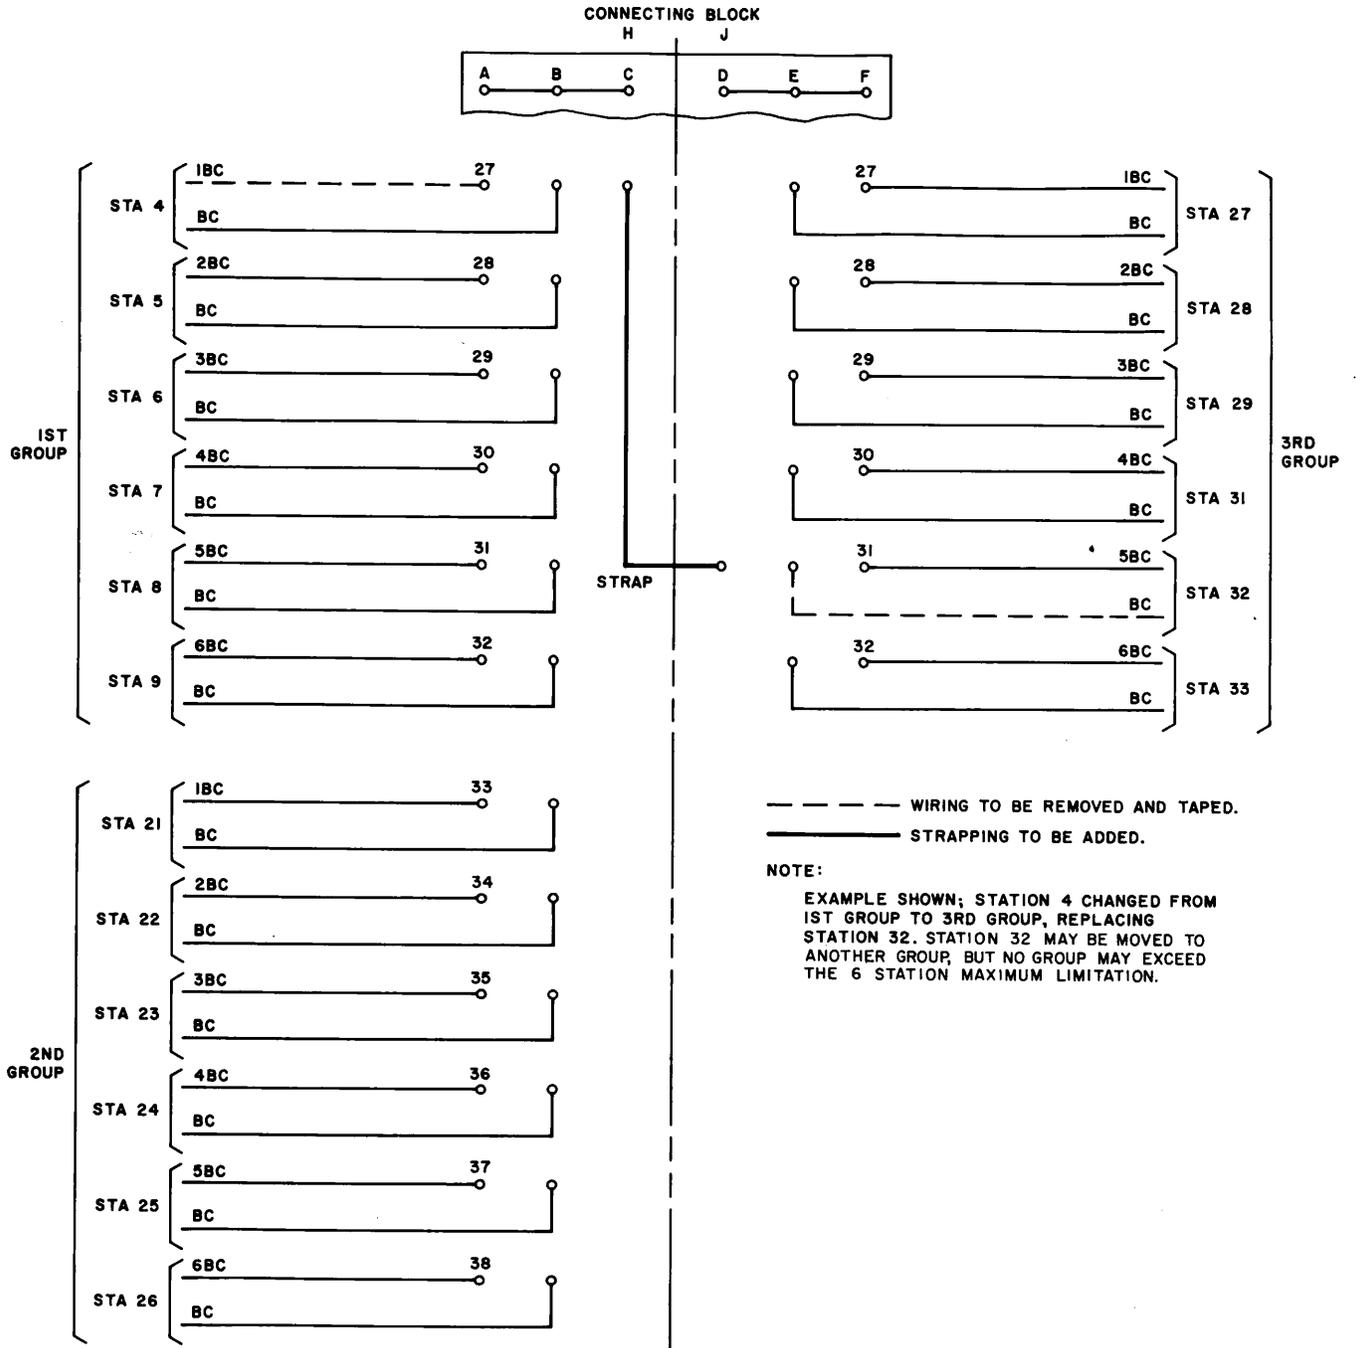


Fig. 8—Changing an Assigned Station From One Group to Another

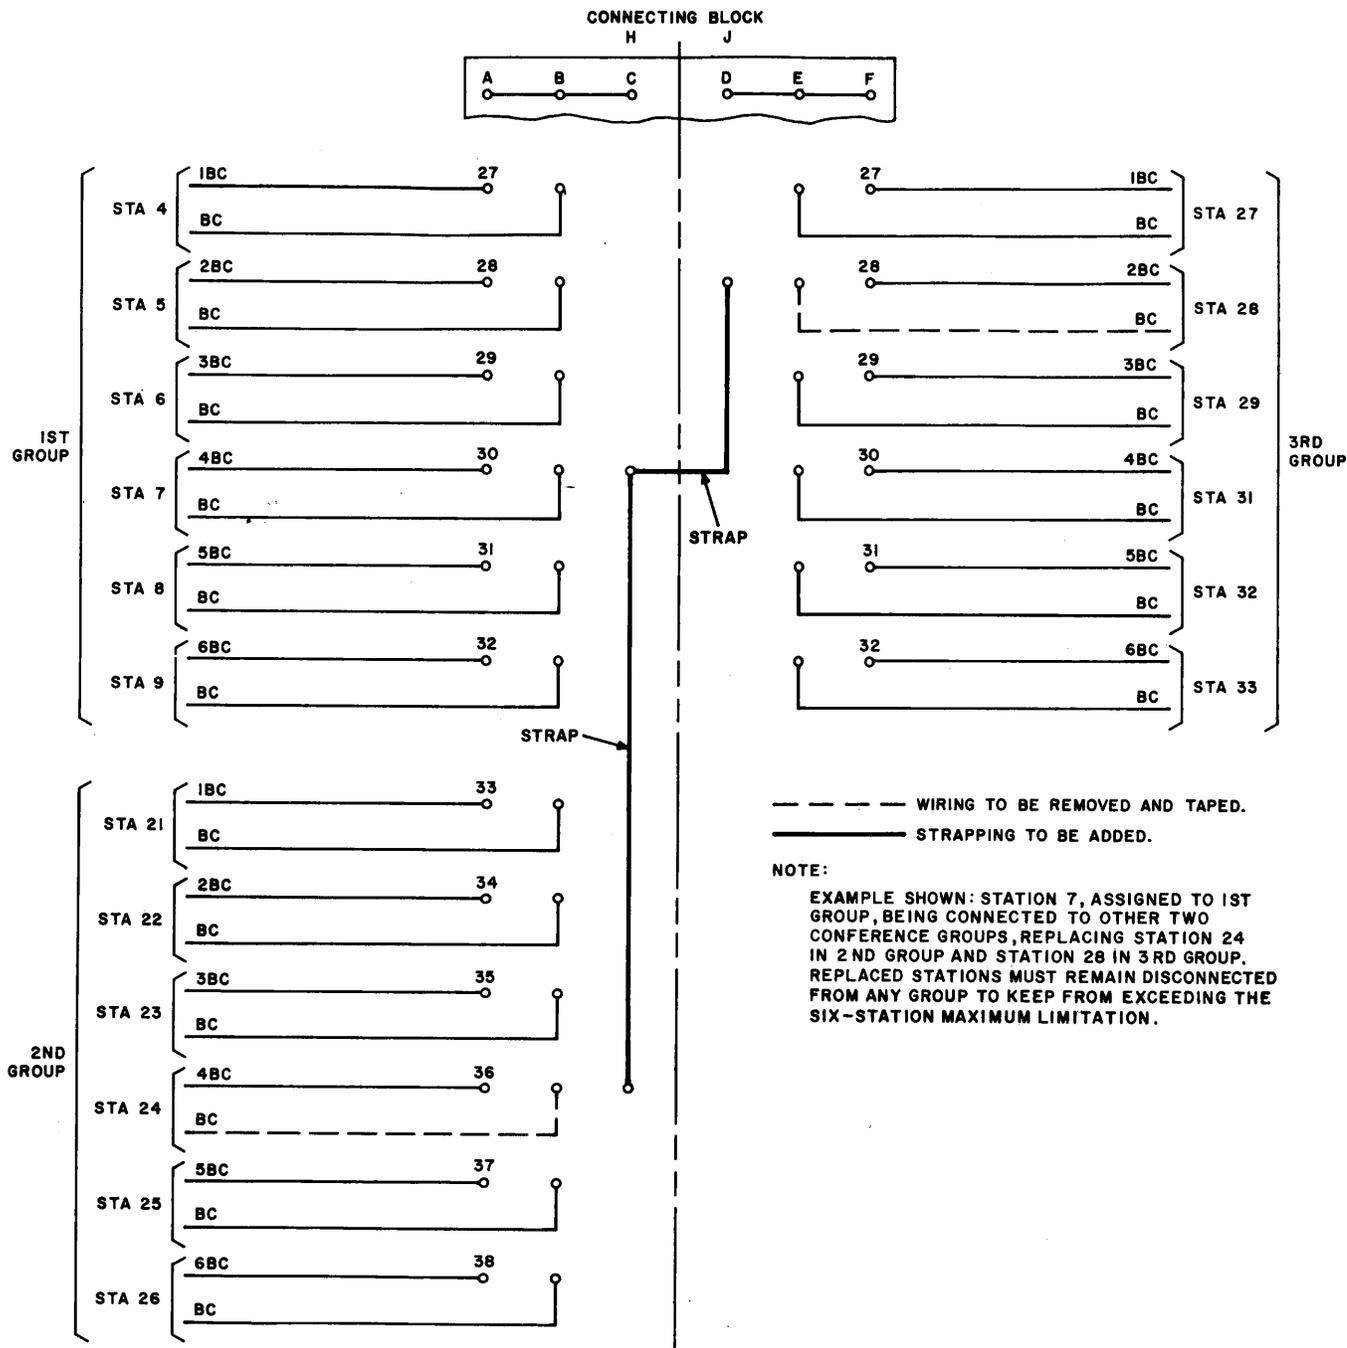

--- WIRING TO BE REMOVED AND TAPED.

— STRAPPING TO BE ADDED.

NOTE:
EXAMPLE SHOWN: STATION 7, ASSIGNED TO 1ST GROUP, BEING CONNECTED TO OTHER TWO CONFERENCE GROUPS, REPLACING STATION 24 IN 2ND GROUP AND STATION 28 IN 3RD GROUP. REPLACED STATIONS MUST REMAIN DISCONNECTED FROM ANY GROUP TO KEEP FROM EXCEEDING THE SIX-STATION MAXIMUM LIMITATION.

Fig. 9—Connecting a Station to All Conference Groups

SECTION 512-534-400


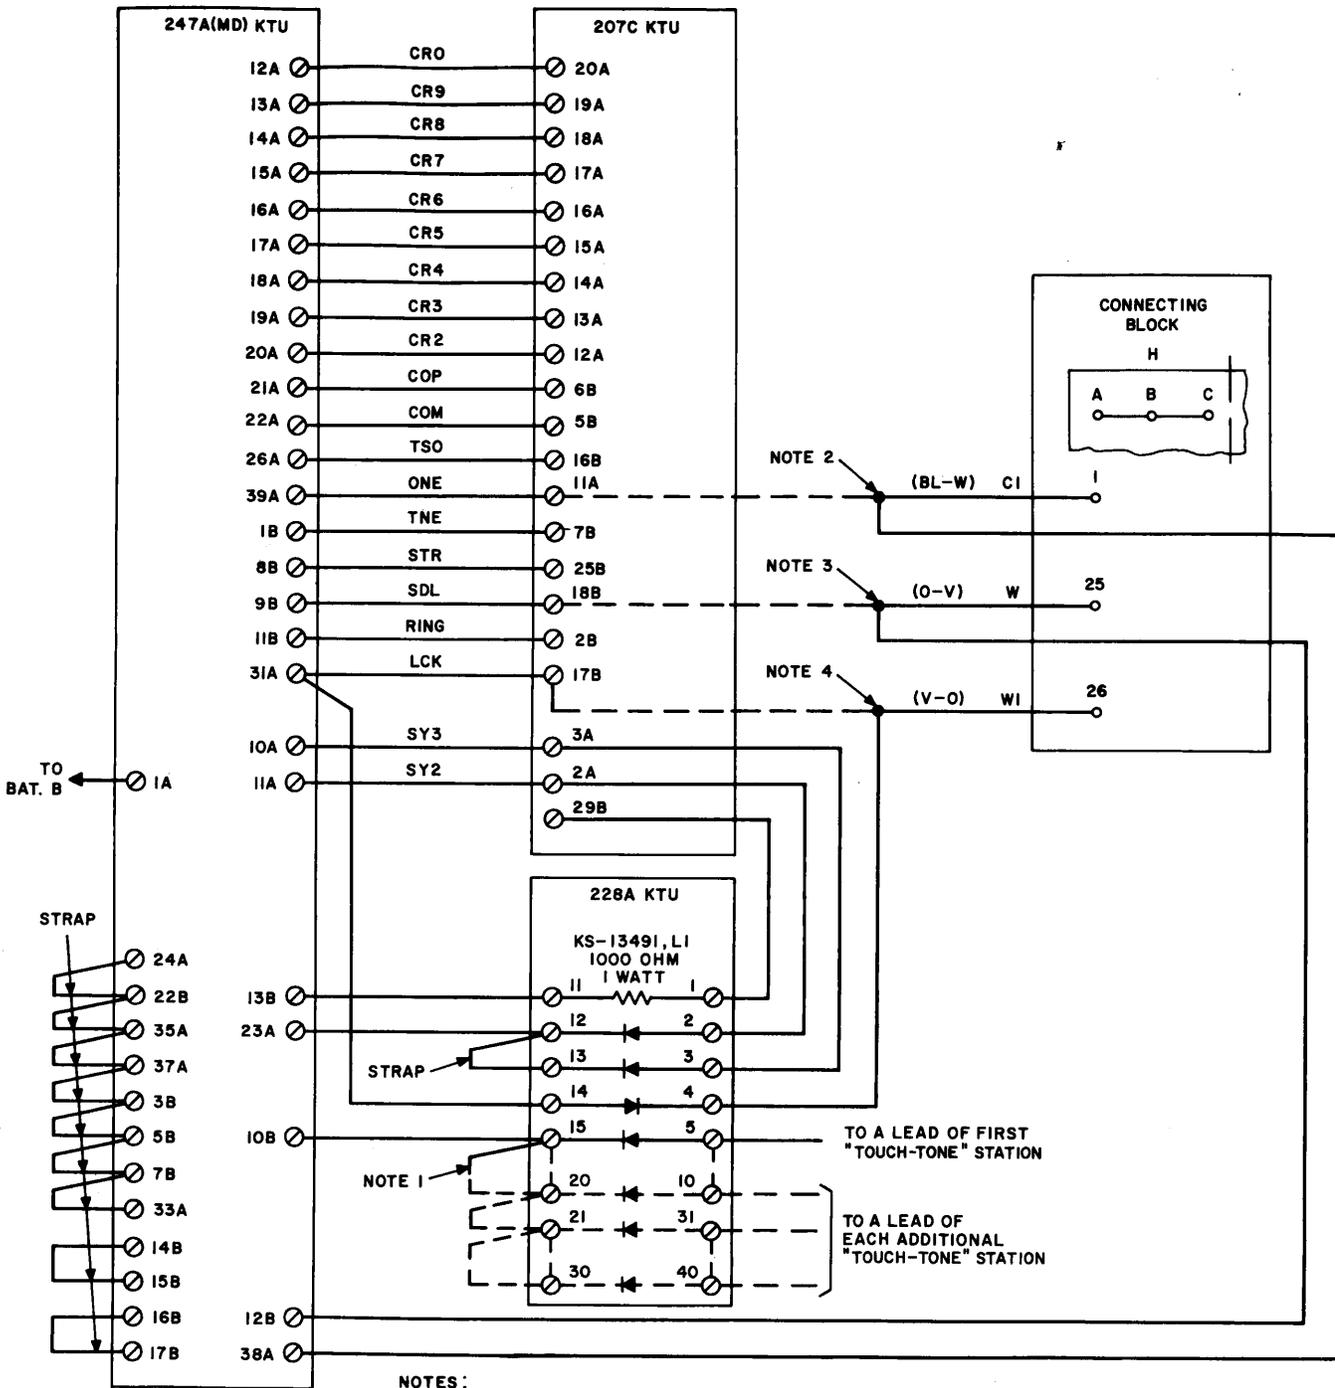



Fig. 11—Modification of KSU to Provide TOUCH-TONE Dialing Using 247A (MD) KTU

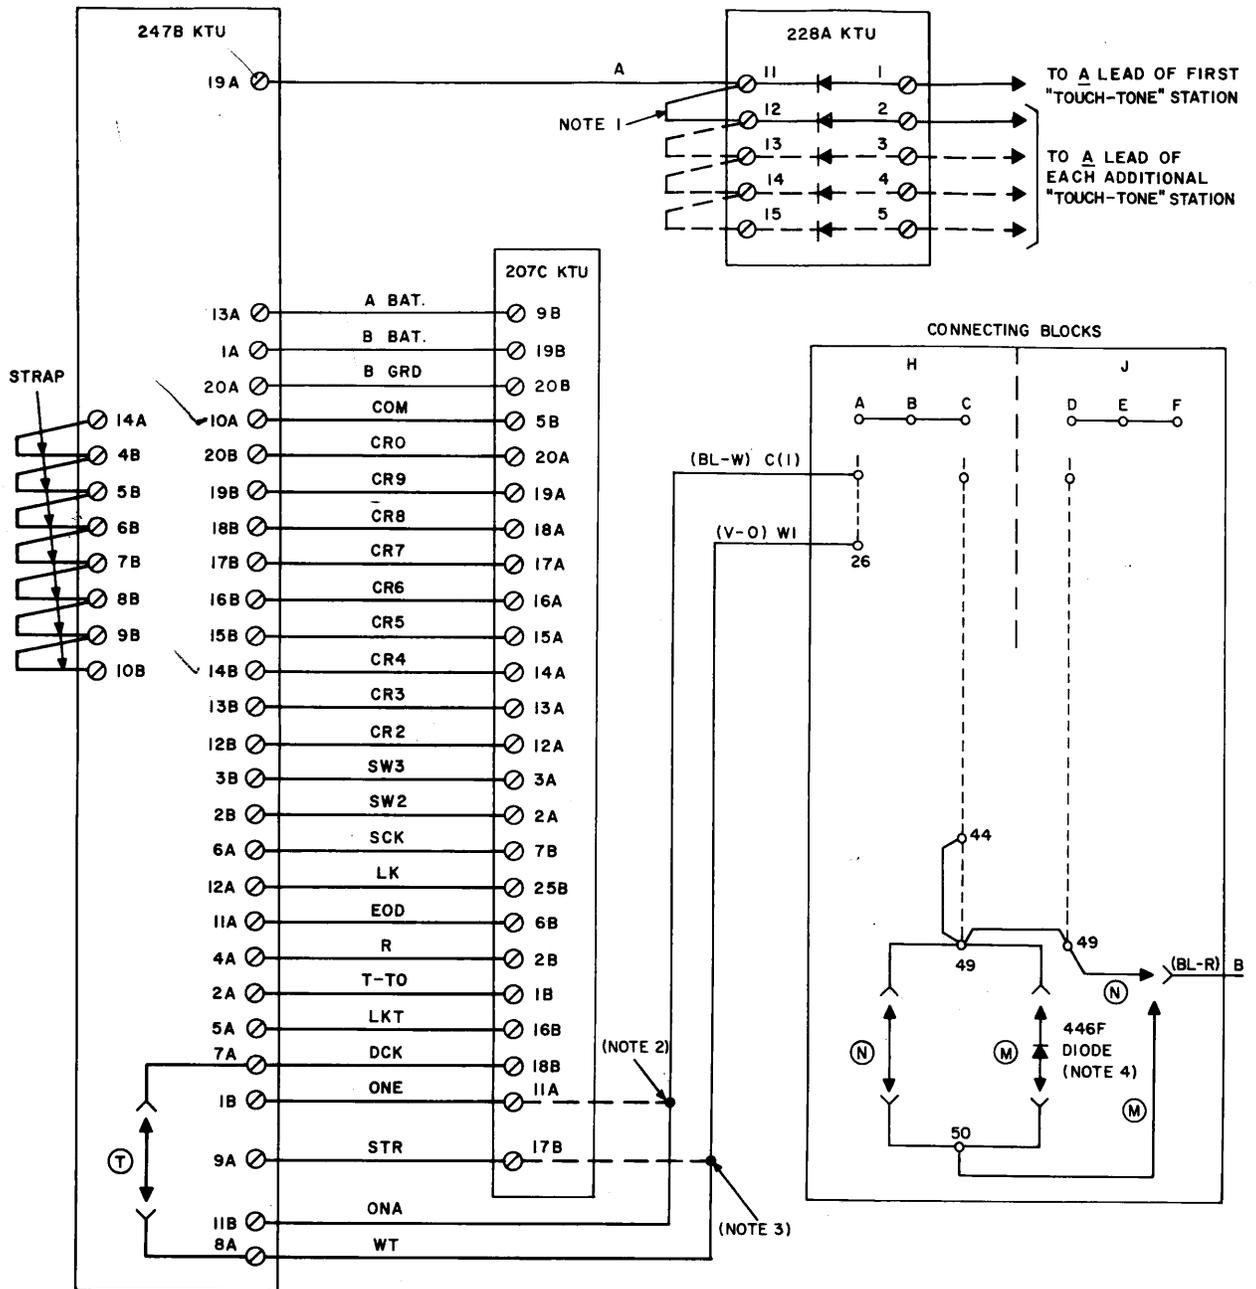

- (M) WITH 247B "TOUCH-TONE" ADAPTER
- (N) WITHOUT 247B "TOUCH-TONE" ADAPTER
- (T) STRAP IS REQUIRED WHEN A 216B KTU IS NOT PROVIDED.

- NOTES:
1. ADD STRAP AND ONE DIODE (400J OR EQUIVALENT) FOR EACH ADDITIONAL "TOUCH-TONE" STATION. MULTIPLE WITH A LEAD TO STATION AT BLOCK A, B, OR C. DO NOT DISCONNECT STATION A LEAD.
 2. DISCONNECT AND REMOVE BLUE-WHITE LEAD FROM TERMINAL 11A OF 207C KTU. SPLICE AS REQUIRED, AND CONNECT THE LEAD TO TERMINAL 11B OF 247B KTU.
 3. DISCONNECT AND REMOVE VIOLET-ORANGE LEAD FROM TERMINAL 17B OF 207C KTU. SPLICE AS REQUIRED, AND CONNECT THE LEAD TO TERMINAL 8A OF 247B KTU.
 4. WHEN OPTION (M) IS REQUIRED, INSTALL DIODE USING 183A2 ADAPTERS, ORDERED SEPARATELY.

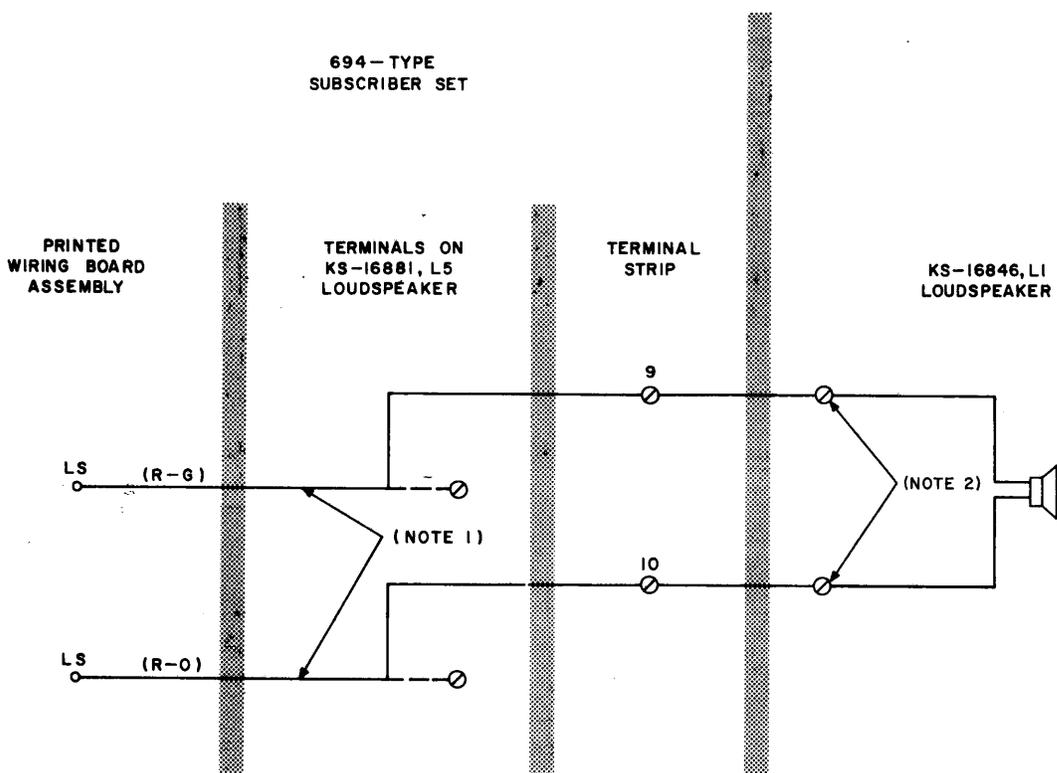Fig. 12—Modification of KSU to Provide TOUCH-TONE Dialing Using 247B KTU



NOTES:

1. REMOVE LEADS FROM TERMINALS ON KS-16881, L5 LOUDSPEAKER AND CONNECT LEADS TO TERMINALS 9 AND 10.
2. ADD APPROVED WIRING, BY SPLICING OR USING D-TYPE CONNECTORS, TO LEADS PROVIDED BY KS-16846, L1 LOUDSPEAKER, TAPE, AND CONNECT TO TERMINALS 9 AND 10.

Fig. 13—Connections For KS-16846, List 1 External Loudspeaker

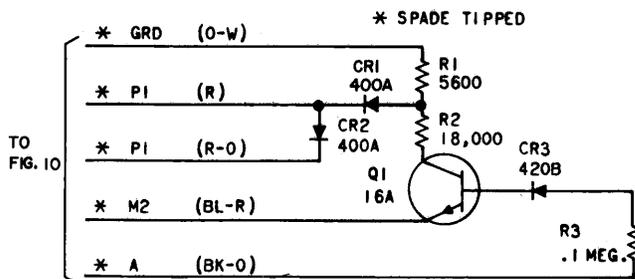


Fig. 14—D-180006 Kit of Parts, Schematic