

## JACKS AND PLUGS IDENTIFICATION AND SERVICE

### 1. GENERAL

1.001 This addendum supplements Section 461-630-100, Issue 10. Place this pink sheet ahead of Page 1 of the section.

1.002 This addendum is issued to add information on the 101A sleeve and to show the 43B bracket MD.

### 2. CHANGES TO SECTION

2.001 On Page 2, following paragraph 2.06, add the following:

2.06.1 The 101A sleeve (Fig. 32) is used to protect the prewiring while the drywall is being cut around the 63B bracket as the drywall is being installed on the studding. The metal tube snaps into either access hole of the bracket before the wiring is placed.

2.06.2 The 43B bracket is rerated MD and is replaced by the 842615544 bracket which is supplied as part of the 65A faceplate (Fig. 38). The 842615544 bracket will also be supplied as a component of the 547B jack, 550A jack and 625B connecting block.

2.002 On Page 20, Fig. 32 is obsolete. A new Fig. 32 is shown in this addendum.

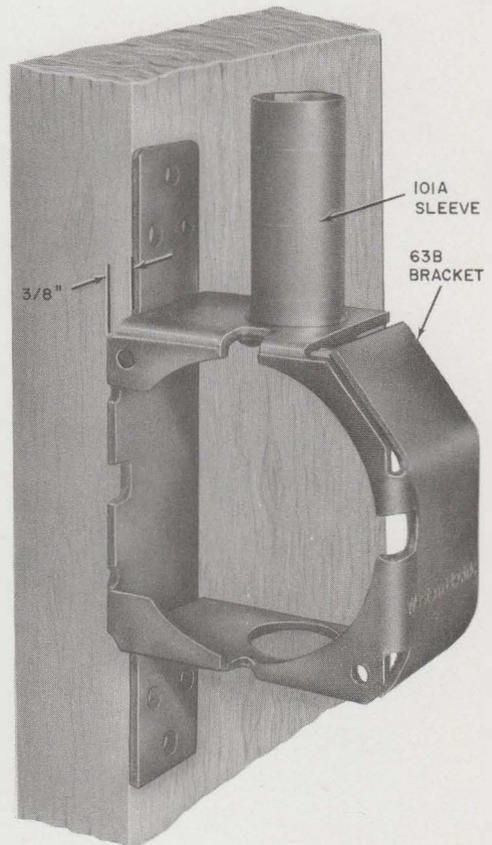


Fig. 32—63B Bracket With 101A Sleeve Installed

### NOTICE

Not for use or disclosure outside the  
Bell System except under written agreement

Printed in U.S.A.

Page 1  
1 Page