

DROP WIRE

PLACING, REPLACING, AND LOWERING

1. General

- 1.01 This addendum supplements Section 462-400-206, Issue 2.
- 1.02 This addendum is issued to expand the precautions to be taken when placing drop wires.

2. Precautions

- 2.01 Added emphasis:

CAUTION

SURVEY AND PLAN EACH JOB CAREFULLY.....

Consider all phases.....

Is there a tree problem or a trimming requirement??

Is a road crossing required??

Is traffic a problem at the location??


Is visibility adequate for road conditions??

Is help needed to do the job safely??

THEN....

Plan and complete the job in accordance with the provisions of this practice. When necessary, call for assistance to insure safety for yourself and for the public.

REMEMBER.....

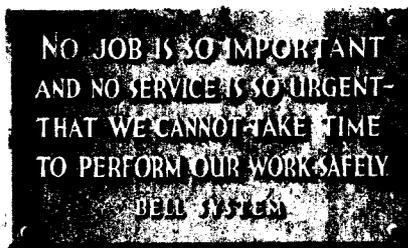

3. Placing Drop Wire Over Roadway

Revise 3.01 (b) to read as follows:

- (b) When no vehicles or pedestrians are approaching, drop the hand line and remaining drop wire to the ground. If possible, try to insure that they will fall on the field side of the pole clear of all personal property, (shrubs, flowers, etc.). DO NOT CARRY THE HANDLINE OR EXCESS DROP WIRE DOWN THE POLE.