

**Lucent Technologies**  
Bell Labs Innovations



**INTUITY™ AUDIX®**  
High Capacity Option Administration

585-310-571  
Comcode 108037219  
Issue 3  
November 1997

Copyright © 1997, Lucent Technologies  
All Rights Reserved  
Printed in U.S.A.

#### Notice

Every effort was made to ensure that the information in this book was complete and accurate at the time of printing. However, information is subject to change.

#### Your Responsibility for Your System's Security

Toll fraud is the unauthorized use of your telecommunications system by an unauthorized party, for example, persons other than your company's employees, agents, subcontractors, or persons working on your company's behalf. Note that there may be a risk of toll fraud associated with your telecommunications system and, if toll fraud occurs, it can result in substantial additional charges for your telecommunications services.

You and your system manager are responsible for the security of your system, such as programming and configuring your equipment to prevent unauthorized use. The system manager is also responsible for reading all installation, instruction, and system administration documents provided with this product in order to fully understand the features that can introduce risk of toll fraud and the steps that can be taken to reduce that risk. Lucent Technologies does not warrant that this product is immune from or will prevent unauthorized use of common-carrier telecommunication services or facilities accessed through or connected to it. Lucent Technologies will not be responsible for any charges that result from such unauthorized use.

#### Lucent Technologies Fraud Intervention

If you *suspect that you are being victimized* by toll fraud and you need technical support or assistance, call Technical Service Center Toll Fraud Intervention Hotline at 1 800 643-2353.

#### Federal Communications Commission Statement

**Part 15: Class A Statement.** This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio-frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference, in which case the user will be required to correct the interference at his own expense.

**Part 68: Network Registration Number.** This equipment is registered with the FCC in accordance with Part 68 of the FCC Rules. It is identified by FCC registration number AS5USA-20411-VM-E.

**Part 68: Answer-Supervision Signaling.** Allowing this equipment to be operated in a manner that does not provide proper answer-supervision signaling is in violation of Part 68 Rules. This equipment returns answer-supervision signals to the public switched network when:

- Answered by the called station
- Answered by the attendant
- Routed to a recorded announcement that can be administered by the CPE user

This equipment returns answer-supervision signals on all DID calls forwarded back to the public switched telephone network. Permissible exceptions are:

- A call is unanswered
- A busy tone is received
- A reorder tone is received

#### Canadian Department of Communications (DOC) Interference Information

This digital apparatus does not exceed the Class A limits for radio noise emissions set out in the radio interference regulations of the Canadian Department of Communications.

Le Présent Appareil Numérique n'émet pas de bruits radioélectriques dépassant les limites applicables aux appareils numériques de la class A prescrites dans le reglement sur le brouillage radioélectrique édicté par le ministère des Communications du Canada.

#### Trademarks

See "About This Document."

#### Ordering Information

**Call:** Lucent Technologies Publications Center  
Voice 1 800 457-1235 International Voice 317 361-5353  
Fax 1 800 457-1764 International Fax 317 361-5355

**Write:** Lucent Technologies Publications Center  
P.O. Box 4100  
Crawfordsville, IN 47933

**Order:** Document No. 585-310-571  
Comcode 108037219  
Issue 3, November 1997

For additional documents, refer to the section in "About This Document" entitled "Related Resources."

You can be placed on a standing order list for this and other documents you may need. Standing order will enable you to automatically receive updated versions, billed to account information that you provide. For more information or to be put on a list to receive future issues of this document, contact the Lucent Technologies Publications Center.

#### European Union Declaration of Conformity

Lucent Technologies Business Communications Systems declares that MAP/100 equipment specified in this document conforms to the referenced European Union (EU) Directives and Harmonized Standards listed below:

EMC Directive 89/336/EEC  
Low-Voltage Directive 73/23/EEC



The "CE" mark affixed to the equipment means that it conforms to the above directives.

This document was prepared by the Product Documentation Development, Lucent Technologies, Columbus, OH.



---

# Contents

---

<b>About This Document</b>	v
■ Purpose	v
■ Intended Audiences	v
■ Release History	v
■ How to Use This Book	vi
■ Conventions Used in This Book	vi
Terminology	vi
Terminal Keys	ix
Screen Displays	x
Other Typography	x
Safety Alert Labels	xi
■ Related Resources	xi
Documentation	xi
INTUITY Release 3.0	xii
INTUITY Release 4.0	xii
Training	xiii
INTUITY Release 3.0	xiii
INTUITY Release 4.0	xiii
■ Trademarks and Service Marks	xiii
■ How to Comment on This Book	xiv

---

<b>1</b>	<b>INTUITY AUDIX High Capacity Option Feature Description</b>	<b>1</b>
■	What's in This Chapter?	1
■	What is the High Capacity Option?	1
	INTUITY AUDIX High Capacity Option Features	3
	System Capacity	3
	Single Number Access	3
	Enhanced Availability	4
	Scalability	4
	Emergency Call Answer	5
	Administration Access via the LAN	6
	Support for Switches Connected in a Distributed Communications System (DCS)	6

---

# Contents

Caller Information	7
High Capacity Option Auto-Attendant Features	7
Networking Power	7
Mailbox Integration	7
Multi-level User Interface	7
Routing	8
Hardware Requirements	8
Software Requirements	8
Comparing INTUITY AUDIX and INTUITY AUDIX with the High Capacity Option	9
■ High Capacity Option Call Flows	10
Call Answer	10
Mailbox Access	10

---

<b>2</b>	<b>High Capacity Option Administration Planning</b>	13
■	What's in This Chapter?	13
■	High Capacity Option Administration Planning	13

---

<b>3</b>	<b>High Capacity Option Administration</b>	17
■	What's in This Chapter?	17
■	DEFINITY LAN Gateway Administration	17
	Assigning a Host Name and IP Address to the DEFINITY LAN Gateway	18
	Adding the INTUITY AUDIX Systems to the Local Host Table	20
	Adding a Client Link	21
	Checking the ASAI Link	24
■	DEFINITY G3 Administration	25
	Verifying ASAI Feature Settings	25
	Verifying the Number of ASAI/Adjunct Link Stations	26
	Adding a Station for the Primary and Secondary Adjunct Systems	28

---

## Contents

Creating a Vector for an INTUITY AUDIX System	30
Creating a Mailbox Access Vector	31
Creating VDNs	32
Administering Hunt Groups	34
Defining a Coverage Path	35
■ INTUITY AUDIX Administration	37
Assign Service to a Called Number	37
Setting Community Sending Restrictions	38
■ Verify IMAPI Sessions	40
■ High Capacity Administration	41
High Capacity AUDIX Machine Administration	42
Switch Adjunct System Administration	46
Switch Adjunct Module Control Menu	48
High Capacity Auto-Attendant	49
Step 1: Assign High Capacity Option Auto-Attendant Service	50
Step 2: Administer the Auto-Attendant as a User	51
Step 3: Administer the High Capacity Option Auto-Attendant	56
Step 4: Record Greeting(s) for the High Capacity Option Auto-Attendant Menu(s)	62
Automated Attendant Examples	62
Administer a Main Attendant	62
Administer Nested Attendants	63
Removing a High Capacity Option Auto-Attendant	64

---

<b>4</b>	<b>High Capacity Option Acceptance Tests</b>	67
■	What's in This Chapter?	67
■	Testing Prerequisites	68
■	Testing Link Status and Ping	68
	Test 1	68
	Test 2	70
■	Adding Test Subscribers	71
■	Running a Remote Update	72
■	Testing INTUITY AUDIX Call Answer	74

---

## Contents

Creating and Sending a Test Message	74
Verifying Emergency Call Answer	75
■ Testing the Mailbox Access VDN	75
■ Testing Adjunct System Transfers	76
■ Removing Test Subscribers	77

---

<b>A</b>	<b>INTUITY Administration in the Expert Agent Selection Environment</b>	79
	■ What's in This Appendix?	79
	■ Administering the Hunt Group in the EAS Environment	79
	■ Administering the Agent in the EAS Environment	83

---

<b>ABB</b>	<b>Abbreviations</b>	87
------------	----------------------	----

---

<b>GL</b>	<b>Glossary</b>	89
-----------	-----------------	----

---

	<b>Index</b>	119
--	--------------	-----

---

## About This Document

---

### **Purpose**

---

This book, *INTUITY™ AUDIX® High Capacity Option Administration*, 585-310-571, contains instructions for administering the INTUITY AUDIX High Capacity Option system. The book only contains the information that is specific to administration for INTUITY AUDIX High Capacity Option systems. See *INTUITY™ AUDIX® Release 3.3 Administration and Feature Operations*, 585-310-552 or *INTUITY™ Messaging Solutions Release 4 Administration*, 585-310-564, for information on administration for the Lucent INTUITY AUDIX system.

### **Intended Audiences**

---

This book is intended primarily for the personnel responsible for configuration and administration of INTUITY AUDIX High Capacity Option systems.

### **Release History**

---

This is the third release of this book.

## **How to Use This Book**

---

This book is organized into the following sections:

- Chapter 1, "Intuity AUDIX High Capacity Option Feature Description", provides a description of the INTUITY AUDIX High Capacity Option. It includes information about hardware and software requirements and call flows for users and callers.
- Chapter 2, "High Capacity Option Administration Planning", provides information needed during the High Capacity Option administration.
- Chapter 3, "High Capacity Option Administration", provides administration information for the DEFINITY LAN Gateway, the DEFINITY G3, and the INTUITY AUDIX system that is specific to the INTUITY AUDIX High Capacity Option.
- Chapter 4, "High Capacity Option Acceptance Tests", provides the acceptance test procedures specific to the High Capacity Option cluster.
- Appendix A, "Intuity Administration in the Expert Agent Selection Environment", provides the procedures for administering an INTUITY High Capacity Option hunt group on a DEFINITY G3 switch in the Expert Agent Selection (EAS) environment.

## **Conventions Used in This Book**

---

This section describes the conventions used in this book.

### **Terminology**

---

- The word "type" means to press the key or sequence of keys specified. For example, an instruction to type the letter "y" is shown as  
Type **y** to continue.
- The word "enter" means to type a value and then press **(ENTER)**. For example, an instruction to type the letter "y" and press **(ENTER)** is shown as  
Enter **y** to continue.

- The word “select” means to move the cursor to the desired menu item and then press `(ENTER)`. For example, an instruction to move the cursor to the `start test` option on the Network Loop-Around Test screen and then press `(ENTER)` is shown as

Select Start Test.

- The Lucent INTUITY system displays *windows*, *screens*, and *menus*.
  - “Windows” show and request system information (Figure 1 and Figure 2).

---

```
High Capacity AUDIX Machine Administration

Machine Name: _____ IP Address: _____
Hunt Group Extension: _____ VDN: _____
Primary Language: _____ Secondary Language: _____

Emergency Call Answer:

Starting Temporary Mailbox Extension: _____ Mailboxes Required: ____
Ending Temporary Mailbox Extension: _____
Community ID: __
```

---

**Figure 1. Example of a Lucent INTUITY Window**

---

```
Switch Adjunct Administration Form

Mailbox Access UDN: 54000
Definity LAN Gateway IP Address: 135.24.92.36
Primary Adjunct Machine Name: lzleo1
Secondary Adjunct Machine Name: lzleo2
EAS Enabled on Switch: y
```

---

**Figure 2. Example of a Lucent INTUITY Window**

---

- “Screens” request that you enter a command at the enter command: prompt (Figure 3).
- “Menus” (Figure 4) present options from which you can choose to view another menu, screen, or window.

```
Active Alarms: Logins: 2
change machine Page 1 of 2
MACHINE PROFILE
Machine Name: cbueitt Type: local Location: local
Voiced Name? [ ] Extension Length: 4
Voice ID: 0 Default Community: 1
ADDRESS RANGES
Prefix Start Ext. End Ext. Warnings
1: _____ 0000 9999
2: _____
3: _____
4: _____
5: _____
6: _____
7: _____
8: _____
9: _____
10: _____
enter command: change machine
```

---

**Figure 3. Example of a Lucent INTUITY Screen**

---

```
INTUITY (TM) Main Menu
AUDIX Administration
Customer/Services Administration
High Capacity Administration
Networking Administration
Switch Interface Administration
Upgrade
Voice System Administration
```

---

**Figure 4. Example of a Lucent INTUITY Menu**

---

- The words “subscriber” and “user” are interchangeable terms that describe a person administered on the Lucent INTUITY system. The word “user” is the preferred term in the text; however, “subscriber” appears on most of the screens.

### **Terminal Keys**

---

- Keys that you press on your terminal or PC are represented as rounded boxes. For example, an instruction to press the enter key is shown as  
Press **ENTER**.
- Two or three keys that you press at the same time on your terminal or PC (that is, you hold down the first key while pressing the second and/or third key) are represented as a series of separate rounded boxes. For example, an instruction to press and hold **ALT** while typing the letter “d” is shown as  
Press **ALT** **D**.
- Function keys on your terminal, PC, or system screens, also known as *soft keys*, are represented as round boxes followed by the function or value of that key enclosed in parentheses. For example, an instruction to press function key 2 is shown as  
Press **F2** (CHOICES).
- Keys that you press on your telephone keypad are represented as square boxes. For example, an instruction to press the first key on your telephone keypad is shown as  
Press **1** to record a message.

## Screen Displays

---

- Values, system messages, field names, and prompts that appear on the screen are shown in typewriter-style `constant-width` type, as shown in the following examples:

Example 1:

Enter the number of ports to be dedicated to outbound traffic in the `Maximum Simultaneous Ports` field.

Example 2:

`Alarm Form Update was successful.`

`Press <Enter> to continue.`

- The sequence of menu options that you must select to display a specific screen or submenu is shown as follows:

Start at the Lucent INTUITY Administration menu and select

```
> Customer/Services Administration
```

```
> Alarm Management
```

- Screens shown in this book are examples only. The screens you see on your machine will be similar, but not exactly the same.

## Other Typography

---

- Commands and text you type in or enter appear in **bold type**, as in the following examples:

Example 1:

Enter **change-switch-time-zone** at the `enter command:` prompt.

Example 2:

Type **high** or **low** in the `Speed:` field.

- Command variables are shown in ***bold italic*** type when they are part of what you must type in and *regular italic* type when they are not, for example

Enter **ch ma *machine\_name***, where *machine\_name* is the name of the call delivery machine you just created.

## **Safety Alert Labels**

---

This book uses the following symbols to call your attention to potential problems that could cause personal injury, damage to equipment, loss of data, service interruptions, or breaches of toll fraud security:



**CAUTION:**

*Indicates the presence of a hazard that if not avoided can or will cause minor personal injury or property damage, including loss of data.*



**WARNING:**

*Indicates the presence of a hazard that if not avoided can cause death or severe personal injury.*



**DANGER:**

*Indicates the presence of a hazard that if not avoided will cause death or severe personal injury.*

## **Related Resources**

---

This section describes additional documentation and training available for you to learn more about installation of the Lucent INTUITY product.

### **Documentation**

---



**NOTE:**

The *Lucent INTUITY Documentation Guide*, 585-310-540, contains a detailed description of all books included in the Release 3.0 Lucent INTUITY documentation library. *Lucent INTUITY™ Messaging Solutions Release 4 Documentation Guide*, 585-310-016, contains a detailed description of all books included in the Release 4 Lucent INTUITY documentation library. Always see the appropriate book for specific information on planning, installing, administering, or maintaining a Lucent INTUITY system.

It is suggested that you obtain and use the following books in conjunction with this installation book:

### **INTUITY Release 3.0**

- *Lucent INTUITY MAP/100 Hardware Installation*, 585-310-139, for detailed information on installing hardware on the MAP/100
- *Lucent INTUITY Software Installation for Release 3.0*, 585-310-160, for detailed information on installing software
- *Lucent INTUITY AUDIX High Capacity Option Installation*, 585-310-753, for a detailed source of complete installation procedures for INTUITY AUDIX High Capacity Option systems
- *Lucent INTUITY AUDIX High Capacity Option Maintenance*, 585-310-572, for a detailed source of complete maintenance procedures and troubleshooting information for INTUITY AUDIX High Capacity Option systems

### **INTUITY Release 4.0**

- *Lucent INTUITY™ Messaging Solutions Release 4 MAP/100 System Installation*, 585-310-173, for detailed information on installing the MAP/100
- *Lucent INTUITY™ Messaging Solutions Release 4 MAP/100 Maintenance*, 585-310-174 for detailed information on installing software
- *INTUITY™ AUDIX® High Capacity Option Installation*, 585-310-753, for a detailed source of complete installation procedures for INTUITY AUDIX High Capacity Option systems
- *INTUITY™ AUDIX® High Capacity Option Maintenance*, 585-310-572, for a detailed source of complete maintenance procedures and troubleshooting information for INTUITY AUDIX High Capacity Option systems

Use the following book for information on security and toll fraud issues for INTUITY Release 3.0 and greater:

- *BCS Products Security Handbook*, 555-025-600

See the inside front cover for information on how to order Lucent INTUITY documentation.

## **Training**

---

The following training is recommended as a prerequisite to installing a INTUITY system:

### **INTUITY Release 3.0**

- Course No. MO1616A, INTUITY Messaging Solutions Installation and Maintenance
- Course No. MC9615C, INTUITY AUDIX High Capacity Option and INTUITY Interchange

### **INTUITY Release 4.0**

- Course No. BTT506H, INTUITY Messaging Solutions Installation and Maintenance
- Course No. BTC426T, INTUITY AUDIX High Capacity Option and Lucent INTUITY Interchange

For more information on Lucent INTUITY training, call the BCS Education and Training Center at one of the following numbers:

- Organizations within Lucent: (904) 636-3261
- Lucent customers and all others: (800) 255-8988

## **Trademarks and Service Marks**

---

The following trademarked products are mentioned in this book:

- AUDIX, Claviers, and DEFINITY are registered trademarks and INTUITY is a trademark of Lucent Technologies.
- BayStack is a trademark of Bay Networks, Inc.
- Ethernet is a trademark of Xeros Corporation.
- MAX is a trademark of ASCEND Communications, Inc.
- UNIX is a registered trademark of UNIX System Laboratories, Inc.

## **How to Comment on This Book**

We are interested in your suggestions for improving this book. Please complete and return the reader comment card that is located at the end of this document.

If the reader comment card has been removed, send your comments to:

Lucent Technologies  
Product Documentation Development Department  
Room 22-2H15  
11900 North Pecos Street  
Denver, Colorado 80234

Please be sure to mention the name and order number of this book.

---

# INTUITY AUDIX High Capacity Option Feature Description

# 1

---

## What's in This Chapter?

This chapter provides a description of the INTUITY™ AUDIX® High Capacity Option. It includes information about hardware and software requirements and call flows for subscribers and callers.

## What is the High Capacity Option?


The INTUITY AUDIX High Capacity Option offers large customers greater flexibility when managing their voice or fax messages from their telephones or personal computers. The High Capacity Option consists of multiple INTUITY AUDIX systems configured as message servers. These multiple systems appear as one large system to the subscribers with adjunct system software designed specifically for the High Capacity Option. The adjunct system provides single-number access to the subscribers on all the individual systems by using an adjunct/switch application interface (ASAI) to a DEFINITY® G3R V4 (or later) switch through a DEFINITY Local Area Network (LAN) Gateway. The message servers are linked together over a transmission control protocol/internet protocol (TCP/IP) LAN.

### **⇒ NOTE:**

Administrative access is to each individual system. There is no centralized administration for the High Capacity Option. The High Capacity Option only makes INTUITY AUDIX systems appear as one to the end telephone users, not to the administrator.

In addition, the High Capacity Option provides increased call answer availability by enabling a back-up message server to accept a call answer message if the subscriber's home message server is unavailable.

Figure 1-1 shows the architecture for the INTUITY AUDIX High Capacity Option.

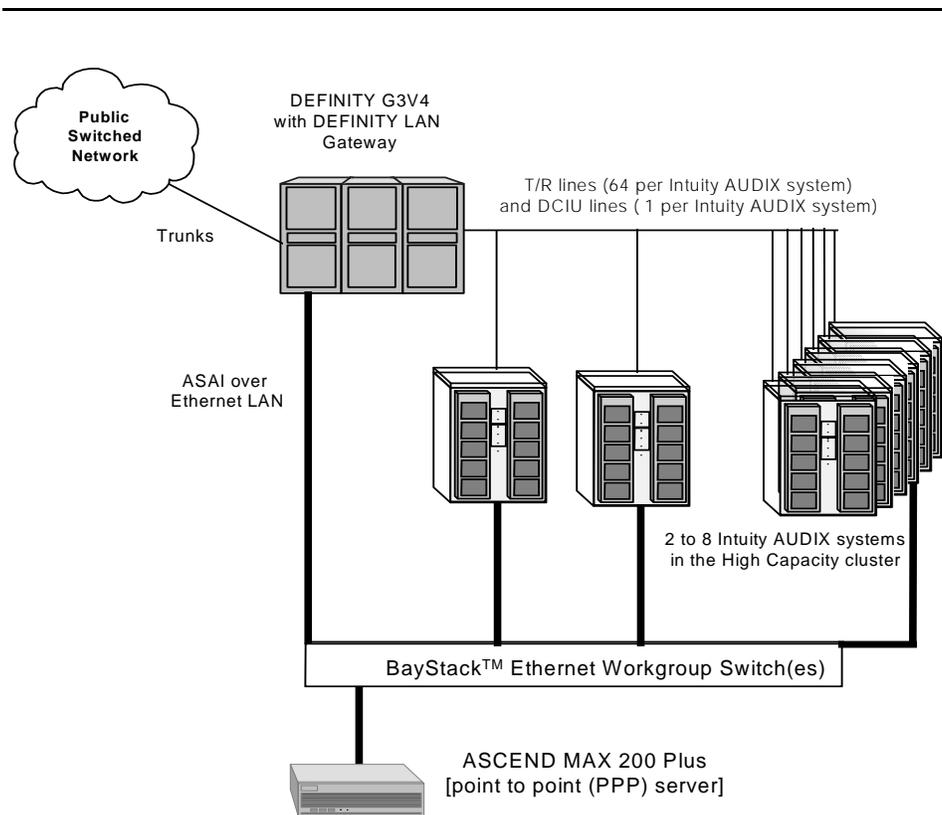

**Figure 1-1. INTUITY AUDIX High Capacity Configuration**

The INTUITY AUDIX High Capacity Option configuration also contains a BayStack Ethernet Workgroup Switch used as a HUB to provide communication between the devices on the LAN. The ASCEND MAX 200 Plus point to point protocol (PPP) server is used provide remote access for maintenance personnel to the LAN.

## **INTUITY AUDIX High Capacity Option Features**

The INTUITY AUDIX High Capacity Option provides the following features:

- Increase of system capacity
- Single-number access
- Enhanced availability
- Scalability
- Emergency call answer
- Administration access via the LAN
- Support for switches connected in a Distributed Communications Systems (DCS)
- Caller information

The features available with the INTUITY AUDIX High Capacity Option are explained below.

### **System Capacity**

The INTUITY AUDIX High Capacity Option provides an increase in the number of ports available. It increases the capacity from 64 ports to 512 ports. It also increases the number of storage hours from 1,250 hours to 10,000.

### **Single Number Access**

The adjunct system provides the call routing between INTUITY AUDIX systems using the High Capacity Option. A subscriber uses a single system-wide number to access his mailbox, regardless of the message server on which his mailbox actually resides, instead of having to remember separate numbers for each of the INTUITY AUDIX servers. When calling from his own telephone, the call is automatically routed to his home INTUITY AUDIX system. When calling from anywhere else, the call may need to be transferred to his home INTUITY AUDIX system after he has entered the required extension and password.

If a subscriber is routed to the incorrect message server, when attempting to login to his mailbox, the Login Module of High Capacity will automatically transfer him to the appropriate message server.

#### **⇒ NOTE:**

Message Manager subscribers will need to know which INTUITY AUDIX server to directly connect to for client access.

## Enhanced Availability

The High Capacity cluster includes support of primary and secondary routing adjunct systems that reside on separate INTUITY AUDIX message servers. If the primary adjunct system does not respond or operate (for example, because the server is down), the secondary adjunct system automatically controls the routing function.

### **NOTE:**

Manual intervention is required to switch the secondary system back to the primary system when the primary system has recovered.

In addition, the High Capacity cluster provides increased call answer availability. A backup message server is automatically enabled to accept a call answer message if the subscriber's home message server is down. See "Emergency Call Answer" below.

## Scalability

Scalability within the High Capacity Option provides the customer with:

- Enhanced system capabilities
- Enhanced subscriber capabilities
- Seamless growth of additional INTUITY AUDIX systems into the High Capacity configuration

A High Capacity cluster is made up of two to eight Multi-Application Platform model 100 (MAP/100) systems. All voice ports and hours of storage on existing systems apply to the High Capacity option. Using the maximum of eight INTUITY AUDIX systems in the High Capacity cluster provides 492 voice ports and 10,000 hours of message storage.

### **NOTE:**

The maximum number of subscribers on a single INTUITY AUDIX system is 20,000. Using a maximum of eight INTUITY AUDIX systems in the High Capacity cluster, you could have a total of 150,000 subscribers.

## Emergency Call Answer

Emergency call answer provides call coverage for a subscriber when an INTUITY AUDIX system within the High Capacity cluster is unavailable. Call answer is automatically switched to another INTUITY AUDIX system in the cluster. Call answer coverage is provided for subscribers on the affected INTUITY AUDIX system. When the affected INTUITY AUDIX system is again available, messages received during the downtime are transmitted from the covering system.

### NOTE:

When Emergency Call Answer is invoked, the caller hears following INTUITY AUDIX message:

**“Your call is being answered by AUDIX. <voice name> <extension xxxxx> is not available. To leave a message that will be delivered as soon as possible, record at the tone.”**

## Emergency Call Answer Limitations

Emergency call answer limitations exist because information about the receiving subscriber is not available at the time the call is handled by the emergency call answer module. As a result, default parameters must be used for that subscriber.

The following limitations apply to emergency call-answer for the INTUITY AUDIX High Capacity Option:

- Fax is not supported. It is not known if the subscriber has the fax feature at the time the message is recorded on the back-up INTUITY AUDIX system.
- The backup message server does not know if a subscriber has call answer on or is enabled for call answer as a feature. As a result, a subscriber always receives an emergency call answer message.
- A subscriber's mailbox may be full. This may cause a delay in delivering a message until space becomes available in the subscriber's mailbox.
- The backup message server uses the standard network-wide maximum message length of 120 seconds.
- When the emergency call answer message is deposited in the subscriber's mailbox, it is marked as a networked message from a mailbox with the voiced name “Call Answer Agent” instead of a call answer message. The message is also marked with the date and time that it was delivered to the subscriber mailbox, not the time at which the message was received by the emergency call answer mailbox.
- Transfer permissions only include “Enhanced no 0” to allow transfers within the DEFINITY's dial plan. There is no 0 coverage.
- Some playback control features may not be enabled (speed up, slow down, etc.) during the recording of the message.
- Only U.S. English prompts are provided.
- A default system greeting is used.

- Automated-attendant and bulletin board mailboxes will be treated as other mailboxes.

To avoid this, create the same automated-attendant or bulletin board mailbox, with the same extension on all systems. The automated-attendant or bulletin board mailbox will then function in emergency call answer mode.

- The emergency call answer message recipient cannot send a reply to the caller.
- The return call feature is unavailable to the emergency call answer message recipient.

### **Administration Access via the LAN**

The INTUITY AUDIX High Capacity Option provides administration access via the LAN to the INTUITY AUDIX systems in the High Capacity cluster through a single personal computer (PC). This feature allows a system administrator to access multiple INTUITY AUDIX systems through a PC that is running a standard terminal emulator software package. The PC with the terminal emulator software is connected to each of the INTUITY AUDIX systems via the TCP/IP LAN. Separate telnet sessions are used to log into each INTUITY AUDIX system from the PC.

We recommend the Terranova LAN Terminal Emulation running a 4410 emulator on Microsoft Windows for Workgroups 3.1. However, any other comparable terminal emulator package may be used.

#### **⇒ NOTE:**

Keyboard mappings for a terminal emulator package may differ depending on the terminal emulator package used. See the documentation provided with the package for specific keyboard mappings.

### **Support for Switches Connected in a Distributed Communications System (DCS)**

The DCS network feature on Lucent switches allows multiple switches to work together as one switch. The High Capacity Option supports DCS configurations. DCS allows an INTUITY AUDIX system to integrate with up to 20 switches. However, in the High Capacity Option configuration, all the INTUITY AUDIX message servers must be connected to a single switch in the DCS network. The DEFINITY LAN Gateway must be installed on the DEFINITY to which the INTUITY AUDIX message servers are connected.

If you use High Capacity within a DCS configuration, 10-digit call information is only received for subscribers whose telephone is connected to the switch associated with INTUITY AUDIX High Capacity message servers. Subscribers on all other switches in the DCS configuration do not receive call information.

### **Caller Information**

If a customer configuration supports the receipt of 10-digit caller identification/automatic number identification (ANI) information for subscribers, INTUITY AUDIX High Capacity Option allows the receipt of the 10-digit caller information in the message header. This caller information is played to the subscriber as part of the message header. If your telephone has display capabilities, the High Capacity Option captures this information for the call answer message. If Expert Agent Selection (EAS) is enabled, 10-digit caller information will not be available for calls which have been transferred to AUDIX using the "Transfer to AUDIX" feature access code.

See "Support for DCS Configurations" above for limitations of 10-digit caller information in a DCS configuration.

### **High Capacity Option Auto-Attendant Features**

---

The INTUITY AUDIX High Capacity Option auto-attendant provides the following features:

- Networking power
- Mailbox integration
- Multi-level user interface
- Routing

The features available with the INTUITY AUDIX High Capacity Option auto-attendant are explained below.

#### **Networking Power**

Callers can transverse the menu and leave messages in mailboxes that may be on a local or remote networked server. You can program the destination or let the caller select using the menu. For example, you could have the call deposited in a different mailbox based on the caller's Zip Code.

#### **Mailbox Integration**

Callers can use other mailbox messaging features, such as directory access or dial-by-name, to transfer.

#### **Multi-level User Interface**

Easy-to-use administration allows you to create any number of menu trees, each with multiple levels. Transitions between the levels are seamless and global navigational controls let callers easily transverse the menu tree.

Menu trees can be set up based on your environment; different user interfaces can be presented to the caller based on business hours, day/night schedules and holidays.

## **Routing**

For more efficient utilization of ports, the multimedia auto-attendant shares ports with messaging on the INTUITY AUDIX server. The dialed number identification service (DNIS) determines which application gets activated.

## **Hardware Requirements**

---

The following describes the INTUITY AUDIX High Capacity Option cluster hardware requirements:

- DEFINITY Generic 3R Version 4.0 (or later) with the DEFINITY LAN Gateway
- A LAN board must be installed on each INTUITY AUDIX (with LAN connectivity) in the cluster
- Two to eight MAP/100s with INTUITY Release 3.0 or higher
- BayStack Ethernet Workgroup Switch (a dedicated LAN segment with a switched Ethernet hub)
- ASCEND MAX 200 Plus [point to point protocol (PPP) server]

## **Software Requirements**

---

The following describes the INTUITY AUDIX High Capacity cluster software requirements:

- Lucent INTUITY System Release 3.0 or later software on all MAP/100s in the cluster
- INTUITY AUDIX High Capacity Application software on all systems in the cluster
- High Capacity Remote Field Update (if necessary)

## **Comparing INTUITY AUDIX and INTUITY AUDIX with the High Capacity Option**

---

The following describes the limitations of an INTUITY AUDIX system with the High Capacity Option as compared to an INTUITY AUDIX system without the High Capacity Option:

- If Expert Agent Selection (EAS) is enabled on the DEFINITY G3, the messaging vector cannot be used to send calls to AUDIX from a vector. A “phantom” extension, whose coverage path points to AUDIX, should be created and the call routed to that extension.

For example, to send a call to AUDIX, create a phantom extension, **10000**, with a coverage path to **AUDIX** and use the following vector:  
`route-to number 10000 with covy, if unconditional.`

The cause of this limitation is a feature interaction between EAS and ASAI. ASAI is used by the primary and secondary adjunct systems to monitor the INTUITY AUDIX hunt groups. With EAS enabled, ASAI cannot monitor the hunt group. Instead, a VDN in front of the hunt group will be monitored. Thus, all calls must pass through the VDN before reaching AUDIX to be detectable by ASAI. The messaging vector sends the call directly to the hunt group, bypassing the VDN.

### **NOTE:**

This feature interaction will be eliminated in a future switch release.

- Customizing the AUDIX voice prompts heard during the login and call-answer portions of the user interface is limited. Only changes to the “Welcome to AUDIX...” and “Your call is being answered by AUDIX...” prompts made prior to the installation of the High Capacity Option software will take effect.
- An INTUITY AUDIX system with the High Capacity Option only supports US-English.
- After entering their AUDIX login password, users cannot type ahead using touch tones to access AUDIX until after hearing their voice prompt. For example, a user can not program a speed-dial button on their telephone to type their login password and the touch-tone digit 2 to get their messages.
- Mailing lists cannot be shared between INTUITY AUDIX systems.
- Broadcast messages cannot be sent across INTUITY AUDIX systems.
- The High Capacity Option auto-attendant is an overlay feature administered as a user rather than a defined mailbox. For more information on INTUITY AUDIX auto-attendant, see *INTUITY AUDIX Release 3.3 Administration and Feature Operations*, 585-310-552 or *Lucent INTUITY™ Messaging Solutions Release 4 Administration*, 585-310-564. For more information on High Capacity Option auto-attendant, see “High Capacity Auto-Attendant” in Chapter 3, “High Capacity Option Administration”.

## **High Capacity Option Call Flows**

---

The following describes the call flows for High Capacity Option call-answer and mailbox access.

### **Call Answer**

---

The following is a summary of the call flow for a call intended for an INTUITY AUDIX High Capacity Option subscriber.

1. The caller dials the subscriber's telephone number. The subscriber is unavailable so the call goes to coverage.
2. The DEFINITY G3 executes the coverage path for the subscriber's extension. The coverage path contains a vector directory number (VDN) which has been programmed to route the call to the subscriber's home INTUITY AUDIX system. If the subscriber's home INTUITY AUDIX is unavailable, the vector routes the call to one of the remaining INTUITY AUDIX systems in the cluster.
3. The INTUITY AUDIX designated as the adjunct system constantly monitors the hunt groups on the INTUITY AUDIX systems in the High Capacity cluster. The adjunct system receives the call information from the DEFINITY and an alerting (ringing) event that contains the chosen hunt group member.
4. The adjunct system sends the 10-digit call information to the chosen INTUITY AUDIX system over the LAN.
5. Call information (such as called and calling extension information) arrives on the data communications interface unit (DCIU) link.
6. AUDIX answers the call in call answer mode since call type was "no answer."

**⇒ NOTE:**

If the subscriber's INTUITY AUDIX system is down when the call is received, the vector routes the call to another INTUITY AUDIX system. In this case, the INTUITY AUDIX system that actually receives the call invokes Emergency Call Answer since the call is for a remote subscriber.

### **Mailbox Access**

---

The following is a summary of the call flow for an INTUITY AUDIX High Capacity subscriber to access his mailbox.

**⇒ NOTE:**

This call flow uses the terms INTUITY AUDIX A, B, and C to differentiate between different systems.

If the subscriber is calling from his own telephone:

1. The subscriber dials the mailbox access VDN.
2. The mailbox access number, a VDN in the DEFINITY G3 switch, sends a route request to the INTUITY AUDIX system designated as the primary adjunct system (INTUITY AUDIX A). This route request contains the calling number.
3. The adjunct system maps the calling number to the appropriate INTUITY AUDIX system (for example, INTUITY AUDIX B) by using the AUDIX subscriber database and sends a route select message to the DEFINITY switch. The route select message directs the DEFINITY switch to send the call to the hunt group number for the INTUITY AUDIX B system.
4. The DEFINITY switch routes the call to the hunt group for the INTUITY AUDIX B.
5. The INTUITY AUDIX designated as the primary adjunct system (INTUITY AUDIX A) constantly monitors the hunt groups on the INTUITY AUDIX systems in the High Capacity cluster. The primary adjunct system receives the call information from the DEFINITY switch and an alerting (ringing) event that contains the chosen hunt group member.
6. The primary adjunct system sends the 10-digit call information to the INTUITY AUDIX B system over the LAN.
7. Call information (such as called and calling extension information) arrives on the DCIU link.
8. The INTUITY AUDIX system answers the call in mailbox access mode since call type was "direct."
9. The subscriber enters the login and password.

If the subscriber is not calling from his own telephone:

1. The subscriber dials the mailbox access VDN.
2. The mailbox access number, a VDN in the DEFINITY G3, sends a route request to the INTUITY AUDIX system designated as the primary adjunct system (INTUITY AUDIX A). This route request contains the calling number.
3. The primary adjunct system maps the calling number to the appropriate INTUITY AUDIX system (for example, INTUITY AUDIX B) by using the AUDIX subscriber database and sends a route select message to the DEFINITY switch. The route select message directs the DEFINITY switch to send the call to the hunt group number for the INTUITY AUDIX B system.
4. The DEFINITY switch routes the call to the hunt group for the INTUITY AUDIX B.
5. The INTUITY AUDIX designated as the primary adjunct system (INTUITY AUDIX A) constantly monitors the hunt groups on the INTUITY AUDIX systems in the High Capacity cluster. The primary adjunct system receives the call information from the DEFINITY switch and an alerting (ringing) event that contains the chosen hunt group member.

6. The primary adjunct system sends the 10-digit call information to the INTUITY AUDIX B system over the LAN.
7. Call information (such as called and calling extension information) arrives on the DCIU link.
8. The INTUITY AUDIX system answers the call in mailbox access mode since call type was "direct."
9. The subscriber enters the login and password.
10. After collecting the login and password, INTUITY AUDIX B determines that the subscriber's mailbox is located on another INTUITY AUDIX system (for example, INTUITY AUDIX C).
11. The INTUITY AUDIX B system uses the Lucent INTUITY Messaging Application Programming Interface (IMAPI) to validate the login and password on the INTUITY AUDIX C. If this login and password is invalid, the login module requests a re-entry.
12. After the password is validated, the login on INTUITY AUDIX B requests the primary adjunct system (on INTUITY AUDIX A) to transfer the call to INTUITY AUDIX C.
13. The primary adjunct system requests the DEFINITY switch to transfer the call to INTUITY AUDIX C and provide the call information.
14. The subscriber hears ringing during the call transfer.

**⇒ NOTE:**

If the primary adjunct system is down, the DCIU link is used to make the call transfer. In this degraded mode, the subscriber is reprompted for his login and password after being transferred.

15. The primary adjunct system constantly monitors the hunt group on INTUITY AUDIX C. The adjunct system receives the 10-digit call information from the DEFINITY switch and an alerting (ringing) event that contains the chosen hunt group member.
16. The primary adjunct system sends the call information (10-digit caller/called information) over the LAN to the chosen INTUITY AUDIX system.
17. Call information (caller/called extension information) arrives on the DCIU link.
18. The call is answered with the voiced name and greeting that is normally heard after entering the extension and password.

---

## **High Capacity Option Administration Planning**

# 2

---

### **What's in This Chapter?**

---

This chapter provides tables to record information required during administration of the INTUITY™ AUDIX® High Capacity Option. This information applies to DEFINITY® G3, DEFINITY local area network (LAN) Gateway, and INTUITY AUDIX system administration.

### **High Capacity Option Administration Planning**

---

The following procedures are used to record information for the administration of the INTUITY AUDIX High Capacity Option.

1. Use Table 2-1 to record the Internet Protocol (IP) addresses for each INTUITY AUDIX system and DEFINITY LAN Gateway in the High Capacity Option cluster.

**Table 2-1. IP Addresses**

<b>System</b>	<b>IP Address</b>
Primary adjunct	
Secondary adjunct	
#3	
#4	
#5	
#6	
#7	
#8	
DEFINITY LAN Gateway	

- Use Table 2-2 to record the hunt group number for each INTUITY AUDIX system in the High Capacity Option cluster using the **list hunt group** command on the DEFINITY system.

**Table 2-2. Hunt Group Number**

<b>System</b>	<b>Hunt Group Number</b>
Primary adjunct	
Secondary adjunct	
#3	
#4	
#5	
#6	
#7	
#8	

3. Use Table 2-3 to record the INTUITY AUDIX system and its vector numbers and mailbox access vector directory numbers (VDN). Determine the current vector numbers using the **list vector** command on the DEFINITY system. Determine the VDNs using the **list VDN** command on the DEFINITY system.

**Table 2-3. Vector Numbers**

<b>System</b>	<b>Vector Number</b>	<b>VDNs</b>
Primary adjunct		
Secondary adjunct		
#3		
#4		
#5		
#6		
#7		
#8		
Mailbox access VDN		

4. Determine whether Expert Agent Selection (EAS) is enabled using the **change system-parameter features** command on the DEFINITY system to check the call center system parameters.



---

## High Capacity Option Administration

# 3

---

### What's in This Chapter?

This chapter provides administration information for the DEFINITY® local area network (LAN) Gateway, the DEFINITY G3, and the INTUITY™ AUDIX® system that is specific to the INTUITY AUDIX High Capacity Option. It is expected that the information required to complete the procedures in this chapter will be designed by Lucent Technologies Design Engineering and the procedures in this chapter will be performed by the Lucent Technologies Professional Services organization. These procedures will be performed upon completion of hardware and software installation.

**⇒ NOTE:**

For High Capacity Option auto-attendant, administration is performed by the customer.

### DEFINITY LAN Gateway Administration

The following administration is required on the DEFINITY LAN Gateway. The information provided in this section assumes that the DEFINITY LAN Gateway has been installed and initially administered. It provides only those options that must be set for the INTUITY AUDIX High Capacity Option. See *Lucent DEFINITY® Communications System Generic 3 Installation, Administration, and Maintenance of CallVisor® ASA1 over the DEFINITY LAN Gateway*, 555-230-223, for complete details.

## Assigning a Host Name and IP Address to the DEFINITY LAN Gateway

---

In order for the DEFINITY LAN Gateway to recognize the INTUITY AUDIX systems that have the adjunct system installed, you must assign a host name and IP address.

To assign a host table and IP Address to the DEFINITY LAN Gateway, do the following:

1. Log into the DEFINITY system.

The system displays the DEFINITY LAN Gateway Main menu (Figure 3-1).

---

```
Release 1.0, Issue 1.0

                                Main Menu

1. Login/Password Administration
2. TCP/IP Administration...
3. Brouter Administration
4. Maintenance...
5. Port Status/Control
6. Exit

view/add/delete user logins or modify passwords
```

---

**Figure 3-1. DEFINITY LAN Gateway Main Menu**

2. Select:

```
> 2. TCP/IP Administration
> This Host
```

The system displays the TCP/IP Administration This Host screen (Figure 3-2).

```

TCP/IP Administration
      This Host

Host Name:      lzasail
Host IP Address: 135.24.92.97
Subnet Mask:    255.255.0.0

specify the host name of this machine

```

---

**Figure 3-2. TCP/IP Administration This Host Screen**

3. Complete the form for the DEFINITY LAN Gateway using the information below, using the **(TAB)** key between fields.
  - a. Type the host name. The maximum field size is 20 characters.
  - b. Type the IP address of the DEFINITY LAN Gateway. The maximum field size is 15 characters.
  - c. Optionally, type the subnet mask. The is used only if alternate network subnetting is desired. The value should be entered as x.x.x., where x is a number between 0 and 255. The maximum field size is 15 numbers.
4. Press **(F3)** (ENTER) to submit the data.
5. Press **(F1)** (CANCEL) to return to the TCP/IP Administration menu.



3. Complete the form for primary adjunct system using the information below, using the **(TAB)** key to move between fields.
  - a. Type the IP Address of the adjunct system. The maximum field size is 15 characters.
  - b. Type the host name of the adjunct system. The maximum field size is 20 characters.
4. Press **(F3)** (ENTER) to submit the data.
5. Repeat this procedure for the INTUITY AUDIX system designated as the secondary adjunct system.
6. Press **(F1)** (CANCEL) twice to return to the DEFINITY LAN Gateway Main menu.

### **Adding a Client Link**

The Brouter Administration screen in the DEFINITY LAN Gateway software displays all the ASAI links currently being used by the DEFINITY. You must have two client links available for High Capacity Option administration, one each for the systems designated as the primary and secondary adjunct systems. A maximum of eight links are available.

To add a client link, do the following:

1. Start at the DEFINITY LAN Gateway Main Menu (Figure 3-1) and select

> 3. Brouter Administration...

The system displays the Brouter Administration screen (Figure 3-4).

Brouter Administration			
Port	Client Name or IP Address	Client Link	Client Status
<u>2</u>	<u>lzccs4</u>	<u>1</u>	<u>in use</u>
<u>3</u>	<u>lzintuit8</u>	<u>1</u>	<u>in use</u>
<u>4</u>	<u>lzccs6</u>	<u>1</u>	<u>in use</u>
<u>5</u>	<u>lzccs15</u>	<u>1</u>	<u>in use</u>
<u>6</u>	<u>lzintuit7</u>	<u>1</u>	<u>in use</u>
—	—	—	—
—	—	—	—
—	—	—	—

Press DELETE to delete this entry or ADD to add a new entry

---

**Figure 3-4. Brouter Administration Screen**

2. Press **F3** (ADD).

The system displays the Brouter Administration Add Client screen (Figure 3-5).

---

Brouter Administration Add Client		
Port	Client Name or IP Address	Client Link
—	_____	—

port number used on the DEFINITY switch - range is 1-12

---

**Figure 3-5. Brouter Administration Add Client Screen**

3. Complete the form for the primary adjunct system using the information below, using the **(TAB)** key between fields.
  - a. Enter the next available port number in the **Port** field.
  - b. Enter the host name of the adjunct system in the **Client Name or IP Address** field.
  - c. Enter **1** in the **Client Link** field.
4. Press **(F3)** (ENTER) to submit the data.
5. Repeat Steps 3 and 4 for the secondary adjunct system.
6. Press **(F1)** (CANCEL) twice to return to the DEFINITY LAN Gateway Main menu.

## Checking the ASAI Link

To check the ASAI link, do the following.

**⇒ NOTE:**

INTUITY AUDIX High Capacity Application software must be installed and administered on the INTUITY AUDIX systems to perform this procedure.

1. Start at the DEFINITY LAN Gateway Main Menu (Figure 3-1) and select

```

> 5. Port Status/Control
    
```

The system displays the Port Status/Control screen (Figure 3-6).

Port Status/Control						
Port	DEFINITY Port State	TCP/IP Connection State	Router Service State	Messages to DEFINITY	Messages from DEFINITY	Message Period (minutes)
2	CONNECTED	ESTABLISHED	in service	20	17	30
3	CONNECTED	ESTABLISHED	in service	21	19	30
4	CONNECTED	ESTABLISHED	in service	14	20	30
5	CONNECTED	ESTABLISHED	in service	15	15	30
6	CONNECTED	ESTABLISHED	in service	15	15	30
—	—	—	—	—	—	—
—	—	—	—	—	—	—
—	—	—	—	—	—	—

Press STATE, DROP, or MSGPER to effect this entry

**Figure 3-6. Port Status/Control Screen**

2. Verify the following values for the port numbers that correspond to the two INTUITY AUDIX systems for which you just added a client link.
  - DEFINITY Port State field is **CONNECTED**
  - TCP/IP Connection State field is **ESTABLISHED**
  - Router Service State field is **in service**
3. Press (F7) (CANCEL) twice to return to the DEFINITY LAN Gateway main menu.

## DEFINITY G3 Administration

The procedures to administer the ASAI link between the DEFINITY G3 switch and the INTUITY AUDIX systems for the High Capacity option are detailed in this section.

### Verifying ASAI Feature Settings

Use the following procedure to verify that the DEFINITY optional features are turned on for the High Capacity option.

1. Login using the **craft** or **inads** user ID.
2. Enter the appropriate password.
3. Enter the correct terminal type.
4. At the command prompt, enter  
**display system-parameters customer-options**

The system displays the Optional Features Screen, Page 1 (Figure 3-7).

```

display system-parameters customer-options                               Page 1 of 2
                                OPTIONAL FEATURES

                                G3 Version: U4                          Maximum Ports: 10000
                                Logged-In ACD Agents: 5200

                                Abbreviated Dialing Enhanced List? n    Call Work Codes? n
                                A/D Grp/Sys List Dialing Start at 01? n    CAS Branch? n
                                                ACD? y                      CAS Main? n
                                AT&T Adjunct Links? y                    DCS (Basic)? y
                                Answer Supervision by Call Classifier? n  DCS Call Coverage? y
                                                ARS? y                    DTMF Feedback Signals For URU? n
                                ARS/AAR Partitioning? y                  Emergency Access to Attendant? y
                                                ASAI Interface? n        Expert Agent Selection (EAS)? y
                                                ATMS? n                      External Device Alarm Admin? n
                                Audible Message Waiting? n                Flexible Billing? n
                                Authorization Codes? n                    Forced ACD Calls? n
                                                BCMS (Basic)? y            Forced Entry of Account Codes? n
                                BCMS/UuStats LoginIDs? y                  Hospitality (Basic)? y
                                BCMS/UuStats Service Level? n            G3U3 Hospitality Enhancements? y

                                (NOTE: You must logoff & login to effect the permission changes.)

```

**Figure 3-7. Optional Features Screen, Page 1**

5. Verify the value of the field **AT&T Adjunct Links?** is set to **y**.
6. Verify the value of the field **Forced ACD Calls?** is set to **y**.
7. Press **(F7)** (NEXT PAGE).

The system displays the Optional Features, Page 2 screen (Figure 3-8).

```

display system-parameters customer-options Page 2 of 2
OPTIONAL FEATURES

Hospitality Parameter Reduction? n      Service Observing (UDNs)? n
ISDN-PRI? y                             Station and Trunk MSP? n
                                         Tenant Partitioning? n
Lookahead Interflow (LAI)? y           Terminal Trans. Init. (TTI)? n
Malicious Call Trace? y                Time of Day Routing? y
Multifrequency Signaling? y            Uniform Dialing Plan? y
Multiple Call Handling (On Request)? n   Vectoring (Basic)? y
Multiple Call Handling (Forced)? n      Vectoring (Prompting)? y
PASTE (Display PBX Data on Phone)? n   Vectoring (G3U4 Enhanced)? y
PNC Duplication? n                     Vectoring (ANI/II-Digits Routing)? n
                                         Vectoring (G3U4 Advanced Routing)? n
Processor and System MSP? n            UDN of Origin Announcement? n
Private Networking? y                  UDN Return Destination? n
Restrict Call Forward Off Net? y
Secondary Data Module? y                UuStats? n
Service Observing (Basic)? y           UuStats (G3U4 Enhanced)? n
Service Observing (Remote/By FAC)? n   Wideband Switching? n

(NOTE: You must logoff & login to effect the permission changes.)

```

**Figure 3-8. Optional Features Screen, Page 2**

8. Verify the value of the field `Vectoring (Basic)?` is set to **y**.
9. If either of these fields is not correct, contact the your next level of support. These fields must be turned on by DEFINITY group with a designated password.
10. Press **(F7)** (CANCEL) to return to the command prompt.

### Verifying the Number of ASAI/Adjunct Link Stations

The DEFINITY only supports up to eight ASAI and/or adjunct links. The High Capacity option uses two of these links, one each for the INTUITY AUDIX systems designated as the primary and secondary adjunct systems. Use the following procedure to verify that there are sufficient links for the High Capacity option.

1. Enter **list station type ASAI** at the command prompt.

The system displays the List Station Type ASAI screen (Figure 3-9).

```
list station type ASAI

                                STATIONS
Ext  Port  Type  Name          Room      Data  Cu  COR/
Ext  Pth  COS Cable Jack

Command successfully completed
```

---

**Figure 3-9. List Station Type ASAI Screen**

2. Record the number of ASAI links that are displayed.
3. Press **(F1)** (CANCEL) to return to the command prompt.
4. Enter **list station type ADJLK** at the command prompt.

The system displays the List Station Type ADJLK screen (Figure 3-10).

```
list station type ADJLK

                                STATIONS

Ext  Port  Type  Name          Room      Data  Cu  COR/
Ext  Pth   COS  Cable Jack
-----
55005 0101903 ADJLK  1z1eo1 ASAI
55007 0101902 ADJLK  1z1eo2 asai

                                Command successfully completed
```

**Figure 3-10. List Station Type ADJLK Screen**

5. Record the number of adjunct links (ADJLK) that are displayed.
6. Add the two numbers together. They must not exceed a total of six. Two links must be available for the High Capacity option.
7. Press **[F7]** (CANCEL) to return to the command prompt.

### **Adding a Station for the Primary and Secondary Adjunct Systems**

Before adding a station, you must determine the extension that is going to be used for the DEFINITY LAN Gateway connection to the DEFINITY for the primary and secondary adjunct system.

**⇒ NOTE:**

This procedure must be performed for the INTUITY AUDIX systems designated as the primary and secondary adjunct systems.

1. Enter **add station <extension>** at the command prompt.

**⇒ NOTE:**

<extension> is an unused extension on the dial plan.

The system displays the Add Station screen (Figure 3-11).

```

add station 54013                                     Page 1 of 3
STATION
Extension: 54013      BCC: 0      TN: 1
Type: 7406D          Lock Messages? n      COR: 1
Port:                Security Code:      COS: 1
Name:                Coverage Path:
FEATURE OPTIONS
LWC Reception: spe      Auto Select Any Idle Appearance? n
LWC Activation? y      Coverage Msg Retrieval? y
CDR Privacy? n          Auto Answer: none
Redirect Notification? y      Data Restriction? n
Per Button Ring Control? n    Idle Appearance Preference? n
Bridged Call Alerting? n      Personalized Ringing Pattern: 1
Active Station Ringing: single  Restrict Last Appearance? y
Data Module? n
Display Module? n
AUDIX Name:
Messaging Server Name:
Message Lamp Ext: 54013      Disp Client Redir? n
Select Last Used Appearance? n
    
```

**Figure 3-11. Add Station Screen**

2. Enter the values for the fields on the primary adjunct system as shown in Table 3-1.

**Table 3-1. Add Station Screen Field Descriptions**

Field	Value
Type	ADJLK
Port	Port number used for the <extension>  For example, the value 010C0103 identifies in two-digit increments the cabinet, carrier, slot, and port on the DEFINITY. The cabinet and carrier slot must correspond to the fourth slot occupied by the DEFINITY LAN Gateway (that is, the slot occupied by TN2208). The port entry must correspond to the port number on the Brouter Administration screen in the DEFINITY LAN Gateway main menu.
Name	INTUITY AUDIX system name of the primary (or secondary) adjunct system   <b>NOTE:</b> This field is for informational purposes only.
CRV Length	2

3. Press **␣** (ENTER) to enter the changes.
4. Repeat Steps 2 and 3 for the secondary adjunct system.
5. Press **␣** (CANCEL) to return to the command prompt.

### Creating a Vector for an INTUITY AUDIX System

To create a vector for each INTUITY AUDIX system, do the following:

**⇒ NOTE:**

This procedure assumes that all the INTUITY AUDIX systems are installed and that you know the hunt group number for each INTUITY AUDIX system. You must perform this procedure for each INTUITY AUDIX system in the High Capacity Option cluster.

1. Enter **change vector <x>** at the command prompt.

**⇒ NOTE:**

<x> is the vector number you selected from the list of unused vectors in Chapter 2, "High Capacity Option Administration Planning".

The system displays the Call Vector screen (Figure 3-12).

```

change vector 1                                     Page 1 of 3
                                CALL VECTOR
Number: 1                                         Name lzle011cug
Basic? y   EAS? y   G3V4 Enhanced? y   ANI/II-Digits? n   ASAI Routing? n
Prompting? y   LAI? y   G3V4 Adv Route? n
01 route-to   number 82212000   with cov n if unconditionally
02 route-to   number 63000     with cov n if unconditionally
03 route-to   number 61000     with cov n if unconditionally
04 busy
05
06
07
08
09
10
11
    
```

**Figure 3-12. Call Vector Screen**

2. Enter the name of the call vector for the INTUITY AUDIX system.

3. Enter the *hunt group extension number* on the first *route-to* line.

**⇒ NOTE:**

The *hunt group extension number* must match the hunt group extension number for the INTUITY AUDIX system that is next in the High Capacity Option numbering plan.

4. For each remaining INTUITY AUDIX system, complete a *route-to* line. The order of the *route-to* lines **must** follow the order of the INTUITY AUDIX systems. For example, INTUITY AUDIX system 5 should have INTUITY AUDIX system 6 listed as its first *route-to* line as shown below:
5. Enter **busy** on the last *route-to* line of the Call Vector screen after all INTUITY AUDIX systems have been added.

**⇒ NOTE:**

The last line number (for example, 06) depends on the number of INTUITY AUDIX systems that are in the High Capacity cluster.

6. Use the default values for all other fields.
7. Press **F3** (ENTER) to enter the changes.
8. Repeat Steps 3 through 7 for each INTUITY AUDIX system in the High Capacity Option cluster.
9. Press **F1** (CANCEL) to return to the *command* prompt.

### **Creating a Mailbox Access Vector**

Use the following procedure to create a mailbox access vector:

**⇒ NOTE:**

This procedure assumes that all the INTUITY AUDIX systems are installed and that you know the hunt group number for each INTUITY AUDIX system.

1. Enter **change vector <x>** at the *command* prompt.

**⇒ NOTE:**

<x> is a vector number that was not previously used. See Chapter 2, "High Capacity Option Administration Planning" for the vector number you selected as the mailbox access vector.

The system displays the Call Vector screen (Figure 3-13).

```

change vector 1                                     Page 1 of 3
                                CALL VECTOR
Number: 1                                           Name lzleo11cvg
Basic? y   EAS? y   G3U4 Enhanced? y   ANI/II-Digits? n   ASAI Routing? n
Prompting? y   LAI? y   G3U4 Adv Route? n

01 route-to number 82212000 with cov n if unconditionally
02 route-to number 63000 with cov n if unconditionally
03 route-to number 61000 with cov n if unconditionally
04 busy
05
06
07
08
09
10
11

```

**Figure 3-13. Call Vector Screen**

2. Enter the name of the call vector. Be sure to uniquely identify this vector as the mailbox access vector for the High Capacity Option.
3. Enter the following information:



**NOTE:**

Required entries are underlined below.

- 01 adjunct routing link <extension for primary adjunct>
- 02 wait-time 6 secs hearing silence
- 03 adjunct routing link <extension for secondary adjunct >
- 04 wait-time 6 secs hearing silence
- 05 route-to number <vdn of the vector for the primary adjunct machine>  
with cov n if unconditionally
- 06 busy

4. Press **F3** (ENTER) to enter the changes.
5. Press **F1** (CANCEL) to return to the command prompt.

## Creating VDNs

In order for the DEFINITY to access a vector, a vector directory number (VDN) must be created. A VDN must be created for *each* INTUITY AUDIX system in the High Capacity Option cluster and one VDN must be created for the mailbox access vector. To create a VDN, do the following:

1. Enter **add vdn <extension>** at the command prompt.

**NOTE:**

<extension> is the VDN extension to be associated with a vector. This extension should be an unused extension in the dial plan found on the Vector Number Worksheet in Chapter 2, "High Capacity Option Administration Planning".

The system displays the Vector Directory Number screen (Figure 3-14).

```
add vdn 54013                                     Page 1 of 1
VECTOR DIRECTORY NUMBER
Extension: 54013
Name: _____
Allow VDN Override? n
COR: 1
TN: 1
Vector Number: 1
AUDIX Name: _____
Messaging Server Name: _____
Measured: none
1st Skill: _____
2nd Skill: _____
3rd Skill: _____
```

**Figure 3-14. Vector Directory Number Screen**

2. In the **Name** field, enter the name of the INTUITY AUDIX system or the name for the mailbox access VDN.
3. In the **Vector Number** field, enter the number of the vector that corresponds to this INTUITY AUDIX system or mailbox access vector.
4. Change the **Allow VDN Override?** field to **y**.
5. Press **(F3)** (ENTER) to enter the changes.

6. Repeat Steps 2 through 5 for each VDN. There must be a VDN for each INTUITY AUDIX system and one for the mailbox access vector.
7. Press **(F7)** (CANCEL) to return to the command prompt.

## Administering Hunt Groups

A hunt group should already be created for each INTUITY AUDIX system in the High Capacity cluster. The High Capacity software requires that the **ACD** and **Queue** fields for the hunt group be turned on for each hunt group. To turn on the **ACD** and **Queue** fields, do the following:

1. See Chapter 2, "High Capacity Option Administration Planning" for the hunt group number for each INTUITY AUDIX system in the High Capacity cluster.
2. Enter **change hunt <hunt group #>** at the command prompt.



### NOTE:

<hunt group #> is the hunt group extension number for an INTUITY AUDIX system in the High Capacity cluster.

The system displays the Hunt Group screen (Figure 3-15).

```

change hunt-group 1                                     Page 1 of 2
                HUNT GROUP
Group Number: 1          Group Extension: 51600        Group Type: ucd
Group Name: lzleo2          Skill? y                ACD? y
Queue? y                  Vector? y                AAS? n
Security Code: _____ COR: 1
ISDN Caller Disp: _____ TN: 1

Measured: none          Supervisor Extension: _____

Controlling Adjunct: none

Queue Length: 64
Calls Warning Threshold: _____ Calls Warning Port: _____
Time Warning Threshold: _____ Time Warning Port: _____

Redirect on No Answer (rings): _____
Forced Entry of Stroke Counts or Call Work Codes? n
  
```

**Figure 3-15. Hunt Group Screen**

3. In the **ACD?** field, enter **y**.
4. If EAS is enabled, the **skill** and **vector** fields must be set to **y**.
5. In the **Queue?** field, enter **y**.

6. In the `Queue Length` field, enter the number of ports on the INTUITY system.
7. Press `␣` (ENTER) to enter the changes.
8. Repeat Steps 3 through 7 for each INTUITY AUDIX system hunt group.
9. Press `␣` (CANCEL) to return to the `command` prompt.

### **Defining a Coverage Path**

A coverage path defines the order in which calls are redirected to alternate answering positions. If administration is being performed for a new customer, a coverage path must be defined using VDNs. If administration is being performed for a customer with existing INTUITY AUDIX systems, you must change the coverage path from hunt group numbers to VDNs. To define a coverage path, do the following:

**⇒ NOTE:**

This procedure must be performed for each coverage path.

1. Enter **change coverage path <coverage path number>** at the `command` prompt.

**⇒ NOTE:**

<coverage path number> is the coverage path.



## **INTUITY AUDIX Administration**

---

All administration for an INTUITY AUDIX Release system is described in *INTUITY AUDIX Release 3.3 Administration and Feature Operations*, 585-310-552, or *Lucent INTUITY™ Messaging Solutions Release 4 Administration*, 585-310-564. The following procedures must be performed before proceeding with High Capacity Option administration.

### **Assign Service to a Called Number**

---

This procedure assigns service to a called number within the High Capacity Option cluster.

1. Start at the Lucent INTUITY Administration menu (Figure 3-17).

---

```
INTUITY (TM) Administration
>AUDIX Administration
  Customer/Services Administration
  High Capacity Administration
  Intro Voice Response Administration
  Networking Administration
  Switch Interface Administration
  Upgrade
  Voice System Administration
```

---

**Figure 3-17. Lucent INTUITY Administration Menu**

2. Select

```
> Voice System Administration
```

```
> Number Services
```

```
> Assign Service
```

The system displays the Assign Number Service screen (Figure 3-18).



**Figure 3-18. Assign Number Service Screen**

3. In the `Called Numbers` field, enter **any**.
4. In the `Calling Numbers` field, enter **any**.
5. In the `Service Name` field, enter **hc\_init**.
6. Press **F3** (SAVE).
7. Press **F6** (CANCEL) twice to return to the Lucent INTUITY Administration menu.

## Setting Community Sending Restrictions

---

**⇒ NOTE:**

It is strongly recommended that you set restrictions on a community specified for emergency call answer mailboxes.

These restrictions prevent the Sender Community from sending mail to the corresponding Recipient Community. That is, it prevents a subscriber from replying to a message that was received from an emergency call answer mailbox or inadvertently sending a message to an emergency call answer mailbox. Since these mailboxes are for internal system use, any messages sent to these mailboxes are lost.

To set up community restrictions, do the following:

1. Start at the Lucent INTUITY Administration menu (Figure 3-17) and select

```
> AUDIX Administration
```

2. Enter **change system-parameters sending-restrictions** at the `enter command:` prompt.

The system displays the Sending Restrictions screen (Figure 3-19).

```

l3leol           Active           Alarms: MmWA           Logins: 3
change system-parameters sending-restrictions           Page 1 of 1
SENDING RESTRICTIONS
Activate Restrictions? n

                Recipient Community
Sender          1  2  3  4  5  6  7  8  9 10 11 12 13 14 15
Community      2  -  -  -  -  -  -  -  -  -  -  -  -  -  -
               3  -  -  -  -  -  -  -  -  -  -  -  -  -  -
               4  -  -  -  -  -  -  -  -  -  -  -  -  -  -
               5  -  -  -  -  -  -  -  -  -  -  -  -  -  -
               6  -  -  -  -  -  -  -  -  -  -  -  -  -  -
               7  -  -  -  -  -  -  -  -  -  -  -  -  -  -
               8  -  -  -  -  -  -  -  -  -  -  -  -  -  -
               9  -  -  -  -  -  -  -  -  -  -  -  -  -  -
              10  -  -  -  -  -  -  -  -  -  -  -  -  -  -
              11  -  -  -  -  -  -  -  -  -  -  -  -  -  -
              12  -  -  -  -  -  -  -  -  -  -  -  -  -  -
              13  -  -  -  -  -  -  -  -  -  -  -  -  -  -
              14  -  -  -  -  -  -  -  -  -  -  -  -  -  -
              15  -  -  -  -  -  -  -  -  -  -  -  -  -  -

enter command: change system-parameters sending-restrictions

```

**Figure 3-19. Sending Restrictions Screen**

3. Enter **y** to activate the sending restrictions.
4. Select a Recipient Community 1 through 15 across the top of the screen to be used for emergency call answer mailboxes.
5. Enter **r** in the each column of Sender Community for the Recipient Community selected.

**⇒ NOTE:**

Do not choose 1 as the Sender Community as this is the system default. It is recommended that you use the Sender Community 15 for emergency call answer mailboxes

6. Press **F3** (ENTER) to save your changes.

The system returns to the `enter command:` prompt.

## Verify IMAPI Sessions

To verify the number of IMAPI sessions, do the following:

1. Enter **display system-parameters imapi-options** at the `enter command:` prompt.

The system displays the System-Parameters IMAPI-Options screen (Figure 3-20).

```
lzleol          Active          Alarms: MmWA          Logins: 3
display system-parameters imapi-options          Page 1 of 1
SYSTEM-PARAMETERS IMAPI-OPTIONS

NUMBER OF IMAPI SESSIONS

                                Total Sessions Purchased: 32
                                Maximum Simultaneous Sessions: 32
Simultaneous Sessions Available for Trusted Server Access: 0

IMAPI PARAMETERS

                                IMAPI Session Timeout (minutes): 5
                                Trusted Server Session Timeout (minutes): 5
                                Check New Messages? y
                                Deliver CA Message? y
                                Message Transfer? y

Command Successfully Completed
```

**Figure 3-20. System-Parameters IMAPI-Options Screen**

2. Verify that `Maximum Simultaneous Sessions:` is set to at least **32**.
3. If the value is not set to at least **32**, do the following:
  - a. Enter **exit** to return to the `enter command:` prompt.
  - b. Enter **change system-parameters imapi-options** at the `enter command:` prompt.
  - c. Change the `Total Sessions Purchased` field to at least **32**.

**⇒ NOTE:**

If you are unable to change the value, contact the AUDIX Upgrade and Control Center at (800) 562-8349 for assistance.

- d. Press **↵** (ENTER).
- e. Enter **exit** the `enter command:` prompt to exit the screen.

## High Capacity Administration

The High Capacity Administration component from the Lucent INTUITY Administration menu provides you the tools to administer the current adjunct system configuration. You can administer the switch adjunct system and the INTUITY AUDIX machines, and you can specify which adjunct system (primary or secondary) is in control.

**⇒ NOTE:**

Before administering High Capacity, all INTUITY systems in the High Capacity Option cluster must be functional, connected to the LAN, and have the High Capacity Option software installed. For these procedures, see *INTUITY AUDIX Release 3.3 Administration and Feature Operations*, 585-310-552 or *Lucent INTUITY™ Messaging Solutions Release 4 Administration*, 585-310-564, for installation procedures for the INTUITY AUDIX and *INTUITY AUDIX High Capacity Option Installation*, 585-310-753 for the installation procedures for the High Capacity Option.

To access the High Capacity Administration screens, do the following from the system designated as the primary adjunct system:

1. Start at the Lucent INTUITY Administration menu (Figure 3-17) and select

```
> High Capacity Administration
```

If you are accessing the High Capacity Administration screen for the first time (that is, no primary or secondary adjunct systems have been specified yet), the system displays the following message:

```
The name of the Primary Adjunct System is not currently set.
High Capacity Administration may only be done on the Primary
Adjunct system.
```

```
Is this system going to be the Primary Adjunct System? [y,n,?]
```

2. Select **y** if this system is the primary adjunct system, or **n** if this is not the primary adjunct system.

If you selected **y**, the system displays the High Capacity Administration menu (Figure 3-21).

---

```
High Capacity Administration
>High Capacity Auto Attendant Administration
Switch Adjunct Module Administration
High Capacity AUDIX Machine Administration
Switch Adjunct Module Control Menu
```

---

**Figure 3-21. High Capacity Administration Menu**

**⇒ NOTE:**

The following procedures are listed in the order which they should be performed, not in the order they appear on the High Capacity Administration menu.

### High Capacity AUDIX Machine Administration

The High Capacity AUDIX Machine Administration screen provides information about each INTUITY AUDIX system in the High Capacity Option cluster. This information includes the IP address, hunt group extension, languages, and emergency call answer information.

To administer each INTUITY AUDIX High Capacity Option system, do the following from the primary adjunct system:

1. Start at the High Capacity Administration menu (Figure 3-21) and select

```
> High Capacity AUDIX Machine Administration
```

The system displays the High Capacity AUDIX Machine Administration screen (Figure 3-22).

```

High Capacity AUDIX Machine Administration

Machine Name: _____ IP Address: _____
Hunt Group Extension: _____ UDN: _____
Primary Language: _____ Secondary Language: _____

Emergency Call Answer:

Starting Temporary Mailbox Extension: _____ Mailboxes Required: ____
Ending Temporary Mailbox Extension: _____
Community ID: __
    
```

**Figure 3-22. High Capacity AUDIX Machine Administration Screen**

2. Press **(F8)** (CHG-KEYS).
3. Press **(F1)** (ADD) to add a new INTUITY AUDIX system or press **(F2)** (CHANGE) to change information for an existing system.
4. Use Table 3-2 to enter the appropriate field values.

**Table 3-2. High Capacity AUDIX Machine Administration Screen Field Descriptions**

Field	Description	Valid Input
Machine Name	The name of the INTUITY AUDIX machine  <b>⇒ NOTE:</b> For the High Capacity Option to function correctly, this INTUITY AUDIX machine name must match the UNIX system network name.	Maximum field size of 10 alphanumeric characters
IP Address	The IP address of the INTUITY AUDIX system	Maximum of 15 digits
Hunt Group Extension	The hunt group extension for the INTUITY AUDIX system	Maximum of 6 digits

*Continued on next page*

**Table 3-2. High Capacity AUDIX Machine Administration Screen Field Descriptions — *Continued***

Field	Description	Valid Input
VDN	<p>The Vector Directory Number (VDN) for the INTUITY AUDIX system which must be monitored for the ASAI data</p> <p><b>⇒ NOTE:</b> This VDN should be the same as the call-answer VDN for the INTUITY AUDIX machine.</p>	Maximum of 6 digits
Primary Language	A protected field that identifies the primary language used on the INTUITY AUDIX system	<p>Maximum field size of 14 alphanumeric characters</p> <p><b>⇒ NOTE:</b> The default value is <b>us-eng</b> (US English)</p>
Secondary Language	A protected field that identifies the secondary language used on the INTUITY AUDIX system	<p>Maximum field size of 14 alphanumeric characters</p> <p><b>⇒ NOTE:</b> The default value is <b>us-eng</b> (US English)</p>
<b>Emergency Call Answer</b>		
Starting Temporary Mailbox Extension	<p>The starting extension for the INTUITY AUDIX system temporary mailbox.</p> <p><b>⇒ NOTE:</b> Changes to this field delete existing temporary system mailboxes and adds new mailboxes. Any undelivered messages in these mailboxes are deleted when the field value is changed.</p>	Maximum field size of 10 digits

*Continued on next page*

**Table 3-2. High Capacity AUDIX Machine Administration Screen Field Descriptions — *Continued***

<b>Field</b>	<b>Description</b>	<b>Valid Input</b>
Mailboxes Required	A read-only field that specifies the number of mailboxes required by the INTUITY AUDIX system	Maximum field size of 3 digits
Ending Temporary Mailbox Extension	A field that specifies the ending extension for the INTUITY AUDIX system temporary mailbox. This field is populated by the system.	Maximum field size of 10 digits
Community ID	The community identifier for the INTUITY AUDIX system   <b>NOTE:</b> This value must match the Sender Community value specified in the "Setting Community Sending Restrictions" earlier in this chapter.	Maximum field size of 2 digits

5. Press **F3** (SAVE) to save the values you entered.

The system displays a message indicating the changes made to the High Capacity AUDIX Machine Administration screen. In some cases, instructions (for example, restarting the voice system) are provided and must be performed before any changes take effect.

6. Press **F8** (CHG-KEYS).
7. Press **F5** (IMAPI-ON) to enable IMAPI for all subscribers on this INTUITY AUDIX system.

 **NOTE:**

For Step 7 to take effect, 32 IMAPI sessions for this machine must be enabled. See the "Verify IMAPI Sessions" procedure previously described in this chapter for more information.

8. Repeat Steps 2 through 7 on the primary adjunct system for each INTUITY AUDIX system in the High Capacity Option cluster.
9. Press **F6** (CANCEL) to exit the screen and return to the High Capacity Administration menu.

## Switch Adjunct System Administration

---

The Switch Adjunct Module Administration screen provides the mailbox access VDN, DEFINITY LAN Gateway IP address, and the machine name for the primary and secondary adjunct system.

**⇒ NOTE:**

The IP addresses supplied for the primary and secondary systems during DEFINITY LAN Gateway administration must be used in this procedure. See "Assigning a Host Name and IP Address to the DEFINITY LAN Gateway" above.

To administer the switch adjunct system, do the following:

1. Start at the High Capacity Administration menu (Figure 3-21) and select

```
> Switch Adjunct Module Administration
```

The system displays the Switch Adjunct Administration Form screen (Figure 3-23).

---

```
Switch Adjunct Administration Form
Mailbox Access VDN: 54000
Definity LAN Gateway IP Address: 135.24.92.36
Primary Adjunct Machine Name: 1z1eo1
Secondary Adjunct Machine Name: 1z1eo2
EAS Enabled on Switch: y
```

---

**Figure 3-23. Switch Adjunct Administration Form Screen**

2. Use Table 3-3 to enter the appropriate field values.

**Table 3-3. Switch Adjunct Module Administration Form Screen Field Descriptions**

<b>Field</b>	<b>Description</b>	<b>Valid Input</b>
Mailbox Access VDN	The vector directory number assigned to the mailbox access number (see Chapter 2, "High Capacity Option Administration Planning")	Maximum of 6 digits
Definity LAN Gateway IP Address	The IP address of the DEFINITY LAN Gateway	Maximum of 15 digits
Primary Adjunct Machine Name	The name of the INTUITY AUDIX system designated as the primary adjunct system; this system must have the adjunct system software installed	Alphanumeric entry, maximum of 10 digits
Secondary Adjunct Machine Name	The name of the INTUITY AUDIX system designated as the secondary adjunct system; this system must have the adjunct system software installed	Alphanumeric, maximum of 10 digits
EAS Enabled on Switch	Indicates that the Expert Agent Selection (EAS) VDN associated with the INTUITY AUDIX system is to be monitored for ASAI data.	y if enabled on switch n if not enabled on switch

3. Press **F3** (SAVE) to save the values you entered.

The system displays a message indicating the changes made to the Switch Adjunct Module Administration screen. In some cases, instructions (for example, *restarting the voice system*) are provided and must be performed before any changes take affect.

4. Press **F6** (CANCEL) to exit the screen and return to the High Capacity Administration menu.

## Switch Adjunct Module Control Menu

---

The Switch Adjunct Module Control menu allows you to switch the adjunct system control from the primary adjunct system to the secondary adjunct system. This switch must be done manually for an anticipated downtime. The High Capacity software automatically switches control to the INTUITY AUDIX system designated as the secondary adjunct system if the primary adjunct system is down.

**⇒ NOTE:**

It is not recommended that you perform a switch during system busy periods. The primary adjunct system is engineered with additional system resources to handle adjunct system responsibilities. The secondary adjunct system may not have those resources readily available.

If the primary adjunct system fails unexpectedly, the secondary adjunct system automatically assumes primary adjunct system tasks within five minutes of the failure. However, some calls received during this five minute interval may experience errors (for example, a call routed to the wrong machine).

If the secondary adjunct system automatically assumes primary adjunct system tasks because the primary adjunct system failed, an alarm is generated.

To switch control of the adjunct system, do the following:

1. Determine which adjunct system is currently in use. See *INTUITY™ AUDIX® High Capacity Option Maintenance*, 585-310-572, for the procedures.
2. Start at the High Capacity Administration menu (Figure 3-21) and select

```
> Switch Adjunct Module Control Menu
```

The system displays the Switch Adjunct Module Control menu (Figure 3-24).

---

```
Switch Adjunct Module Control  
>Failover to Secondary Adjunct Machine  
Fallback to Primary Adjunct Machine
```

---

**Figure 3-24. Switch Adjunct Module Control Menu**

3. Select one of the following:

- **Failover to Secondary Adjunct Machine** — This selection transfers responsibility for performing adjunct system tasks from the primary adjunct system to the secondary adjunct system. Use this selection during a scheduled maintenance downtime to ensure minimal disruption of calls.
- **Fallback to Primary Adjunct Machine** — This selection transfers adjunct system responsibilities from the secondary adjunct system to the primary adjunct system. The primary adjunct system will again be responsible for routing all calls, providing call information, and transferring calls between INTUITY AUDIX systems. The secondary adjunct system returns to monitoring the primary adjunct system for failure.

Use this selection after all scheduled or unscheduled downtimes of the primary adjunct system. Perform this action immediately after the primary adjunct system is back online.

**⇒ NOTE:**

The primary and secondary adjunct systems should not run in "adjunct mode" simultaneously. This causes unnecessary system load on the secondary adjunct system.

4. Press **F3** (SAVE) to save the selection made.

5. Press **F6** (CANCEL) twice to return to the Lucent INTUITY Administration menu (Figure 3-17)

## **High Capacity Auto-Attendant**

---

**⇒ NOTE:**

High Capacity auto-attendant must be set-up as a regular subscriber on the INTUITY AUDIX system and be IMAPI enabled in order for this feature to be administered.


The INTUITY AUDIX High Capacity Auto-Attendant is an "overlay" feature which provides callers with the ability to directly leave messages, without ringing the telephone, regardless of which High Capacity Option server the receiving subscriber's mailbox resides. This feature also supports a nested attendant.

The following outlines the administration steps for the High Capacity Option auto-attendant feature.


### Step 1: Assign High Capacity Option Auto-Attendant Service

To assign service for the High Capacity auto-attendant, complete the following tasks:

1. Start at the Lucent INTUITY Administration menu (Figure 3-17), and select

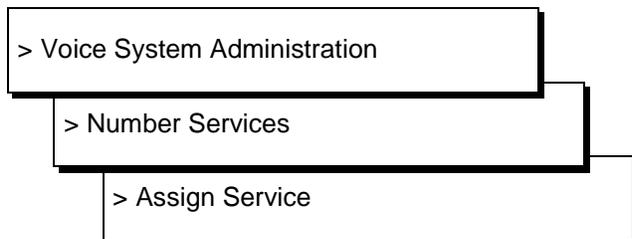

The system displays the Assign Number Service screen (Figure 3-25).

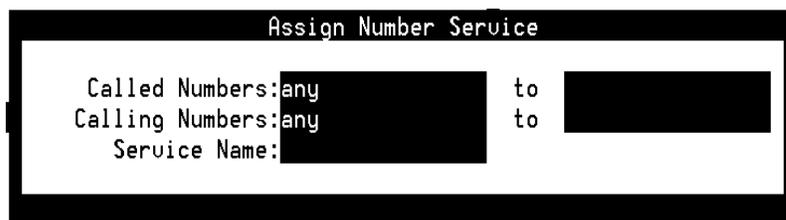

---

**Figure 3-25. Assign Number Service Screen**

2. Complete High Capacity Option auto-attendant service administration by administering the fields on the Assign Number Service screen as listed in Table 3-4.

**Table 3-4. Assign Number Service Screen Field Descriptions**

<b>Field</b>	<b>Description</b>	<b>Valid Input</b>
Called Numbers	Identifies the beginning extension number, within in a range, to be called when system activates the High Capacity auto-attendant.	This should be the number you will assign as the High Capacity auto-attendant mailbox.
to	Identifies the ending extension number, within a range, to be called when the system activates High Capacity auto-attendant.	blank
Calling Numbers	Identifies the beginning calling number, within a range, to be routed to the called number for High Capacity auto-attendant coverage.	any
to	Identifies the ending calling number, within a range, to be routed to the called number for High Capacity auto-attendant coverage.	blank
Service Name	Identifies the type of service coverage.	hc_caa

3. Press **F3** (ENTER) to save this information.
4. Press **F6** (CANCEL) three times to return to the Lucent INTUITY Administration menu (Figure 3-17).

## Step 2: Administer the Auto-Attendant as a User

To administer the auto-attendant as a user, complete the following tasks:

1. Start at the Lucent INTUITY Administration menu (Figure 3-17), and select AUDIX Administration.
2. Enter **add subscriber name/extension** at the `enter command:` prompt.



### NOTE:

**name/extension** is the auto-attendant name or telephone extension you would like to add to the system.

The system displays the Subscriber Screen, Page 1 (Figure 3-26).

```
add subscriber name                                     Page 1 of 2
                                     SUBSCRIBER
      Name: _____ Locked? n
      Extension: _____ Password: _____
      COS: class00 Miscellaneous: _____
Switch Number: _____ Covering Extension: _____
Community ID: _____ Broadcast Mailbox? _
Secondary Ext: _____

Press [ENTER] to execute or press [CANCEL] to abort
enter command: add subscriber name
```

---

**Figure 3-26. Subscriber Screen, Page 1**

3. Complete auto-attendant subscriber administration by administering the fields on the Subscriber Screen, Page 1 as listed in Table 3-5.

**Table 3-5. Subscriber Screen, Page 1 Field Descriptions**

<b>Field</b>	<b>Description</b>	<b>Valid Input</b>
Name	A touch-tone unique name for the auto-attendant.	1- to 29-alphabetic name
Locked?	The INTUITY AUDIX system allows only a specified number of unsuccessful login calls before disconnecting the subscriber. If this number is exceeded, as defined on the System Parameters Features screen, the INTUITY AUDIX system <i>locks out</i> that subscriber and prevents further system access.  This field indicates whether the user is locked out of the system.	Default is <b>n</b> y or n
Extension	Extension number associated with this auto-attendant	3- to 10-digits
Password	Password to be used to log into the auto-attendant mailbox	0- to 15-digit number
COS	Class of service name or number for this auto-attendant.	1- to 8-alpha-numeric characters or an integer from 1 to 11
Miscellaneous	Additional information about the user that may be helpful	1- to 11-alpha-numeric characters
Switch Number	Switch number on which the auto-attendant's extension is administered	An integer from 0 to 20

**⇒ NOTE:**

The Covering Extension, Community ID, Broadcast Mailbox, and Secondary Ext fields should be left blank.

4. Press **F7** (NEXT PAGE).

The system displays the Subscriber Class of Service Parameters screen (Figure 3-27).

```

add subscriber 5554                                     Page 2 of 2
                SUBSCRIBER CLASS OF SERVICE PARAMETERS
Addressing Format: extension             Login Announcement Set: System
System Multilingual is OFF             Call Answer Primary Annc. Set: System
Call Answer Language Choice? n       Call Answer Secondary Annc. Set: System

PERMISSIONS
Type: call-answer           Announcement Control? n           Outcalling? n
Priority Messages? n           Broadcast: none           IMAPI Access? n
IMAPI Message Transfer? n       Fax Creation? n           Trusted Server Access? n

INCOMING MAILBOX           Order: fifo           Category Order: nuo
Retention Times (days),   New: 10           Old: 10           Unopened: 10
OUTGOING MAILBOX           Order: fifo           Category Order: unfda
Retention Times(days), File Cab: 10   Delivered/Nondeliverable: 5

Voice Mail Message (seconds), Maximum Length: 300 Minimum Needed: 32
Call Answer Message (seconds), Maximum Length: 120 Minimum Needed: 8
End of Message Warning Time (seconds):       
Maximum Mailing Lists: 25           Total Entries in all Lists: 250
Mailbox Size (seconds), Maximum: 1200           Minimum Guarantee: 0
Press [ENTER] to execute or press [CANCEL] to abort
    
```

**Figure 3-27. Subscriber Class of Service Parameters Screen**

5. Complete auto-attendant subscriber administration by administering the fields on the Subscriber Class of Service Parameters screen as listed in Table 3-6.

**Table 3-6. Subscriber Class of Service Parameters Screen Field Descriptions**

<b>Field</b>	<b>Description</b>	<b>Valid Input</b>
Addressing Format	Indicates whether you would like callers to be able to address AUDIX messages by extension or name	extension or name
Call Answer Language Choice	Indicates whether you are using the multilingual feature or multiple personal greetings feature for the auto-attendant	y indicates the multi-lingual feature n indicates the multiple personal greetings feature
Call Answer Secondary Annc. Set	Name of the secondary language set callers will be able to select  <b>⇒ NOTE:</b> This field only applies if a second announcement set has been purchased. If you entered <b>n</b> in the Call Answer Language Choice field, leave this field at the default.	
<b>PERMISSIONS</b>		
Type	Indicates the capabilities associated with the auto-attendant	call-answer  <b>⇒ NOTE:</b> This is the only valid value for a High Capacity Option system with auto-attendant.

*Continued on next page*

**Table 3-6. Subscriber Class of Service Parameters Screen Field Descriptions**  
— *Continued*

Priority Messages?	Allows users to send priority mail messages to other High Capacity Option users.	y <b>⇒ NOTE:</b> This is the only valid value for a High Capacity Option system with auto-attendant.
IMAPI Access?	Allows access to the server for High Capacity Option users	y <b>⇒ NOTE:</b> This is the only valid value for a High Capacity Option system with auto-attendant.
IMAPI Message Transfer?	Enables the server to transfer voice, fax, file attachments, and e-mail files to a client's PC. It allows High Capacity Option users to download their AUDIX messages to their PC's.	y This is the only valid value for a High Capacity Option system with auto-attendant.

**⇒ NOTE:**

The fields not listed in Table 3-6 should be not be changed from their default values.


6. Press **F3** (ENTER) to save this information.
7. Enter **exit** to return to the Lucent INTUITY Administration menu (Figure 3-17).

### Step 3: Administer the High Capacity Option Auto-Attendant

To administer the auto-attendant as a user, complete the following tasks:

1. Start at the Lucent INTUITY Administration menu (Figure 3-17).
2. Select **High Capacity Administration**.

The system displays the High Capacity Administration menu (Figure 3-28).

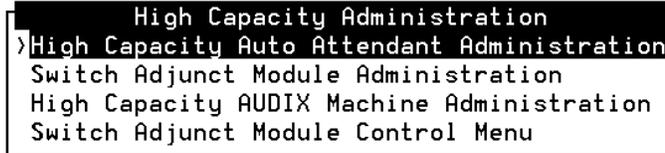

**Figure 3-28. High Capacity Administration Menu**




**NOTE:**

The system will only display the High Capacity Auto Attendant Administration menu option for non-primary adjunct machines.

3. Select High Capacity Auto Attendant Administration.

The system displays the High Capacity Auto Attendant Administration screen (Figure 3-29).

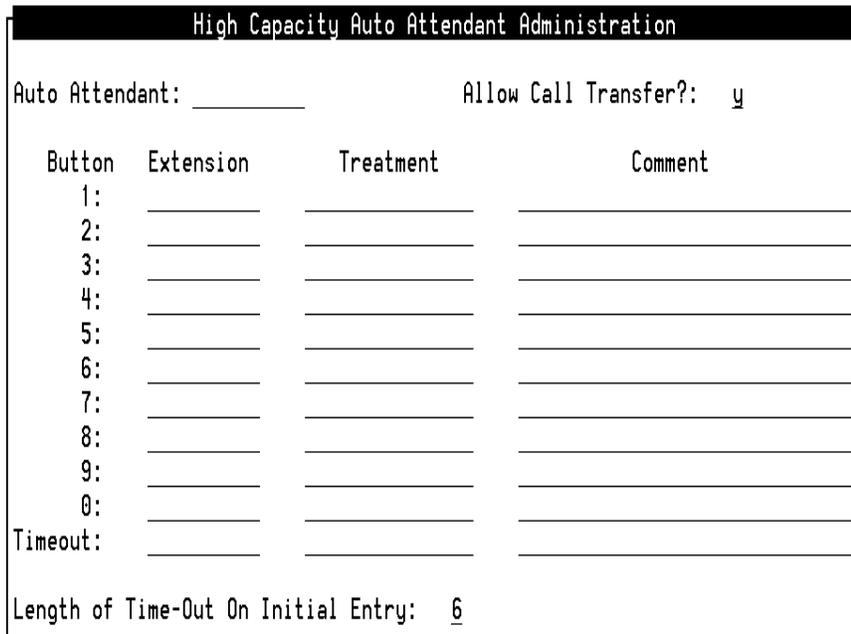

**Figure 3-29. High Capacity Auto Attendant Administration Screen**

4. Complete auto-attendant administration on the High Capacity Auto Attendant Administration screen using Table 3-7.

**Table 3-7. High Capacity Auto Attendant Administration Screen Field Descriptions**

<b>Field</b>	<b>Description</b>	<b>Valid Input</b>
Auto Attendant	The extension for which the auto-attendant feature is being administered.	
Allow Call Transfer?	Indicates whether this auto-attendant extension will support the call answer feature	y or n
Button (1-0)	Telephone button to be defined for call-answer function.	 <b>NOTE:</b> If you enter y in the Allow Call Transfer field, *T is system defined for call-transfer

*Continued on next page*

**Table 3-7. High Capacity Auto Attendant Administration Screen Field Descriptions — Continued**

Field	Description	Valid Input
Extension	<p>The extension to be mapped to this telephone button.</p> <p><b>⇒ NOTE:</b> This field should be administered based on the value set-up in the <b>Address Format</b> field on the <b>Subscriber Class of Service Parameters</b> screen for the INTUITY AUDIX system. For more information, see <i>INTUITY AUDIX Release 3.3 Administration and Feature Operations</i>, 585-310-552, or <i>INTUITY Messaging Solutions Release 4 Administration</i>, 585-310-564.</p>	<p>3- to 10-digit extension number or <b>e</b>.</p> <p>Enter an extension number if you want the INTUITY AUDIX system to connect a call to this extension when the caller presses the associated telephone button.</p> <p>Enter <b>e</b> if you want the caller to be able to dial any subscriber whose extension or name begins with the associated telephone button.</p>

*Continued on next page*

**Table 3-7. High Capacity Auto Attendant Administration Screen Field Descriptions — Continued**

Field	Description	Valid Input
Treatment	Identifies how the INTUITY AUDIX system will handle a call when this telephone button is pressed.	<p><b>blank</b> indicates that this button is not an available menu selection</p> <p><b>call-answer</b> indicates that the call will be directly transferred into the mailbox for this extension without actually ringing the subscriber's telephone</p> <p><b>submenu</b> indicates that the call will be transferred to a nested auto-attendant</p> <p><b>transfer</b> indicates that the call will be transferred directly to the corresponding extension number</p>
Comment	This field is used for any notation that may help the administrator further identify this extension.	1- to 29-alpha-numeric characters or blank
Timeout	These fields indicate how calls will be handled once the time-out period has elapsed.	
Extension	<p>Indicates the extension to which the caller will be transferred after the time-out period has elapsed.</p> <p><b>⇒ NOTE:</b> If this field is left blank, the caller is disconnected after two time-out periods have elapsed.</p>	3- to 10-digits or blank

*Continued on next page*

**Table 3-7. High Capacity Auto Attendant Administration Screen Field Descriptions — Continued**

<b>Field</b>	<b>Description</b>	<b>Valid Input</b>
Treatment	Identifies how the INTUITY AUDIX system will handle a call after the timeout period has expired.	<p><b>blank</b> indicates that the default time-out prompt will be played once the time-out period has expired.</p> <p><b>call-answer</b> indicates that the call will be directly transferred into the mailbox for this extension without actually ringing the subscriber's telephone</p> <p><b>submenu</b> indicates that the call will be transferred to a nested auto-attendant</p> <p><b>transfer</b> indicates that the call will be transferred directly to the corresponding extension number</p>
Comment	This field is used for any notation that may help the administrator further identify this extension.	1- to 29-alpha-numeric characters or blank
Length of Time-Out On Initial Entry	Indicates the number of seconds the system will wait for a response from the caller.	0 to 9 <b>6</b> is the default

5. Press **F8** (CHG-KEYS) to change function keys.
6. Press **F1** (SAVE) to save the data entered.
7. Press **F6** (CANCEL) twice to return to the Lucent INTUITY Administration menu (Figure 3-17).

#### **Step 4: Record Greeting(s) for the High Capacity Option Auto-Attendant Menu(s)**

Use your touch tone telephone to record the auto-attendant menu greetings that callers will hear when they press a key on their telephones. You record an attendant menu greeting in the same way you record a personal greeting, except that you record the greeting for the attendant extension, and the greeting describes the option(s) for the attendant.

It is a good idea to write down a script for the menu greeting ahead of time and read it aloud to a colleague before recording it. We also recommend that you write down the menu greeting numbers so that you will have both the number and the corresponding greeting script should you need to re-record any greetings at a later date.

You might wish to consider the following in the menu greeting script:

- A "hello and welcome" greeting followed by the menu choices available to the caller
- An instruction on how to transfer to a specific extension
- An instruction to wait if a time-out extension is administered
- An instruction on how to repeat the menu selections

#### **Automated Attendant Examples**

---

##### **NOTE:**

If EAS (Expert Agent Selection) is turned on, the emergency call-answer feature will not work with the High Capacity auto-attendant, unless the administered switch is a G3V4 70.1 or higher.

The examples on the following pages describe some applications for the auto-attendant feature.

#### **Administer a Main Attendant**

A main attendant is an attendant that can be reached directly by callers who dial through your switch. This attendant can answer your company's main telephone, or an individual department's main telephone. It must be associated with an extension that is administered on the switch.

For this example, the auto-attendant is set up to answer the company's main telephone. It offers callers the option of transferring to the sales, accounting, or personnel departments by pressing a number or dialing any internal extension that begins with a specific number, or transferring to a receptionist. If the caller does not respond within a specified amount of time, the call is transferred automatically to the receptionist.

If the caller chooses to transfer to accounting or personnel, the caller will immediately hear the call answer greeting active for the mailbox associated with called extension rather than being transferred through the switch.

### Administer Nested Attendants

A nested attendant is an attendant that is invoked by another attendant. The nested attendant can also be a main attendant; that is, the extension can be reached directly by internal and external callers who dial the extension number directly.

For example, callers who dial the accounting department's extension directly could hear voice options from a main attendant for that department, as could callers who transferred to the accounting department by pressing a specified number at the main menu in the previous example. The accounting department's attendant is said to be nested beneath the company's main menu.

Additional menus can be nested beneath the accounting department's attendant, such as for transferring to the payroll or accounts receivable desk.

To administer an auto-attendant system that contains nested attendants, you must start from the bottom, or deepest, layer and work your way backwards to the main or higher-layer attendant that will contain it. For instance, to administer the menu system described in the example below, you must define and administer the accounting department auto-attendant before defining and administering the main auto-attendant.

A good way to approach setting up nested auto-attendants is to diagram the complete system on paper, including telephone keypad options and their corresponding menu or call treatment. You might wish to write the scripts for the menu greetings at this time, as well. Once you are satisfied with your menu tree, start administering the tree from the last layer, and continue backwards until you reach and administer the main auto-attendant.

A simple example of this application is shown below. In this example, pressing **[2]** at the main menu transfers the caller to the accounting department's attendant, and pressing **[3]** at that attendant transfers the call to the payroll department's extension.

Attendant	Button	Extension	Treatment	Comment
main	2	52200	submenu	go to accounting attendant
accounting	3	52205	transfer	transfer to payroll extension

To the caller, this nesting is transparent because the nested attendant is invoked immediately by the system without transferring the caller through the switch. The caller in this example would hear the main attendant options, press **[2]** to transfer to accounting, hear the accounting department attendant options, and press **[3]** to transfer to the payroll extension without the delay that is associated with transferring back through the switch.

## Removing a High Capacity Option Auto-Attendant


---

**⇒ NOTE:**

Each extension attached to an auto-attendant must be deleted one by one.

To remove a High Capacity Option auto-attendant, do the following:

1. Starting at the INTUITY Administration menu (Figure 3-17), select

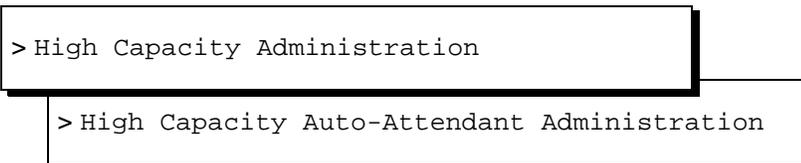

The system displays the High Capacity Auto-Attendant Administration window (Figure 3-29).

2. Press **[F8]** (Chg-Keys).
3. Enter the auto-attendant to be removed.
4. Press **[F2]** (Delete).

The system displays a confirmation window (Figure 3-30).




---

**Figure 3-30. Confirmation Window**

5. Select **Yes**.

The system displays the Result of Auto-Attendant Administration window (Figure 3-31).

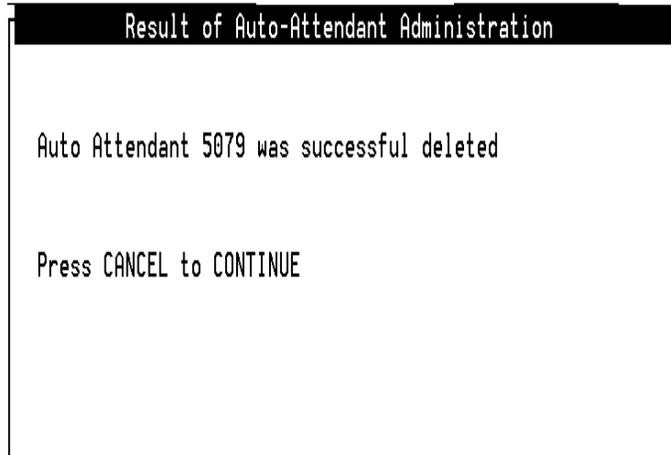

---

**Figure 3-31. Result of Auto-Attendant Administration**

6. Press **Ⓢ** (Cancel) until you return to the INTUITY Administration menu (Figure 3-17).
7. Select **AUDIX Administration**.
8. Enter ***remove subscriber auto-attendant***.



**NOTE:**

***Auto-attendant*** is the identification number for the auto-attendant extension being removed.

The system displays the Subscriber screen(Figure 3-32).

```
remove subscriber 5079                                     Page 1 of 2
SUBSCRIBER
Name: Ford 3                                             Locked? n
Extension: 5079                                         Password:
COS: custom                                             Miscellaneous:
Switch Number: 2                                        Covering Extension:
Community ID: 1                                         Broadcast Mailbox? n
Secondary Ext:

Press [Enter] to execute or [Cancel] to abort
enter command: remove subscriber 5079
```

---

**Figure 3-32. Subscriber Screen**

9. Press **F3** (Enter).
10. Enter **exit**
11. Press **F6** (Cancel) until you return to the INTUITY Administration menu (Figure 3-17).

---

## High Capacity Option Acceptance Tests

# 4

---

### What's in This Chapter?

This chapter provides the acceptance test procedures specific to the INTUITY™ AUDIX® High Capacity Option cluster. This chapter assumes that acceptance test procedures described in *INTUITY MAP/100 Hardware Installation*, 585-310-139, or *Lucent INTUITY™ Messaging Solutions Release 4 MAP/100 Maintenance*, 585-310-174, have already been performed on each INTUITY AUDIX system.

Acceptance test procedures include:

- Testing link status and ping
- Running remote updates
- Testing call answer
- Testing the mailbox access vector directory number (VDN)
- Testing adjunct system transfers

These procedures must be completed before turning the High Capacity Option cluster over to the customer.

#### NOTE:

If subscribers exist on all the INTUITY AUDIX systems in the High Capacity Option cluster, you may proceed with the tests in this chapter. If subscribers do not exist, you must administer the subscriber database on each INTUITY AUDIX system with at least a single subscriber to perform these tests. See "Adding Test Subscribers" in this chapter to add test subscribers for these procedures; otherwise, see *INTUITY MAP/100 Hardware Installation*, 585-310-139, or *Lucent INTUITY™ Messaging Solutions Release 4 Administration*, 585-310-564, for procedures to create subscribers.

## Testing Prerequisites

---

This chapter tests basic link and voice messaging capabilities of the High Capacity cluster. You must have a test subscriber and a test telephone administered for each INTUITY AUDIX system in the High Capacity Option cluster. See "Adding Test Subscribers" later in this chapter for information on adding a test subscriber.

## Testing Link Status and Ping

---

The following tests verify the link between the INTUITY AUDIX systems and the DEFINITY® LAN Gateway.


### Test 1

---

**⇒ NOTE:**

This procedure should be performed for each INTUITY AUDIX system in the cluster and for the DEFINITY LAN Gateway.

1. Start at the Lucent INTUITY Administration menu (Figure 3-17) on the primary adjunct system and select

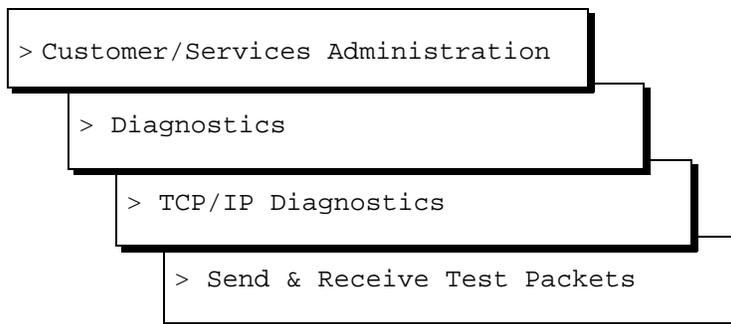

The system displays the Send & Receive Test Packets From screen (Figure 4-1).



---

**Figure 4-1. Send & Receive Test Packets From Screen**

2. Enter the Internet Protocol (IP) address for system.
3. Press **F3** (SAVE) to start the test.

The system displays the message *working...* in the upper right-hand corner of the screen. While the cursor flashes, the system is performing the test. When finished, the system displays the Test Packets Results window (Figure 4-2).

**⇒ NOTE:**

Figure 4-2 is an example only. The test results displayed on your system will not match those shown here.

```
Test Packets Results
72 bytes from xxx.xx.xx.xx: icmp_seq=0. time=0. ms
72 bytes from xxx.xx.xx.xx: icmp_seq=1. time=0. ms
72 bytes from xxx.xx.xx.xx: icmp_seq=2. time=0. ms
72 bytes from xxx.xx.xx.xx: icmp_seq=3. time=0. ms
72 bytes from xxx.xx.xx.xx: icmp_seq=4. time=0. ms
72 bytes from xxx.xx.xx.xx: icmp_seq=5. time=0. ms
72 bytes from xxx.xx.xx.xx: icmp_seq=6. time=0. ms
72 bytes from xxx.xx.xx.xx: icmp_seq=7. time=0. ms
72 bytes from xxx.xx.xx.xx: icmp_seq=8. time=0. ms
72 bytes from xxx.xx.xx.xx: icmp_seq=9. time=0. ms

---- xxx.xx.xx.xx PING Statistics----
10 packets transmitted, 10 packets received, 0% packet loss
round-trip (ms)  min/avg/max = 0/0/0

Note: High packet loss, long round-trip time, or packets received out
of order (icmp_seq) may indicate a network problem.

Press <HELP> for more information, <CANCEL> to continue.
```

**Figure 4-2. Test Packets Results Window**

4. Examine the `packet loss` field in the `PING Statistics` fields displayed on the Test Packets Results window. The value for this field will be either 0% or 100%, as described below:
  - If 0% packet loss is reported, the test is successful. This result indicates that the problem is *not* with the DEFINITY LAN Gateway.
  - If 100% packet loss is reported, the test failed. Check with your LAN administrator to ensure that you used the correct IP address for the system. This result may indicate a problem with the Lucent INTUITY system's UNIX TCP/IP software. Reboot the system, and repeat this test. If the test still fails, contact your remote service center. See *INTUITY MAP/100 Hardware Installation*, 585-310-139, or *Lucent INTUITY™ Messaging Solutions Release 4 MAP/100 Maintenance*, 585-310-174, for procedures to reboot the system.

5. Repeat this procedure for each INTUITY AUDIX system in the High Capacity cluster and for the DEFINITY LAN Gateway.

If any of these tests are unsuccessful, perform the following repair actions:

1. Check the TCP/IP digital networking administration. See Chapter 3, "High Capacity Option Administration".
2. Verify that LAN and the DEFINITY LAN Gateway are administered and physically connected properly. See Chapter 3, "High Capacity Option Administration" and *Lucent DEFINITY® Communications System Generic 3 Installation, Administration, and Maintenance of CallVisor® ASAI over the DEFINITY LAN Gateway*, 555-230-223, for administration information for the DEFINITY LAN Gateway.

## Test 2

---

 **NOTE:**

This procedure must be performed from the primary or secondary adjunct system.

1. Log on to the INTUITY AUDIX primary adjunct system as **tsc** or **root**
2. Enter **link\_status**

The system displays the following information:

Link	Dest	Type	Status
1	lzasai2	LAN	Talking

3. Verify that the `Status` column is `Talking`.
4. If this test fails, perform the following repair actions.
  - a. Verify the High Capacity cluster is administered properly. See Chapter 3, "High Capacity Option Administration".
  - b. Verify that LAN and the DEFINITY LAN Gateway are administered and physically connected properly. See Chapter 3, "High Capacity Option Administration" and *Lucent DEFINITY® Communications System Generic 3 Installation, Administration, and Maintenance of CallVisor® ASAI over the DEFINITY LAN Gateway*, 555-230-223, for administration information for the DEFINITY LAN Gateway.

## Adding Test Subscribers

Add a test subscriber to test the High Capacity cluster. The test subscriber and the test telephone number must be unique for each INTUITY AUDIX system. Identify the test subscriber with the INTUITY AUDIX system number. For example, subscriber **test-3** should be added to INTUITY AUDIX system #3 in the High Capacity cluster.

### ⇒ NOTE:

You must have a test subscriber and a test telephone for each INTUITY AUDIX system.

1. Start at the Lucent INTUITY Administration menu (Figure 3-17) and select

```
> AUDIX Administration
```

2. Enter **add su** at the `enter command:` prompt.

The system displays Page 1 of the Add Subscriber screen (Figure 4-3).

```

add subscriber                                     Page 1 of 2
                                SUBSCRIBER

      Name: _____ Locked? n
      Extension: _____ Password: _____
      COS: class00 _____ Miscellaneous: _____
      Switch Number: _____ Covering Extension: _____
      Community ID: _____ Broadcast Mailbox? _
      Secondary Ext: _____

Press [ENTER] to execute or press [CANCEL] to abort
enter command: add subscriber

```

**Figure 4-3. Add Subscriber Screen, Page 1**

3. Enter **test-<x>** in the `Name:` field.

### ⇒ NOTE:

<x> is the number of this system

4. Move the cursor to the `Extension:` field.
5. Enter the extension associated with the test telephone for this subscriber.
6. Move to the `Password` field and enter the system number as the password for this subscriber (for example, 1-8).
7. Press `F3` (ENTER) to add the test subscriber to the system.

**⇒ NOTE:**

This procedure uses the default for the remaining fields.

The system displays the following message above the `enter command:` prompt.

`command successfully completed`

8. Repeat Steps 3 through 7 for each INTUITY AUDIX system in the High Capacity Option cluster.
9. Enter **exit** `enter command:` prompt to return to the Lucent INTUITY Administration menu.

## Running a Remote Update

You need to run a remote update to populate the user database on each INTUITY AUDIX system. A remote update must run for each INTUITY AUDIX system from each INTUITY AUDIX to update the user database on each INTUITY AUDIX machine. For example, if there are three systems in the High Capacity Option cluster, perform this procedure for the following machines:

<b>From INTUITY AUDIX System #</b>	<b>For INTUITY AUDIX System(s) #</b>
1	2 and 3
2	1 and 3
3	1 and 2

Therefore, a remote update must be performed six times to completely update the user database on each INTUITY AUDIX system in the High Capacity Option cluster.

**⇒ NOTE:**

This procedure must also be performed after all subscribers have been added to the INTUITY AUDIX systems.

To run a remote update, do the following:

1. Start at the Lucent INTUITY Administration menu (Figure 3-17) and select

> AUDIX Administration

2. Enter **get remote\_updates <remote machine name>** at the `enter command:` prompt.

The system displays the Remote Update Request screen (Figure 4-4).

---

```
drmid11 Active Alarms: mwA Logins: 4
get remote_updates lzbart Page 1 of 1
REMOTE UPDATE REQUEST
```

```
Request Full Update from Machine: lzbart
      Status of Last Update: completed
      Last Completed Update: 01/10/94 19:54
Press [Enter] for Full Update Request
      [Cancel] to Abort
```

---

```
enter command: get remote_updates lzbart
```

---

**Figure 4-4. Remote Update Request Screen**

3. Press **ENTER** to begin the remote update.  
The remote update begins. The update may take some time, possibly hours, depending on the number of users on the remote system.
4. Determine if the remote update has completed by entering **get remote\_updates <remote machine name>** at the `enter command:` prompt. The status of the last update should say `completed` and the time stamp should be recent.
5. Press **CANCEL** to exit the screen without starting another update.

6. When the remote updates procedure has completed, do the following:
  - a. Check to see that the remote users are on the local system by entering **list remote extensions <machine\_name>** at the `enter command:` prompt.
  - b. Display the Administration Log screen by entering **display administration-log** at the `enter command:` prompt. Verify that no conflicts or problems occurred with the remote update.
7. Repeat Steps 2 through 6 from this INTUITY AUDIX system for all other systems in the High Capacity cluster.
8. Repeat this procedure from each INTUITY AUDIX system in the High Capacity Option cluster.

## **Testing INTUITY AUDIX Call Answer**

---

Complete the procedures in this section to

- Create and send a test message.
- Verify emergency call answer.

### **Creating and Sending a Test Message**

---

To create and send a test message, do the following:

1. From test telephone #1, place a call to test telephone #2.
2. Speak into the telephone and record the following (or a similar test message) after the tone:  
  
"This is a test call answer message for test telephone <x>"  
  
where <x> is the system number of the INTUITY AUDIX associated with the test extension dialed.
3. Hang up the telephone to disconnect.
4. Repeat Steps 1 through 3 above, calling test telephone #3 from test telephone #2, etc, for all the INTUITY AUDIX test extensions. A message should be left in the mailbox for each test subscriber.
5. Continue with the next procedure.

## **Verifying Emergency Call Answer**

To verify emergency call answer, do the following:

1. From an INTUITY AUDIX system, perform the "Stopping the Voice System" procedure as described in *Lucent INTUITY MAP/100 Hardware Installation*, 585-310-139, or *Lucent INTUITY™ Messaging Solutions Release 4 MAP/100 Maintenance*, 585-310-174.
2. Dial the extension for the test subscriber that resides on the INTUITY AUDIX system for which the voice system is stopped.  
The system responds with the emergency call answer message.
3. Leave a message for the subscriber.
4. Perform the "Starting the Voice System" procedure as described in *Lucent INTUITY MAP/100 Hardware Installation*, 585-310-139, or *Lucent INTUITY™ Messaging Solutions Release 4 MAP/100 Maintenance*, 585-310-174.

### **⇒ NOTE:**

It may take up to 10 minutes for the message to be delivered to the subscriber's mailbox once the voice system is started.

5. Log in to the test subscriber's mailbox and verify the voiced name in the message header indicates it is from the emergency call answer mailbox.
6. Repeat Steps 1 through 5 for each INTUITY AUDIX system in the High Capacity Option cluster.

If this test is unsuccessful, perform the following repair actions:

1. Verify High Capacity Option administration. See Chapter 3, "High Capacity Option Administration".
2. Verify the emergency call answer mailboxes are administered. See Chapter 3, "High Capacity Option Administration".
3. Verify that the digital network name and system name are identical.

## **Testing the Mailbox Access VDN**

To test the mailbox access vector directory number (VDN), do the following.

### **⇒ NOTE:**

This test must be done locally and should be performed twice for each INTUITY AUDIX system in the High Capacity Option cluster.

1. Call the mailbox access VDN. Allow the INTUITY AUDIX application to answer.
2. Enter **#** when INTUITY AUDIX asks for the extension.

3. Enter INTUITY AUDIX system number when INTUITY AUDIX asks for the password.

**⇒ NOTE:**

If the system is administered to require a longer password, you may have to change the password. Follow the voiced instructions if this occurs and use a string of digits that still identifies the INTUITY AUDIX system number. We recommend that the first digit in the password be used to identify the system's place within the cluster. For example, if this is INTUITY AUDIX system #1, use 1736 as the password. The first digit "1" in the password would indicate that this is the first INTUITY within the High Capacity Cluster.

After entering the password, you should *not* hear the message `please wait` as this indicates a transfer.

4. Add the voice name "test subscriber."
5. Verify the call answer message exists in the subscriber mailbox by pressing `[2]` to retrieve messages.  
The system plays the date and time that message was received.
6. Press `[*] [D]` to delete the test message.
7. Hang up the telephone to disconnect.
8. Repeat Steps 1 through 8 above on each INTUITY AUDIX system in the High Capacity Option cluster.

## **Testing Adjunct System Transfers**

To test adjunct system transfers, do the following.

1. Call the mailbox access VDN from test telephone #1. Allow the INTUITY AUDIX application to answer.
2. Enter an extension of test telephone #2 which is on a different INTUITY from test telephone #1.
3. Enter the password associated with the test telephone #2 when INTUITY AUDIX asks for the password.

**⇒ NOTE:**

If the system is administered to require a longer password, you may have to change the password. Follow the voiced instructions if this occurs and supply a password of your own choice.

You should hear `please wait` and then a voiced name for the extension you are logging into. This verifies that you have accessed the correct INTUITY AUDIX for this subscriber.

- Repeat Steps 1 through 3, using test telephone #3 from test telephone #2, etc, for all the INTUITY AUDIX test extensions in the High Capacity Option cluster.

## Removing Test Subscribers

Complete this procedure to remove test subscriber <x> (for example, 1-8) for each of the INTUITY AUDIX systems.

- Start at the Lucent INTUITY Administration menu (Figure 3-17) and select

```
> AUDIX Administration
```

- Enter **rem su test-<x>** at the enter command: prompt.

### ⇒ NOTE:

<x> is the INTUITY AUDIX system number.

The system displays the Remove Subscriber screen showing subscriber test-<x> (Figure 4-5).

```
lzleo1      Active      Alarms: MmWA      Logins: 3
remove subscriber test13      Page 1 of 2
SUBSCRIBER
Name: test13      Locked? n
Extension: 01111      Password:
COS: class00      Miscellaneous:
Switch Number: 2      Covering Extension:
Community ID: 1      Broadcast Mailbox? n
Secondary Ext:

Press [Enter] to execute or [Cancel] to abort
enter command: remove subscriber test13
```

Figure 4-5. Remove Subscriber Screen

3. Press **␣** (ENTER) to remove the test subscriber from the system.  
The system displays the following message:  
`command successfully completed`
4. Enter **exit** at the `enter command:` prompt to return to the Lucent INTUITY Administration menu.

---

## INTUITY Administration in the Expert Agent Selection Environment



---

### What's in This Appendix?

This appendix contains procedures for administering an INTUITY High Capacity Option hunt group on a DEFINITY G3 switch in the Expert Agent Selection (EAS) environment.

**⇒ NOTE:**

You should complete the "Assign User Defined Adjunct Names" and "Administer the Voice Port Stations" procedures as described in Chapter 4 - "DEFINITY G3r Administration" in *INTUITY Integration with System 75 and DEFINITY Communications System Generic 1 and Generic 3*, 585-310-214, prior to beginning the administration procedure described in this appendix.

### Administering the Hunt Group in the EAS Environment

The hunt group is a set of analog ports on the switch that connects subscribers and users to the Lucent INTUITY system by distributing new calls to idle ports. DEFINITY G3r switches use Uniform Call Distribution (UCD) for distributing calls to the ports. See the appropriate switch documentation for more information about call distribution groups.

Use the following steps to administer the voice ports connected to a hunt group starting with port 1:

1. Log on to the switch Management Terminal (MT) by entering the **craft** or **inads** as the user ID.
2. Enter your password.
3. Enter the correct terminal type for the MT.

4. Enter **add hunt-group <hunt group number>** at the command prompt.  
The system displays the Hunt Group, Page 1 screen (Figure A-1).

```

add hunt-group 31                                     Page 1 of 2
                HUNT GROUP
Group Number: 31      Group Extension: 51999      Group Type: ucd
Group Name: lzleo2    Skill? y                   ACD? y
Queue? y              Vector? y                  AAS? n
Security Code: _____ COR: 1
ISDN Caller Disp: _____ TN: 1
                Measured: none                    Supervisor Extension: _____
Controlling Adjunct: none
                Queue Length: 64
Calls Warning Threshold: _____ Calls Warning Port: _____
Time Warning Threshold: _____ Time Warning Port: _____
                Redirect on No Answer (rings): _____
                Forced Entry of Stroke Counts or Call Work Codes? n
    
```

**Figure A-1. Hunt Group Screen, Page 1**

5. Use Table A-1 to enter the appropriate field values. Only the fields listed in the table should be administered. All other fields should be left at their default values.

**Table A-1. G3r Hunt Group Screen, Page 1 Field Descriptions**

Field	Description
Group Number	The field contains the hunt group identification number assigned to the hunt group.
Group Extension	The extension number assigned to the hunt group.
Group Type	ucd
Group Name	The name display set users see when they call the INTUITY system to access voice messaging features.
Skill?	y
ACD	y


*Continued on next page*

**Table A-1. G3r Hunt Group Screen, Page 1 Field Descriptions — Continued**

<b>Field</b>	<b>Description</b>
Queue?	y
Vector?	y
AAS	n
COR	Class of Restriction
ISDN Caller Disp	Grp-name or mbr-name to specify whether the hunt group name or member name will be sent to the originating user.
TN	1
Measured	None
Controlling Adjunct	None
Queue Length	Queue length should be equal to the number of Lucent INTUITY voice ports configured for the Lucent INTUITY system.
Forced Entry of Stroke Counts or Call Work Codes?	n

6. Press **F3** (ENTER) to save the information. The system will refresh the screen.

7. Press **F7** (NEXT PAGE) to move to the second page of the Hunt Group screen as shown in Figure A-2.

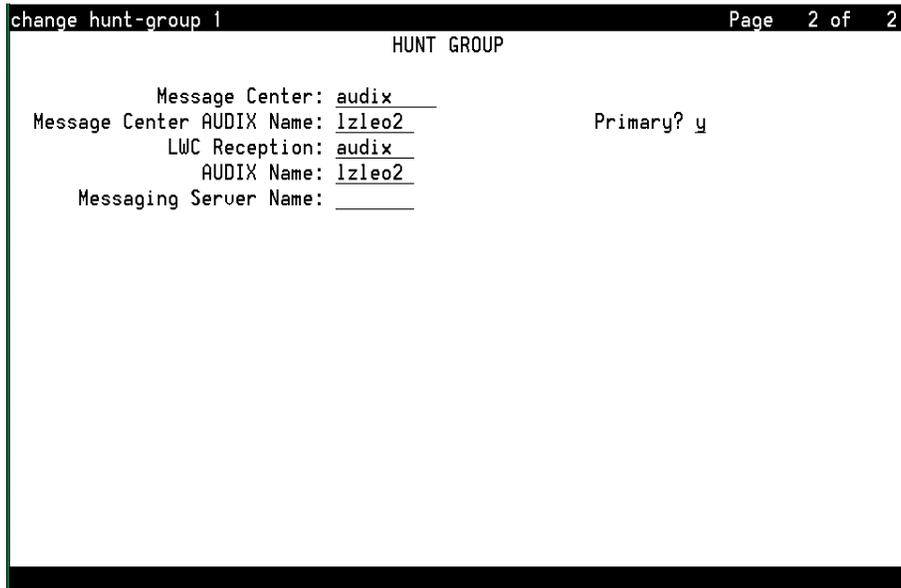

**Figure A-2. Hunt Group Screen, Page 2**

8. Use Table A-2 to enter the appropriate field values.

**Table A-2. Hunt Group Screen, Page 2 Field Descriptions**

Fields	Description
Message Center	<b>audix</b> in this field identifies the Lucent INTUITY system as a voice messaging product
Message Center AUDIX Name	Name assigned to this AUDIX Message Center
Primary	y
LWC Reception	audix
AUDIX Name	Name associated with the INTUITY AUDIX machine
Messaging Server Name	Leave this field blank

9. Press **Ⓜ** (ENTER) to save the information. The system will refresh the screen.
10. Press **Ⓚ** (CANCEL) to exit the Hunt Group screen and return to the command prompt.

## Administering the Agent in the EAS Environment

---

Use the following steps to administer the agent connected to a hunt group:

1. Enter **add agent-login ID <extension>** at the command prompt.  
The system displays the Agent LoginID screen (Figure A-3).

```
add agent-loginID 50008                                     Page 1 of 1
AGENT LOGINID
Login ID: 50008                                           TN: 1
Name: lzleo2 8                                           COR: 1
Coverage Path: _____ Security Code: _____
LWC Reception: audix                                     AUDIX Name for Messaging: lzleo2
AAS? n                                                   Messaging Server Name for Messaging: _____
AUDIX? y                                                 LoginID for ISDN Display? n
Port Extension: 51501

Skill Primary/Secondary AUDIX Name
1: 1 primary
2: _____
3: _____
4: _____

WARNING: Agent must log in again before skill changes take effect
```

---

**Figure A-3. Agent LoginID Screen**

- Use Table A-3 to enter the appropriate field values. Only the fields listed in the table should be administered. All other fields should be left at their default values.

**Table A-3. Agent LoginID Screen Field Descriptions**

<b>Field</b>	<b>Description</b>
Login ID	Login ID associated with the agent being administered
TN	1
Name	Name associated with this agent ID
COR	Class of Restriction
LWC Reception	audix
AUDIX NAME for Messaging	AUDIX name used by the Lucent INTUITY system for voice messaging.
AAS?	n
AUDIX	y
Port Extension	<p><b>⇒ NOTE:</b> This field is <i>only</i> displayed after entering a <b>y</b> in the AUDIX field</p> <p>Station for this hunt group for this INTUITY AUDIX machine</p> <p><b>⇒ NOTE:</b> Each member of the hunt group should be administered using this field.</p>

***Continued on next page***

**Table A-3. Agent LoginID Screen Field Descriptions — *Continued***

<b>Field</b>	<b>Description</b>
Skill	(1 through 4) The hunt group for which this port extension is a member.
Primary/Secondary	Always set as primary
AUDIX Name	AUDIX name associated with this port extension.

3. After you enter the correct information in each field, press **F3** (ENTER) to save the information. The system will refresh the screen.
4. Press **F1** (CANCEL) to exit the Agent LoginID screen and return to the command prompt.
5. Repeat Steps 1 through 4 for each port in the INTUITY hunt group.
6. Enter **logoff** at the command prompt to exit the system.



---

# Abbreviations

---

## A

### AAG

AMIS Analog Gateway module

### ADAP

administration and data acquisition package

### ALT

assemble load and test

### AMIS

audio messaging interchange specification

### API

application programming interchange

### AUDIX

audio information exchange

---

## B

### BCS

Business Communications Systems

### bit

binary digit

### bps

bits per second

---

## C

### CPU

central processing unit

---

## D

### DCIU

data communications interface unit

### DCP

digital communication protocol

### DCS

distributed communication system

### DID

direct inward dialing

### DNIS

dialed number identification service

---

## E

### ESD

electrostatic discharge

---

## H

### HMM

Hub message manager

---

## I

### IMAPI

INTUITY messaging application programming interface

### INADS

initialization and administration system

### IP

Internet protocol

---

## L

### LAN

local area network

### LDAP

lightweight directory access protocol

---

## M

### MAP

multi-application platform

**MT**  
maintenance (Lucent INTUITY software component)

**MWI**  
message-waiting indicator

**MWL**  
message-waiting lamp

---

**N**

**NW**  
INTUITY AUDIX Digital Networking module

---

**P**

**PEC**  
price element code

**PPP**  
point to point protocol

---

**R**

**RFU**  
remote field update

**RTU**  
right to use

---

**S**

**SCE**  
service creation environment

**SNMP**  
simple networking management protocol

**SWIN**  
switch interface

**T**

**TCP/IP**  
Transmission Control Protocol/Internet Protocol

**TSC**  
Technical Services Center

**TSO**  
Technical Services Organization

---

**V**

**VDN**  
vector directory number

**VP**  
voice platform (INTUITY software component)

---

**W**

**WAN**  
wide area network

---

# Glossary

## **5ESS Switch**

A central office switch manufactured by Lucent that can be integrated with the Lucent INTUITY system.

---

## **A**

### **accessed message**

A message that was received and scanned (either the entire message or just the header).

### **ACD**

See *automatic call distribution*.

### **activity menu**

The list of options spoken to users when they first access a messaging system. Selecting an activity is the starting point for all user operations.

### **ADAP**

See *administration and data acquisition package*.

### **address**

INTUITY AUDIX user identification, containing the user's extension and machine, that indicates where the system needs to deliver a message. An address may include several users or mailing lists. Name or number addressing can be selected with the   (Address) command.

### **adjunct**

A separate system closely integrated with a switch, such as an Lucent INTUITY system or a call management system (CMS).

### **administration**

The process of setting up a system (such as a switch or a messaging system) to function as desired. Options and defaults are normally set up (translated) by the system administrator or service personnel.

### **administration and data acquisition package (ADAP)**

A software package that allows the system administrator to transfer system user, maintenance, or traffic data from an INTUITY AUDIX system to a personal computer (PC).

### **ADU**

See *asynchronous data unit*.

### **alarm log**

A list of alarms that represent all of the active or resolved problems on a Lucent INTUITY system. The alarm log is stored in a software file on disk and can be accessed either locally or remotely on a terminal connected to the system.

### **alarms**

Hardware, software, or environmental problems that may affect system operation. Alarms are classified as *major*, *minor*, or *warning*.

### **alphanumeric**

Consisting of alphabetic and numeric symbols or punctuation marks.

**ALT**

See *assemble, load, and test*.

**American wire gauge (AWG)**

A standard measuring gauge for nonferrous conductors.

**AMIS**

See *Audio Messaging Interchange Specification*.

**AMIS prefix**

A number added to the destination number to indicate that it is an AMIS analog networking number.

**ampere (amp)**

The unit of measurement of electric current. One volt of potential across one ohm causes a current flow of one amp.

**analog networking**

A method of transferring a message from one messaging system to another whereby the message is played back (voiced) during the transfer.

**analog signal**

In teleprocessing usage, a communications path that usually refers to a voice-grade telephone line.

**announcement**

A placeholder within the Lucent INTUITY system for playing fragments. Each event that may occur within AUDIX has one or more announcement numbers permanently assigned to it. Fragment numbers are then assigned to the announcement numbers.

**announcement fragment**

A numbered piece of spoken information that makes up a system message or prompt.

**antistatic**

A treatment for material to prevent the build-up of static electricity.

**API**

See *application programming interface*.

**application**

A computer software program.

**application programming interface (API)**

A set of formalized software calls and routines that an application program can reference to access underlying network services.

**assemble, load, and test (ALT)**

The Lucent factory process that preloads software, installs hardware, and tests the system prior to shipping.

**asynchronous communication**

A method of data transmission in which bits or characters are sent at irregular intervals and spaced by start and stop bits rather than time. See also *synchronous communication*.

**asynchronous data unit (ADU)**

An electronic communications device that can extend data transmission over asynchronous lines more than 50 feet in length. Recommended ADUs for use with the Lucent INTUITY system include Z3A1 or Z3A4.

**asynchronous transmission**

A form of serial communications where each transmitted character is bracketed with a start bit and one or two stop bits. The Lucent INTUITY system provides asynchronous EIA-232 capabilities for INTUITY AUDIX Digital Networking, if required.

**attendant console**

A special-purpose telephone with numerous lines and features usually located at the front desk of a business or other organization. The front desk attendant uses this telephone to answer and transfer calls.

**Audio Messaging Interchange Specification (AMIS)**

An analog networking protocol that allows users to exchange messages with any messaging system that also has AMIS Analog Networking capabilities. Messages can be exchanged with users on Lucent INTUITY systems as well as with users on remote messaging systems made by vendors other than Lucent.

**Audio Information Exchange (AUDIX)**

A complete messaging system accessed and operated by touch-tone telephones and integrated with a switch.

**audit**

A software program that resolves filesystem incompatibilities and updates restored filesystems to a workable level of service. Audits are done automatically on a periodic basis, or can be performed on demand.

**AUDIX**

See *Audio Information Exchange*.

**autodelete**

An INTUITY AUDIX feature that allows users to designate that faxes be automatically deleted from their mailboxes after they are printed.

**automated attendant**

A Lucent INTUITY system feature that allows users to set up a main extension number with a menu of options that routes callers to an appropriate department at the touch of a button.

**automatic call distribution (ACD)**

The System 85, Generic 2, or Generic 3 call-distribution group of analog ports that connects Lucent INTUITY users and users to the system. See also *call-distribution group*.

**automatic message scan**

An INTUITY AUDIX feature that allows users to scan all message headers and messages at the touch of two buttons. With Lucent INTUITY Fax Messaging, this feature allows all new faxes to be bundled and transmitted over a single fax call delivery call. Also called *autoscan*.

**autoprint**

An INTUITY AUDIX feature that allows users to designate that faxes be automatically sent to a specified print destination.

**autoscan**

See *automatic message scan*.

**AWG**

See *American wire gauge*.

## B

### **background testing**

Testing that runs continuously when the system is not busy doing other tasks.

### **backplane**

A centrally located device within a computer to which individual circuit cards are plugged for communication across an internal bus.

### **backup**

A duplicate copy of files and directories saved on a removable medium such as floppy diskette or tape. The back-up filesystem can be copied back (restored) if the active version is damaged (corrupted) or lost.

### **basic input/output system (BIOS)**

A system that contains the buffers for sending information from a program to the actual hardware device for which the information is intended.

### **baud**

A unit of measurement that describes the speed of transferred information.

### **baud rate**

Transmission signaling speed.

### **basic call transfer**

The switch-hook flash method used to send the INTUITY AUDIX transfer command over analog voice ports.

### **basic rate access**

See *basic rate interface*.

### **basic rate interface (BRI)**

International standard protocol for connecting a station terminal to an integrated systems digital network (ISDN) switch. ISDN BRI supports two 64-Kbps information-bearer channels (B1 and B2), and one 16-Kbps call status and control (D) channel (a 2B + D format). Also called *basic rate access*.

### **binary digit (bit)**

Two-number notation that uses the digits 0 and 1. Low-order bits are on the right (for example, 0001=1, 0010=2, and so forth). Four bits make a nybble; eight bits make a byte.

### **binary synchronous communications (BSC)**

A character-oriented synchronous link protocol.

### **BIOS**

See *basic input/output system*.

### **bit**

See *binary digit*.

### **bits per second**

The number of binary units of information (1s or 0s) that can be transmitted per second. *Mbps* refers to a million bits per second; *Kbps* refers to a thousand bits per second.

### **body**

The part of a Lucent INTUITY voice mail that contains the actual spoken message. For a leave word calling (LWC) message, it is a standard system announcement.

**boot**

The operation to start a computer system by loading programs from disk to main memory (part of system initialization). Booting is typically accomplished by physically turning on or restarting the system. Also called *reboot*.

**boot filesystem**

The filesystem from which the system loads its initial programs.

**bps**

See *bits per second*.

**BRI**

See *basic rate interface*.

**broadcast messaging**

An INTUITY AUDIX feature that enables the system administrator and other designated users to send a message to all users automatically.

**BSC**

See *binary synchronous communications*.

**buffer**

A temporary storage area used to equalize or balance different operating speeds. A buffer can be used between a slow input device, such as a terminal keyboard, and the main computer, which operates at a very high speed.

**bulletin board**

An INTUITY AUDIX feature that allows a message to be played to callers who dial the bulletin board extension. Callers cannot leave a message since it is a listen-only service. Also called *information service*.

**bundling**

Combining several calls and handling them as a single call. See also *automatic message scan*.

**bus**

An electrical connection/cable allowing two or more wires, lines, or peripherals to be connected together.

**busy-out/release**

To remove a Lucent INTUITY device from service (make it appear busy or in use), and later restore it to service (release it). The Lucent INTUITY switch data link, voice ports, or networking ports may be busied out if they appear faulty or when maintenance tests are run.

**byte**

A unit of storage in the computer. On many systems, a byte is 8 bits (binary digits), the equivalent of one character of text.

---

## C

**call accounting system (CAS)**

A software device that monitors and records information about a calling system.

**call-answer**

An INTUITY AUDIX feature that allows the system to answer a call and record a message when the user is unavailable. Callers can be redirected to the system through the call coverage or call forwarding switch features. INTUITY AUDIX users can record a personal greeting for these callers.

**call-answer language choice**

The capability of user mailboxes to accept messages in different languages. For the INTUITY AUDIX application, this capability exists when the multilingual feature is turned on.

**callback number**

In AMIS analog networking, the telephone number transmitted to the recipient machine to be used in returning messages that cannot be delivered.

**call coverage**

A switch feature that defines a preselected path for calls to follow if the first (or second) coverage points are not answered. The Lucent INTUITY system may be placed at the end of a coverage path to handle redirected calls through call coverage, send all calls, go to cover, etc.

**call delivery**

See *message delivery*.

**call-distribution group**

The set of analog port cards on the switch that connects switch users to the Lucent INTUITY system by distributing new calls to idle ports. This group (or split) is called automatic call distribution (ACD) on System 85, Generic 2, and Generic 3 and uniform call distribution (UCD) on System 75, Generic 1, and Generic 3. See also *automatic call distribution* and *uniform call distribution*.

**call management system (CMS)**

An inbound call distribution and management reporting package.

**called tone (CED tone)**

The distinctive tone generated by a fax endpoint when it answers a call (a constant 2100-Hz tone).

**called subscriber information (CSI)**

The identifier for the answering fax endpoint. This identifier is sent in the T.30 protocol and is generally the telephone number of the fax endpoint.

**calling tone (CNG tone)**

The distinctive tone generated by a fax endpoint when placing a call (a constant 1100-Hz tone that is on for 1/2 second, off for 3 seconds).

**call vectoring**

A System 85 R2V4, Generic 2, and Generic 3 feature that uses a vector (switch program) to allow a switch administrator to customize the behavior of calls sent to an automatic call distribution (ACD) group.

**card cage**

An area within the Lucent INTUITY hardware platform that contains and secures all of the standard and optional circuit cards used in the system.

**cartridge tape drive**

A high-capacity data storage/retrieval device that can be used to transfer large amounts of information onto high-density magnetic cartridge tape based on a predetermined format. This tape is to be removed from the system and stored as a backup.

**CAS**

See *call accounting system*.

**CED tone**

See *called tone*.

**CELP**

See *code excited linear prediction*.

**central office (CO)**

An office or location in which large telecommunication equipment such as telephone switches and network access facilities are maintained. In a CO, private customer lines are terminated and connected to the public network through common carriers.

**central processing unit (CPU)**

The component of the computer that manipulates data and processes instructions coming from software.

**channel**

A telecommunications transmission path for voice and/or data.

**channel capacity**

A measure of the maximum bit rate through a channel.

**CICS**

See *customer information control system*.

**class of service (COS)**

The standard set of INTUITY AUDIX features given to users when they are first administered (set up with a voice mailbox).

**clear to send (CTS)**

Located on Pin 5 of the 25-conductor RS-232 interface, CTS is used in the transfer of data between the computer and a serial device.

**client**

A computer that sends, receives and uses data, but that also shares a larger resource whose function is to do most data storage and processing. For Lucent INTUITY Message Manager, the user's PC running Message Manager is the client. See also *server*.

**CMS**

See *call management system*.

**CNG tone**

See *calling tone*.

**CO**

See *central office*.

**code excited linear prediction (CELP)**

An analog-to-digital voice coding scheme.

**collocated**

A Lucent INTUITY system installed in the same physical location as the host switch. See also *local installation*.

**collocated adjunct**

Two or more adjuncts that are serving the same switch (that is, each has voice port connections to the switch) or that are serving different switches but can be networked through a direct RS-232 connection due to their proximity.

**comcode**

A numbering system for telecommunications equipment used by Lucent. Each comcode is a nine-digit number that represents a specific piece of hardware, software, or documentation.

**command**

An instruction or request given by the user to the software to perform a particular function. An entire command consists of the command name and options. Also, one- or two-key touch tones that control a mailbox activity or function.

**community**

A group of telephone users administered with special send and receive messaging capabilities. A community is typically comprised of people who need full access to each other by telephone on a frequent basis. See also *default community*.

**compound message**

A message that combines a voice message and a fax message into one unit, which INTUITY AUDIX then handles as a single message.

**configuration**

The particular combination of hardware and software components selected for a system, including external connections, internal options, and peripheral equipment.

**controller circuit card**

A circuit card used on a computer system that controls its basic functionality and makes the system operational. These cards are used to control magnetic peripherals, video monitors, and basic system communications.

**COS**

See *class of service*.

**coverage path**

The sequence of alternate destinations to which a call to a user on an Lucent INTUITY system is automatically sent when it is not answered by the user. This sequence is set up on the switch, normally with the Lucent INTUITY system as the last or only destination.

**CPU**

See *central processing unit*.

**cross connect**

Distribution-system equipment used to terminate and administer communication circuits.

**cross connection**

The connection of one wire to another, usually by anchoring each wire to a connecting block and then placing a third wire between them so that an electrical connection is made.

**CSI**

See *called subscriber information*.

**CTS**

See *clear to send*.

---

## D

**DAC**

See *dial access code*.

**database**

A structured set of files, records, or tables. Also, a collection of filesystems and files in disk memory that store the voice and nonvoice (program data) necessary for Lucent INTUITY system operation.

**data communications equipment (DCE)**

Standard type of data interface normally used to connect to data terminal equipment (DTE) devices. DCE devices include the data service unit (DSU), the isolating data interface (IDI), and the modular processor data module (MPDM).

**data communications interface unit (DCIU)**

A switch device that allows nonvoice (data) communication between a Lucent INTUITY system and a Lucent switch. The DCIU is a high-speed synchronous data link that communicates with the common control switch processor over a direct memory access (DMA) channel that reads data directly from FP memory.

**data link**

A term used to describe the communications link used for data transmission from a source to a destination, for example, a telephone line for data transmission.

**data service unit (DSU)**

A device used to access digital data channels. DATAPHONE II 2500 DSUs are synchronous data communications equipment (DCE) devices used for extended-local Lucent INTUITY system connections. The 2600 or 2700 series may also be used; these support diagnostic testing and the DATAPHONE II Service network system.

**data set**

Another term for a modem, although a data set usually includes the telephone. See also *modem*.

**data terminal equipment (DTE)**

Standard type of data interface normally used for the endpoints in a connection. Normally the Lucent INTUITY system, most terminals, and the switch data link are DTE devices.

**data terminal ready (DTR)**

A control signal sent from the data terminal equipment (DTE) to the data communications equipment (DCE) that indicates the DTE is on and ready to communicate.

**DBP**

See *data base processor*.

**DCE**

See *data communications equipment*.

**DCIU**

See *data communications interface unit*.

**DCP**

See *digital communications protocol*.

**DCS**

See *distributed communications system*.

**debug**

See *troubleshoot*.

**dedicated line**

A communications path that does not go through a switch. A dedicated (hard-wired) path can be formed with directly connected cables. MPDMs, DSUs, or other devices can also be used to extend the distance that signals can travel directly through the building wiring.

**default**

A value that is automatically supplied by the system if no other value is specified.

**default community**

A group of telephone users administered with restrictions to prevent them from sending messages to or receiving messages from other communities. If a system is administered to use communities, the default community is comprised of all the AUDIX users defined on that system.

**default print number**

The user-administered extension to which autoprinted faxes are redirected upon their receipt into the user's mailbox. This default print destination is also provided as a print option when the user is manually retrieving and printing faxes from the mailbox.

**delivered message**

A message that has been successfully transmitted to a recipient's incoming mailbox.

**demand testing**

Testing performed on request (usually by service personnel).

**diagnostic testing**

A program run for testing and determining faults in the system.

**dial-ahead/dial-through**

The act of interrupting or preceding INTUITY AUDIX system announcements by typing (buffering) touch-tone commands in the order the system would normally prompt for them.

**dial string**

A series of numbers used to initiate a call to a remote AMIS machine. A dial string tells the switch what type of call is coming (local or long distance) and gives the switch time to obtain an outgoing port, if applicable

**dialed number identification service (\*DNIS\_SVC)**

An available channel service assignment on the Lucent INTUITY system. Assigning this service to a channel permits the Lucent INTUITY system to interpret information from the switch and operate the appropriate application for the incoming telephone call.

**DID**

See *direct inward dialing*.

**digital**

Discrete data or signals such as 0 and 1, as opposed to analog continuous signals.

**digital communications protocol (DCP)**

A 64-Kbps digital data transmission code with a 160-Kbps bipolar bit stream divided into two information (I) channels and one signaling (S) channel.

**digital networking**

A method of transferring messages between messaging systems in a digital format. See also *Intuity AUDIX Digital Networking*.

**digital signal processor**

A specialized digital microprocessor that performs calculations on digitized signals that were originally analog and then sends the results on.

**DIP switch**

See *dual in-line package switch*.

**direct inward dialing**

The ability for an outside caller to call an internal extension without having to pass through an operator or attendant.

**direct memory access (DMA)**

A quick method of moving data from a storage device directly to RAM, which speeds processing.

**directory**

1. An INTUITY AUDIX feature that allows you to hear a user's name and extension after pressing **[\*]** **[N]** at the activity menu.
2. A group of related files accessed by a common name in software.

**display terminal**

A data terminal with a screen and keyboard used for displaying Lucent INTUITY screens and performing maintenance or administration activities.

**distributed communications system (DCS)**

A network of two or more switches that uses logical and physical data links to provide full or partial feature transparency. Voice links are made using tie trunks.

**distribution list**

See *mailing list*.

**DMA**

See *direct memory access*.

**DNIS**

See *dialed number identification service*.

**domain**

An area where data processing resources are under common control. The AUDIX system is one domain and an e-mail system is another domain.

**DSP**

See *digital signal processor*.

**DSU**

See *data service unit*.

**DTE**

See *data terminal equipment*.

**DTMF**

See *dual tone multifrequency*.

**dual in-line package (DIP) switch**

A small switch, usually attached to a printed circuit card, in which there are only two settings: on or off (or 0 or 1). DIP switches are used to configure the card in a semipermanent way.

**dual language greetings**

The capability of INTUITY AUDIX users to create personal greetings in two different languages—one in a primary language and one in a secondary language. This capability exists when the multilingual feature is turned on and the prompts for user mailboxes can be in either of the two languages.

**dual tone multifrequency (DTMF)**

A way of signaling consisting of a pushbutton or touch-tone dial that sends out a sound consisting of two discrete tones that can be picked up and interpreted by telephone switches.

---

## E

**EIA interface**

A set of standards developed by the Electrical Industries Association (EIA) that specifies various electrical and mechanical characteristics for interfaces between electronic devices such as computers, terminals, and modems. Also known as *RS-232*.

**electrostatic discharge (ESD)**

Discharge of a static charge on a surface or body through a conductive path to ground. ESD can be damaging to integrated circuits.

**electronic mail**

See *e-mail*.

**e-mail**

The transfer of a wide variety of message types across a computer network (LAN or WAN). E-mail messages may be text messages containing only ASCII or may be complex multimedia messages containing embedded voice messages, software files, and images.

**enabled/disabled**

The state of a hardware device that indicates whether it is available for use by the Lucent INTUITY system. Devices must be equipped before they can be enabled (made active). See also *equipped/unequipped*.

**endpoint**

See *fax endpoint*.

**enhanced call transfer**

An INTUITY AUDIX feature that allows compatible switches to transmit messages digitally over the BX.25 (data) link. This feature is used for quick call transfers and requires a fully integrated digital switch. Callers can only transfer to other extensions in the switch dial plan.

**enhanced serial data interface**

A software- and hardware-controlled method used to store data on magnetic peripherals.

**equipped/unequipped**

The state of a networking channel that indicates whether Lucent INTUITY software has recognized it. Devices must be equipped before they can be enabled (made active). See also *enabled/disabled*.

**error message**

A message on the screen indicating that something is wrong and possibly suggesting how to correct it.

**errors**

Problems detected by the system during operation and recorded in the maintenance log. Errors can produce an alarm if they exceed a threshold.

**escape from reply**

The ability to quickly return to getting messages for a user who encounters a problem trying to respond to a message. To escape, the user presses **#**.

**escape to attendant**

An INTUITY AUDIX feature that allows users with the call answer feature to have a personal attendant or operator administered to pick up their unanswered calls. A system-wide extension could also be used to send callers to a live agent.

**ESD**

See *electrostatic discharge*.

**event**

An informational messages about the system's activities. For example, an event is logged when the system is rebooted. Events may or may not be related to errors and alarms.

## **F**

### **facility out-of-service**

State of operation during which the current channel is not receiving a dial tone and is not functioning.

### **facsimile**

1. A digitized version of written, typed, or drawn material transmitted over telephone lines and printed out elsewhere. 2. Computer-generated text or graphics transmitted over computer networks. A computer-generated fax is typically printed to a fax machine but can remain stored electronically.

### **fax**

See *facsimile*.

### **fax addressing prefix**

Uniquely identifies a particular fax endpoint to the Lucent INTUITY system. Used by the system as a "template" to differentiate all call-delivery machines on the network from each other.

### **fax endpoint**

Any device capable of receiving fax calls. Fax endpoints include fax machines, individual PC fax modems, fax ports on LAN fax servers, and ports on fax-enabled messaging systems.

### **fax print destination prefix**

A dial string that the Lucent INTUITY system adds to the fax telephone number the user enters to print a fax. The system takes the full number (fax print destination prefix + fax telephone extension) and hunts through the machine translation numbers until it finds the specific fax endpoint.

### **field**

An area on a screen, menu, or report where information can be typed or displayed.

### **FIFO**

See *first-in/first-out*.

### **file**

A collection of data treated as a basic unit of storage.

### **filename**

Alphanumeric characters used to identify a particular file.

### **file redundancy**

See *mirroring*.

### **file system**

A collection of related files (programs or data) stored on disk that are required to initialize a Lucent INTUITY system.

### **first-in/first-out (FIFO)**

A method of processing telephone calls or data in which the first call (or data) to be received is the first call (or data) to be processed.

### **F key**

See *function key*.

### **FOOS**

See *facility out-of-service*.

**format**

To set up a disk, floppy diskette, or tape with a predetermined arrangement of characters so that the system can read the information on it.

**function**

Individual steps or procedures within a mailbox activity.

**function key (F key)**

A key on a computer keyboard programmed to perform a defined function when pressed. The user interface for the Lucent INTUITY system defines keys F1 through F8.

---

## G

**Generic 1, 2, or 3**

Lucent switch system software releases, designed for serving large communities of System 75 and System 85 users.

**generic tape**

A copy of the standard software and stand-alone tape utilities that is shipped with a new Lucent INTUITY system.

**GOS**

See *grade of service*.

**grade of service (GOS)**

A parameter that describes the delays in accessing a port on the Lucent INTUITY system. For example, if the GOS is P05, 95% of the callers hear the system answer and 5% hear ringing until a port becomes available to answer the call.

**guaranteed fax**

A feature of Lucent INTUITY FAX Messaging that temporarily stores faxes sent to a fax machine. In cases where the fax machine is busy or does not answer a call, the call is sent to an INTUITY AUDIX mailbox.

**guest password**

A feature that allows callers who are not INTUITY AUDIX users to leave messages on the system by dialing a user's extension and entering a system-wide guest password.

---

## H

**hard disk drive**

A high-capacity data storage/retrieval device that is located inside a computer. A hard disk drive stores data on nonremovable high-density magnetic media based on a predetermined format for retrieval by the system at a later date.

**hardware**

The physical components of a computer system. The central processing unit, disks, tape, and floppy drives are all hardware.

**header**

Information that the system creates to identify a message. A message header includes the originator or recipient, type of message, creation time, and delivery time.

**help**

A command run by pressing **HELP** or **CTRL ?** on a Lucent INTUITY display terminal to show the options available at your current screen position. In the INTUITY AUDIX system, press **\* (H)** on the telephone keypad to get a list of options. See also *on-line help*.

**hertz (Hz)**

A measurement of frequency in cycles per second. A hertz is 1 cycle per second.

**host switch**

The switch directly connected to the Lucent INTUITY system over the data link. Also, the physical link connecting a Lucent INTUITY system to a distributed communications system (DCS) network.

**hunt group**

A group of analog ports on a switch usually administered to search for available ports in a circular pattern.

**Hz**

See *hertz*.

---

## I

**I/O**

Input/output.

**IDI**

See *isolating data interface*.

**IMAPI**

See *INTUITY messaging application programming interface*.

**INADS**

See *initialization and administration system*.

**information service**

See *bulletin board*.

**initialization**

The process of bringing a system to a predetermined operational state. The start-up procedure tests hardware; loads the boot filesystem programs; locates, mounts, and opens other required filesystems; and starts normal service.

**initialization and administration system (INADS)**

A computer-aided maintenance system used by remote technicians to track alarms.

**initialize**

To start up the system for the first time.

**input**

A signal fed into a circuit or channel.

**integrated services digital network (ISDN)**

A network that provides end-to-end digital connectivity to support a wide range of voice and data services.

**integrated voice processing CELP (IVC6) card**

A computer circuit card that supports both fax processing and voice processing capabilities. It provides two analog ports to support six analog channels. All telephone calls to and from the Lucent INTUITY system are processed through the IVC6 card.

**interface**

The device or software that forms the boundary between two devices or parts of a system, allowing them to work together. See also *user interface*.

**internal e-mail**

Software on a PC that provides messaging capability between users on the same AUDIX system, or to administered remote AUDIX systems and users. Users can create, send, and receive a message that contains multiple media types; specifically, voice, fax, text, or file attachments (software files, such as a word processing or spreadsheet file).

**interrupt request (IRQ)**

Within a PC, a signal sent from a device to the CPU to temporarily suspend normal processing and transfer control to an interrupt handling routine.

**INTUITY AUDIX Digital Networking**

A Lucent INTUITY feature that allows customers to link together up to 500 remote Lucent INTUITY machines for a total of up to 500,000 remote users. See also *digital networking*.

**INTUITY Message Manager**

A Windows-based software product that allows INTUITY AUDIX users to receive, store, and send their voice/FAX messages from a PC. The software also enables users to create and send multimedia messages that include voice, fax, file attachments, and text.

**INTUITY messaging application programming interface (IMAPI)**

A software function-call interface that allows INTUITY AUDIX to interact with Lucent INTUITY Message Manager.

**I/O address**

input/output address.

**IRQ**

See *interrupt request*.

**ISDN**

See *integrated services digital network*.

**isolating data interface (IDI)**

A synchronous, full duplex data device used for cable connections between a Lucent INTUITY GPSC-AT/E card and the switch data communications interface unit (DCIU).

**IVC6**

See *integrated voice processing CELP (IVC6) card*.

---

**J**

**jumper**

Pairs or sets of small prongs or pins on circuit cards and mother boards the placement of which determines the particular operation the computer selects. When two pins are covered, an electrical circuit is completed. When the jumper is uncovered, the connection is not made. The computer interprets these electrical connections as configuration information.

---

## K

### **Kbps**

Kilobits per second; one thousand bits per second.

### **Kbyte**

Kilobytes per second; 1024 thousand bytes per second.

---

## L

### **label**

The name assigned to a disk device (either a removable tape cartridge or permanent drive) through software. Cartridge labels may have a generic name (such as 3:3) to show the software release, or a descriptive name if for back-up copies (such as back01). Disk drive labels usually indicate the disk position (such as disk00 or disk02).

### **LAN**

See *local area network*.

### **last-in/first-out (LIFO)**

A method of processing telephone calls or data in which the last call (or data) received is the first call (or data) to be processed.

### **LCD**

See *liquid crystal display*.

### **leave word calling (LWC)**

A switch feature that allows the calling party to leave a standard (nonvoice) message for the called party using a feature button or dial access code.

### **LED**

See *light emitting diode*.

### **LDAP**

See *lightweight directory access protocol*.

### **leave word calling (LWC)**

A switch feature that allows the calling party to leave a standard (nonvoice) message for the called party using a feature button or dial access code.

### **LED**

See *light emitting diode*.

### **LIFO**

See *last-in/first-out*.

### **light emitting diode (LED)**

A light on the hardware platform that shows the status of operations.

### **lightweight directory access protocol (LDAP)**

A protocol used to create a global database made up of local databases, each which holds part of the data.

**LIFO**

See *last-in/first-out*.

**light emitting diode (LED)**

A light on the hardware platform that shows the status of operations.

**liquid crystal display (LCD)**

The 10-character alphanumeric display that shows the status of the system, including alarms.

**load**

The process of reading software from external storage (such as disk) and placing a copy in system memory.

**local area network (LAN)**

A network of PCs that communicate with each other and that normally share the resources of one or more servers. Operation of Lucent INTUITY Message Manager requires that the INTUITY AUDIX system and the users' PCs be on a LAN.

**local AUDIX machine**

The Lucent INTUITY system where a user's INTUITY AUDIX mailbox is located. All users on this home machine are called *local users*.

**local installation**

A switch, adjunct, or peripheral installed physically near the host switch or system. See also *collocated*.

**local network**

An INTUITY AUDIX Digital Network in which all Lucent INTUITY systems are connected to the same switch.

**login**

A unique code a user must enter to gain approved access to the Lucent INTUITY system. See also *password*.

**login announcement**

A feature enabling the system administrator and other designated users to create a mail message that is automatically played to all INTUITY AUDIX users every time they log in to the system.

**Lotus Notes**

Information management software for work groups that allows individuals to share and manipulate information over a local or wide area network

**LWC**

See *leave word calling*.

---

**M**

**magnetic peripherals**

Data storage devices that use magnetic media to store information. Such devices include hard disk drives, floppy disk drives, and cartridge tape drives.

**mailbox**

A portion of disk memory allotted to each Lucent INTUITY system user for creating and storing outgoing and incoming messages.

**mailing list**

A group of user addresses assigned a list ID# and public or private status. A mailing list may be used to simplify the sending of messages to several users.

**maintenance**

The process of identifying system errors and correcting them, or taking steps to prevent problems from occurring.

**major alarm**

An alarm detected by Lucent INTUITY software that affects at least one fourth of the INTUITY ports in service. Often a major alarm indicates that service is affected.

**MANOOS**

See *manually out-of-service*.

**manually out-of-service**

State of operation during which a unit has been intentionally taken out of service.

**MAP**

See *multi-application platform*.

**mean time between failures**

The average time a manufacturer estimates will elapse before a failure occurs in a component or system.

**media type**

The form a message takes. The media types supported by the Lucent INTUITY system are voice, text, file attachments, and fax.

**megabyte**

A unit of memory equal to 1,048,576 bytes (1024 x 1024). It is often rounded to 1 million.

**memory**

A device that stores logic states such that data can be accessed and retrieved. Memory may be temporary (such as system RAM) or permanent (such as disk).

**menu**

A list of options displayed on a computer terminal screen or spoken by a voice processing system. Users choose the option that reflects what action they want the system to take.

**menu tree**

The way in which nested automated attendants are set up.

**message categories**

Groups of messages in INTUITY AUDIX users' mailboxes. Categories include *new*, *unopened*, and *old* for the incoming mailbox and *delivered*, *accessed*, *undelivered*, *undeliverable* (not deliverable), and *file cabinet* for the outgoing mailbox.

**message component**

A media type included in a multimedia message. These types include voice, text, file attachments, and fax messages.

**message delivery**

An optional Lucent INTUITY feature that permits users to send messages to any touch-tone telephone, as long as the telephone number is in the range of allowable numbers. This feature is an extension of the AMIS analog networking feature and is automatically available when the AMIS feature is activated.

**Message Manager**

See *INTUITY Message Manager*.

**message-waiting indicator (MWI)**

An indicator that alerts Lucent INTUITY users that they have received new mail messages. An MWI can be an LED or neon lamp, or an audio tone (stutter dial tone).

**message waiting lamp (MWL)**

See *message-waiting indicator*.

**migration**

An installation that moves data to the Lucent INTUITY system from another type of Lucent messaging system, for example, from AUDIX R1, DEFINITY AUDIX, or AUDIX Voice Power.

**minor alarm**

An alarm detected by maintenance software that affects less than one fourth of the Lucent INTUITY ports in service, but has exceeded error thresholds or may impact service.

**mirroring**

A Lucent INTUITY system feature that allows data from crucial filesystems to be continuously copied to back-up (mirror) filesystems while the system is running. If the system has some problem where an original filesystem cannot be used, the backup filesystem is placed in service automatically.

**mode code**

A string of touch-tones from a MERLIN LEGEND switch. A mode code may send the INTUITY AUDIX system information such as call type, calling party, called party, and on/off signals for message waiting indicators.

**modem**

A device that converts data from a form that is compatible with data processing equipment (digital) to a form compatible with transmission facilities (analog), and vice-versa.

**modular**

A term that describes equipment made of plug-in units that can be added together to make the system larger, improve its capabilities, or expand its size.

**modular processor data module (MPDM)**

A data device that converts RS-232C or RS-449 protocol signals to digital communications protocol (DCP) used by System 75/85, Generic1, and Generic 3 switches. MPDMs may connect the Lucent INTUITY system to a switch DCIU or SCI link or connect terminals to a switch port card.

**MPDM**

See *modular processor data module*.

**MTBF**

See *mean time between failures*.

**multi-application platform (MAP)**

The computer hardware platform used by the Lucent INTUITY system.

**multilingual feature**

A feature that allows announcement sets to be active simultaneously in more than one language on the system. Mailboxes can be administered so that users can hear prompts in the language of their choice.

**MWI**

See *message-waiting indicator*.

**MWL**

See *message waiting lamp*.

---

## N

### **networking**

See *INTUITY AUDIX Digital Networking*.

### **networking prefix**

A set of digits that identifies a Lucent INTUITY machine.

### **night attendant**

The automated attendant created on a MERLIN LEGEND switch that automatically becomes active during off-hours. The night attendant substitutes for one or more daytime attendants.

### **not deliverable message**

A message that could not be delivered after a specified number of attempts. This usually means that the user's mailbox is full.

---

## O

### **off-hook**

See *switch hook*.

### **on-hook**

See *switch hook*.

### **on-line help**

A Lucent INTUITY system feature that provides information about user interface windows, screens, and menus by pressing a predetermined key. See also *help*.

### **open systems interconnection (OSI)**

An internationally accepted framework of standards for communication between systems made by different vendors.

### **operating system (OS)**

The set of software programs that runs the hardware and interprets software commands.

### **option**

A choice selected from a menu, or an argument used in a command line to specify program output by modifying the execution of a command. When you do not specify any options, the command executes according to its default options.

### **OS**

See *operating system*.

### **OSI**

See *open systems interconnection*.

### **outcalling**

A Lucent INTUITY system feature that allows the system to dial users' numbers to inform them they have new messages.

### **outgoing mailbox**

A storage area on the Lucent INTUITY system where users can keep copies of messages for future reference or action.

## P

### **parallel transmission**

The transmission of several bits of data at the same time over different wires. Parallel transmission of data is usually faster than serial transmission.

### **password**

1. A word or character string recognized automatically by the Lucent INTUITY system that allows a user access to his/her mailbox or a system administrator access to the system data base. 2. An alphanumeric string assigned to local and remote networked machines to identify the machines or the network. See also *login*.

### **password aging**

An INTUITY AUDIX feature that allows administrators to set a length of time after which a user's AUDIX password or the administrator's system password expires. The user or administrator must then change the password.

### **PBX**

See *private branch exchange*.

### **PC**

See *power converter*.

### **PDM (processor data module)**

See *modular processor data module (MPDM)*.

### **PEC**

See *price element code*.

### **peripheral device**

Equipment such as a printer or terminal that is external to the Lucent INTUITY cabinet but necessary for full operation and maintenance of the system. Also called a *peripheral*.

### **personal directory**

An INTUITY AUDIX feature that allows each user to create a private list of customized names.

### **personal fax extension**

See *secondary extension*.

### **pinouts**

The signal description per pin number for a particular connector.

### **PMS**

See *property management system*.

### **port**

A connection or link between two devices that allows information to travel to a desired location. For example, a switch port connects to a Lucent INTUITY voice port to allow a caller to leave a message.

### **POST**

See *power-on self test*.

### **power on self test (POST)**

A set of diagnostics stored in ROM that tests components such as disk drives, keyboard, and memory each time the system is booted. If problems are identified, a message is sent to the screen.

**priority call answer**

An INTUITY AUDIX feature that allows users to designate a call answer message as a priority message. To make a message a priority message, the caller presses (2) after recording.

**priority messaging**

An INTUITY AUDIX feature that allows some users to send messages that are specially marked and preferentially presented to recipients. See also *priority outcalling*.

**priority outcalling**

An INTUITY AUDIX feature that works with the priority messaging feature by allowing the message recipient to elect to be notified by outcalling only when a priority message has been received. See also *priority messaging*.

**private branch exchange (PBX)**

An analog, digital, or electronic telephone switching system where data and voice transmissions are not confined to fixed communications paths, but are routed among available ports or channels. See also *switch*.

**private mailing list**

A list of addresses that only the Lucent INTUITY system user who owns it can access.

**private messaging**

A feature of INTUITY AUDIX that allows a user to send a message that cannot be forwarded by the recipient.

**processor data module (PDM)**

See *modular processor data module (MPDM)*.

**processor interface (PI)**

A System 75, Generic 1, Generic 3i, Generic 3s, and Generic 3vs switch data link. Also called *processor interface board (PIB)*.

**programmed function key**

See *function key*.

**protocol**

A set of conventions or rules governing the format and timing of message exchanges (signals) to control data movement and the detection and possible correction of errors.

**public mailing list**

A list of addresses that any INTUITY AUDIX user can use if that user knows the owner's list ID number and extension number. Only the owner can modify a public mailing list.

**pulse-to-tone converter**

A device connected to the switch that converts signals from a rotary pulses to touch tones. This device allows callers to use rotary telephones to access options in a Lucent INTUITY user's mailbox or in an automated attendant.

---

## R

**RAM**

See *random access memory*.

**random access memory (RAM)**

The memory used in most computers to store the results of ongoing work and to provide space to store the operating system and applications that are actually running at any given moment.

**read-only memory (ROM)**

A form of computer memory that allows values to be stored only once; after the data is initially recorded, the computer can only read the contents. ROM is used to supply constant code elements such as bootstrap loaders, network addresses, and other more or less unvarying programs or instructions.

**reboot**

See *boot*.

**remote access**

Sending and receiving data to and from a computer or controlling a computer with terminals or PCs connected through communications (that is, telephone) links.

**remote installation**

A system, site, or piece of peripheral equipment that is installed in a different location from the host switch or system.

**remote maintenance**

The ability of Lucent personnel to interact with a remote computer through a telephone line or LAN connection to perform diagnostics and some system repairs. See also *remote service center*.

**remote network**

A network in which the systems are integrated with more than one switch.

**remote service center**

A Lucent or Lucent-certified organization that provides remote support to Lucent INTUITY customers. Depending upon the terms of the maintenance contract, your remote service center may be notified of all major and minor alarms and have the ability to remotely log in to your system and remedy problems. See also *remote maintenance*.

**remote terminal**

A terminal connected to a computer over a telephone line.

**remote users**

INTUITY AUDIX users whose mailboxes reside on a remote INTUITY AUDIX Digital Networking machine.

**REN**

See *ringer equivalence number*.

**reply loop escape**

An INTUITY AUDIX feature that allows a user the option of continuing to respond to a message after trying to reply to a nonuser message.

**reply to sender**

An INTUITY AUDIX feature that allows users to immediately place a call to the originator of an incoming message if that person is in the switch's dial plan.

**request to send (RTS)**

One of the control signals on an EIA-232 connector that places the modem in the originate mode so that it can begin to send.

**restart**

1. A Lucent INTUITY feature that allows INTUITY AUDIX users who have reached the system through the call answer feature to access their own mailboxes by entering the **\*R** (Restart) command. This feature is especially useful for long-distance calls or for users who want to access the Lucent INTUITY system when all the ports are busy. 2. The reinitialization of certain software, for example, *restarting* the messaging system.

**restore**

The process of recovering lost or damaged files by retrieving them from available back-up tapes, floppy diskette, or another disk device.

**retention time**

The amount of time messages are saved on disk before being automatically deleted from a user's mailbox.

**reusable upgrade kit (RUK)**

A package shipped to the customer's site prior to an upgrade that contains materials the technician needs to complete the installation. This package includes an A/B switch box, a keyboard, a 25-foot coaxial cable, two T adapters, and terminations to a LAN circuit card. It remains the property of Lucent once the installation is finished.

**right-to-use (RTU) fee**

A charge to the customer to access certain functions or capacities that are otherwise restricted, for example, additional voice or networking ports or hours of speech storage. Lucent personnel can update RTU parameters either at the customer's site or remotely via a modem.

**ringer equivalence number (REN)**

A number required in the United States for registering your telephone equipment with a service provider.

**ROM**

See *read-only memory*.

**RS-232**

See *EIA interface*.

**RTS**

See *request to send*.

---

## S

**SCA**

See *switch communications adapter*.

**scan**

To automatically play mail messages, headers, or both.

**scheduled delivery time**

A time and/or date that an INTUITY AUDIX user can assign to a message that tells the system when to deliver it. If a delivery time is omitted, the system sends the message immediately.

**screen**

That portion of the Lucent INTUITY user interface through which most administrative tasks are performed. Lucent INTUITY screens request user input in the form of a command from the `enter command:` prompt.

**SCSI**

See *small computer system interface*.

**secondary extension**

A second, fax-dedicated extension that directs incoming faxes directly into a user's mailbox without ringing the telephone. The secondary extension shares the same mailbox as the voice extension, but acts like a fax machine. Also called *personal fax extension*.

**serial transmission**

The transmission of one bit at a time over a single wire.

**server**

A computer that processes and stores data that is used by other smaller computers. For Lucent INTUITY Message Manager, INTUITY AUDIX is the server. See also *client*.

**shielded cables**

Cables that are protected from interference with metallic braid or foil.

**SID**

See *switch integration device*.

**SIMM**

See *single in-line memory module*.

**simplified message service interface (SMSI)**

Type of data link connection to an integrated 1A ESS or 5ESS switch in the Lucent INTUITY system.

**single in-line memory module (SIMM)**

A method of containing random access memory (RAM) chips on narrow strips that attach directly to sockets on the CPU circuit card. Multiple SIMMs are sometimes installed on a single CPU circuit card.

**small computer systems interface (SCSI)**

An interface standard defining the physical, logical, and electrical connections to computer system peripherals such as tape and disk drives.

**SMSI**

See *simplified message service interface*.

**subscriber**

A Lucent INTUITY user who has been assigned the ability to access the INTUITY AUDIX Voice Messaging system.

**surge**

A sudden rise and fall of voltage in an electrical circuit.

**surge protector**

A device that plugs into the telephone system and the commercial AC power outlet to protect the telephone system from damaging high-voltage surges.

**SW**

See *switch integration*.

**switch**

An automatic telephone exchange that allows the transmission of calls to and from the public telephone network. See also *private branch exchange (PBX)*.

**switched access**

A connection made from one endpoint to another through switch port cards. This allows the endpoint (such as a terminal) to be used for several applications.

**switch hook**

The device at the top of most telephones which is depressed when the handset is resting in the cradle (that is, when the telephone is *on hook*). This device is raised when the handset is picked up (that is, when the telephone is *off hook*).

**switch-hook flash**

A signaling technique in which the signal is originated by momentarily depressing the switch hook.

**switch integration**

Sharing of information between a messaging system and a switch to provide a seamless interface to callers and system users. A fully integrated INTUITY AUDIX system, for example, answers each incoming telephone call with information taken directly from the switch. Such information includes the number being called and the circumstances under which the call was sent to it, for example, covered from a busy or unanswered extension.

**switch integration device (SID)**

A combination of hardware and software that passes information from the switch to the Lucent INTUITY system thus allowing it to share information with non-Lucent switches. The operation of a SID is unique to the particular switch with which it interfaces.

**switch network**

Two or more interconnected switching systems.

**synchronized mailbox**

A mailbox that is paired with a corresponding mailbox in another domain and linked via software that keeps track of changes to either mailbox. When the contents of one mailbox change, the software replicates that change in the other mailbox.

**synchronizer**

The name given to the trusted server by the e-mail vendor, Lotus Notes.

**synchronous communication**

A method of data transmission in which bits or characters are sent at regular time intervals, rather than being spaced by start and stop bits. See also *asynchronous communication*.

**synchronous transmission**

A type of data transmission where the data characters and bits are exchanged at a fixed rate with the transmitter and receiver synchronized. This allows greater efficiency and supports more powerful protocols.

**system configuration**

See *configuration*.

---

## T

**T.30**

The standard for Group III fax machines that covers the protocol used to manage a fax session and negotiate the capabilities supported by each fax endpoint.

**tape cartridge**

One or more spare removable cartridges required to back up system information.

**tape drive**

The physical unit that holds, reads, and writes to magnetic tape.

**TCP/IP**

See *transmission control protocol/internet program*.

**TDD**

See *telecommunications device for the deaf*.

**TDM**

See *time division multiplexing*.

**telecommunications device for the deaf (TDD)**

A device with a keyboard and display unit that connects to or substitutes for a telephone. The TDD allows a deaf or hearing-impaired person to communicate over the telephone lines with other people who have TDDs. It also allows a deaf person to communicate with the INTUITY AUDIX system.

**terminal**

See *display terminal*.

**terminal type**

A number indicating the type of terminal from which a user is logging in to the Lucent INTUITY system. Terminal type is the last required entry before gaining access to the Lucent INTUITY display screens.

**terminating resistor**

A grounding resistor placed at the end of a bus, line, or cable to prevent signals from being reflected or echoed.

**time division multiplexing (TDM)**

A method of serving multiple channels simultaneously over a common transmission path by assigning the transmission path sequentially to the channels, with each assignment being for a discrete time interval.

**tip/ring**

A term used to denote the analog telecommunications interface.

**tone generator**

A device acoustically coupled to a rotary telephone used to produce touch-tone sounds.

**traffic**

The flow of attempts, calls, and messages across a telecommunications network.

**translations**

Software assignments that tell a system what to expect on a certain voice port or the data link, or how to handle incoming data. Translations customize the Lucent INTUITY system and switch features for users.

**transmission control protocol/internet protocol (TCP/IP)**

A suite of protocols that allow disparate hosts to connect over a network. Transmission control protocol (TCP) organizes data on both ends of a connection and ensures that the data that arrives matches that which was sent. Internet protocol (IP) ensures that a message passes through all the necessary routers to the proper destination.

**T/R**

See *tip/ring*.

**troubleshooting**

The process of locating and correcting errors in computer programs (also called *debugging*) or systems.

**trusted server**

A server that uses IMAPI to access an INTUITY AUDIX mailbox on behalf of a user and is empowered to do everything to a user message that INTUITY AUDIX can do.

## U

### UCD

See *uniform call distribution*.

### Undelete

An INTUITY AUDIX feature that allows users to restore the last message deleted by pressing **\*U**.

### undelivered message

A message that has not yet been sent to an INTUITY AUDIX user's incoming mailbox. The message resides in the sender's outgoing mailbox and may be modified or redirected by the sender.

### Unequipped

See *equipped/unequipped*.

### unfinished message

A message that was recorded but not approved or addressed, usually as the result of an interrupted INTUITY AUDIX session. Also called *working message*.

### uniform call distribution (UCD)

The type of call-distribution group (or hunt group) of analog port cards on some switches that connects users to the INTUITY AUDIX system. System 75, Generic 1, Generic 3, and some central office switches use UCD groups. See also *call-distribution group*.

### uninterruptable power supply (UPS)

An auxiliary power unit that provides continuous power in cases where commercial power is lost.

### UNIX operating system

A multi-user, multi-tasking computer operating system.

### upgrade

An installation that moves a Lucent INTUITY system to a newer release.

### untouched message

An INTUITY AUDIX feature that allows a user to keep a message in its current category by using the **\* \* H** (Hold) command. If the message is in the new category, message-waiting indication remains active (for example, the message-waiting lamp remains lit).

### UPS

See *uninterruptable power supply*.

### U. S. 123

An alternate announcement set in U. S. English whose prompts use numbers, not letters, to identify telephone keypad presses. For example, a prompt might say, "Press star three," instead of, "Press star D."

### user interface

The devices by which users access their mailboxes, manage mailing lists, administer personal greetings, and use other messaging capabilities. Types of user interfaces include a touch-tone telephone keypad and a PC equipped with Lucent INTUITY Message Manager.

### user population

A combination of different types of users on which Lucent INTUITY configuration guidelines are based.

---

## V

**vector**

A customized program in the switch for processing incoming calls.

**voice link**

The Lucent INTUITY analog connection(s) to a call-distribution group (or hunt group) of analog ports on the switch.

**voice mail**

See *voice message*.

**voice mailbox**

See *mailbox*.

**voice message**

Digitized information stored by the Lucent INTUITY system on disk memory. Also called *voice mail*.

**voice port**

The IVC6 port that provides the interface between the Lucent INTUITY system and the analog ports on the switch.

**voice terminal**

A telephone used for spoken communications with the Lucent INTUITY system. A touch-tone telephone with a message-waiting indicator is recommended for INTUITY AUDIX users.

**voicing**

1. Speaking a message into the Lucent INTUITY system during recording. 2. Having the system play back a message or prompt to a user.

**volt**

The unit of electromotive force required to produce a current of 1 ampere through a resistance of 1 ohm.

---

## W

**WAN**

See *wide area network*.

**watt**

The unit of electrical power required to maintain a current of 1 amp under the pressure of 1 volt.

**wide area network (WAN)**

A data network typically extending a local area network (LAN) over telephone lines to link with LANS in other buildings and/or geographic locations.

**window**

That portion of the Lucent INTUITY user interface through which you can view system information or status.

# Index

---

## Numerics

---

10-digit caller information, 7  
4410 emulato, 6

---

## A

acceptance tests, 67  
  add test subscribers, 71  
  adjunct transfers, 76  
  call answer, 74  
  link status, 68  
  mailbox access VDN, 75  
  ping, 68  
  prerequisites, 68  
  remote update, 72  
  remove test subscribers, 77  
  verify emergency call answer, 75  
access, single number, 3  
add  
  client link, 21  
  service to called number, 37, 59  
  stations for adjunct modules, 28  
  test subscribers, 71  
  to local host tables, 18, 20  
add subscriber command, 71  
add vdn command, 32  
adjunct link stations, 26  
adjunct module, 1, 48  
  adding stations for, 28  
adjunct transfers, 76  
administration  
  DEFINITY G3V4  
    adding stations, 28  
    create mailbox access vector, 31  
    create vector for Intuity, 30  
    define coverage path, 35  
    verify ASAI feature settings, 25  
    verify ASAI/adjunct link stations, 26  
  DEFINITY LAN Gateway, 17  
    add client link, 21  
    add to local host table, 18, 20  
    check ASAI link, 24  
  high capacity option  
    AUDIX machine, 42  
    switch adjunct control module, 48  
    switch adjunct module, 46  
  Intuity AUDIX  
    add service to called number, 37, 59  
    set community sending restrictions, 38

    planning, 13  
  administration access, 6  
  Administration Log screen, 74  
  architecture, view, 2  
  ASAI  
    feature settings, 25  
    links, 26  
  ASAI link, 24  
  ASCEND, 2  
  Automated Attendant  
    examples, 62  
    main auto-attendant  
      example, 62  
    nested attendants  
      setting up, 63  
    recording menu greetings, 62

---

## B

BayStack, 2  
Brouter administration, 21

---

## C

call answer, testing, 74  
call flows  
  call answer, 8  
  mailbox access, 10  
called number, add service to, 37, 59  
caller information, 6  
change coverage path command, 35  
change system parameters command, 38  
change vector command, 31  
check ASAI link, 24  
client link, 21  
commands  
  add agent-login ID, 83  
  add hunt-group, 80  
  add station, 28  
  add vdn, 32  
  change coverage path, 35  
  change system parameters, 38  
  get remote\_updates, 73  
  list station, 26  
community sending restrictions, 38  
configuration, high capacity option, 2  
coverage path, 35  
create test message, 74

---

## D

DCIU link, 10, 12

DCS, 6  
DEFINITY G3V4  
  administration  
    add station for adjunct modules, 28  
    create mailbox access vector, 31  
    create vector for Intuity, 30  
    define coverage path, 35  
    verify ASAI feature settings, 25  
    verify ASAI/adjunct link stations, 26  
DEFINITY LAN Gateway  
  administration  
    add client link, 21  
    check ASAI link, 24  
    local host tables, 18, 20  
  test link status, 68

---

## E

EAS, 9, 15  
emergency call answer, 5, 10, 75  
  limitations, 5  
emulator software, 6  
enhanced availability, 4  
Expert Agent Selection, 9, 15

---

## F

fax support, 5  
Feature activation  
  extension addressing, 55  
  name addressing, 55  
feature settings, ASAI, 25  
features  
  administration access, 6  
  caller information, 7  
  DCS configurations, 6  
  emergency call answer, 5  
  enhanced availability, 4  
  scalability, 4  
  single number access, 3  
field  
  administration  
    AAS?, 84  
    AUDIX, 84  
    AUDIX Name, 85  
    AUDIX NAME for Messaging, 84  
    COR, 84  
    Login ID, 84  
    LWC Reception, 84  
    Messaging Server Name for Messaging?, 85  
    Name, 84  
    Password (enter again), 84

Skill, 85  
TN, 84  
fields  
  administration  
    AAS, 81  
    ACD, 80  
    AUDIX Name, 82  
    Controlling Adjunct, 81  
    COR, 81  
    Forced Entry of Stroke Counts or Call Work Codes?, 81  
    Group Extension, 80  
    Group Name, 80  
    Group Number, 80  
    Group Type, 80  
    ISDN Caller Disp, 81  
    LWC Reception, 82  
    Measured, 81  
    Message Center, 82  
    Message Center AUDIX Name, 82  
    Messaging Server Name, 82  
    Primary, 82  
    Queue, 81  
    Queue Length, 81  
    skill, 80  
    TN, 81  
    Vector, 81

---

## G

Glossary, 89

---

## H

hardware requirements, 8  
high capacity option  
  acceptance tests, 67  
    add test subscribers, 71  
    adjunct transfers, 76  
    call answer, 74  
    mailbox access VDN, 75  
    remove test subscribers, 77  
  administration, 17, 41  
    AUDIX machine, 42  
    switch adjunct control module, 48  
    switch adjunct module, 46  
call flows  
  call answer, 8  
  mailbox access, 10  
configuration, 2  
feature description, 1

- features, 3
- hardware requirements, 8
- limitations, 9
- planning, 13
- software requirements, 8

hunt group numbers, 14

---

## I

- IMAPI, 12
- IMAPI sessions, 40
- Intuity AUDIX
  - administration
    - add service to called number, 37, 59
    - set community sending restrictions, 38
  - test link status, 68
- IP address, 13

---

## K

keyboard mappings, 6

---

## L

- LAN, administration access through, 6
- Layered automated attendant menus, setting up nested attendants, 63
- limitations,
  - emergency call answer, 5
- link stations, 26
- link status, 68
- list station command, 26
- local host tables, 18, 20

---

## M

- mailbox access VDN, 75
- mailbox access vector, 31
- MAX 200 Plus, 2

---

## N

- Nested automated attendants
  - setting up, 63

---

## P

- ping, 68
- planning, administration, 13
  - hunt group numbers, 14
  - IP address, 13
  - vector numbers, 15
- playback control, 5
- PPP server, 2

---

## R

- Recording
  - automated attendant menus, 62
- remote access, 2
- remote update, 72
- remove test subscribers, 77
- requirements, 8
- requirements, hardware and software, 8

---

## S

- scalability, 4
- Screens
  - field definitions
    - subscriber - page 1, 50, 52
    - subscriber - page 2, 54
- screens
  - G3r Hunt Group - pg 2, 82
  - High Capacity AUDIX Machine Administration, 43
  - Remote Update Request Screen, 73
  - Switch Adjunct Administration Form, 46
  - Switch Adjunct Module Control, 48
- send test message, 74
- sending restrictions, 38
- set community sending restrictions, 38
- single number access, 3
- software requirements, 8
- Subordinate automated attendant menus, setting up nested attendants, 63
- Subscriber screen
  - page 1, 50, 52
  - page 2, 54
- switch adjunct control module, 48
- switch adjunct module administration, 46
- system availability, 4

---

## T

ten-digit caller information, 6  
terminal emulation, 6  
Terranova LAN Terminal Emulation, 6  
test subscribers, 71  
    add, 71  
    remove, 77  
testing  
    add test subscribers, 71  
    adjunct transfers, 76  
    call answer, 74  
    link status, 68  
    mailbox access VDN, 75  
    ping, 68  
    prerequisites, 68  
    remove test subscribers, 77  
    verify emergency call answer, 75  
transfer permissions, 5  
transfers, testing adjunct, 76

---

## U

UCD  
    see Uniform Call Distribution, 79  
Uniform Call Distribution, 79

---

## V

vector numbers, 15  
verification  
    IMAPI sessions, 40  
verify emergency call answer, 75