

BELL SYSTEM PRACTICES
Station, Installation
and Maintenance

ADDENDUM C32.506
Issue A, 2-7-46-C

TELEPHONE SETS
STROMBERG-CARLSON

GENERAL

1.01 This addendum, which supplements Section C32.506, Issue 1, covers the connections for combined type sets, manufactured by the Stromberg-Carlson Company, where used in dial system areas.

1.02 Paragraphs 3.01 and 3.02 of this addendum replace 3.01 and 3.02 of the section and Fig. 2 is added.

3. CONNECTIONS


3.01 The connections for these telephone sets, where used in manual areas are shown in Fig.1 of the section, and, where used in dial system areas are shown in Fig.2 of this addendum.

3.02 The diagrams in Figs. 1 and 2 shows the line and ringer connections for bridging lines. Line and ringer connections for bridging and ground lines of the classes of service for which the set is used are given in Table 1.

Table 1
Ringer Leads

<u>Connections</u>	<u>Ringer Leads</u>		<u>Mtg. Cord</u>		
	<u>BK</u>	<u>R</u>	<u>R</u>	<u>GN</u>	<u>Y</u>
*Bridged	C2	3	L1	L2	G
Ring Party	C2	L2	L2	L1	G
Tip Party	L2	C2	L1	L2	G

*On bridged ringing lines strap terminal L2 to terminal G. On grounded ringing lines, omit this strap. Local ground should not be connected through to yellow mounting cord conductor on bridged ringing lines.

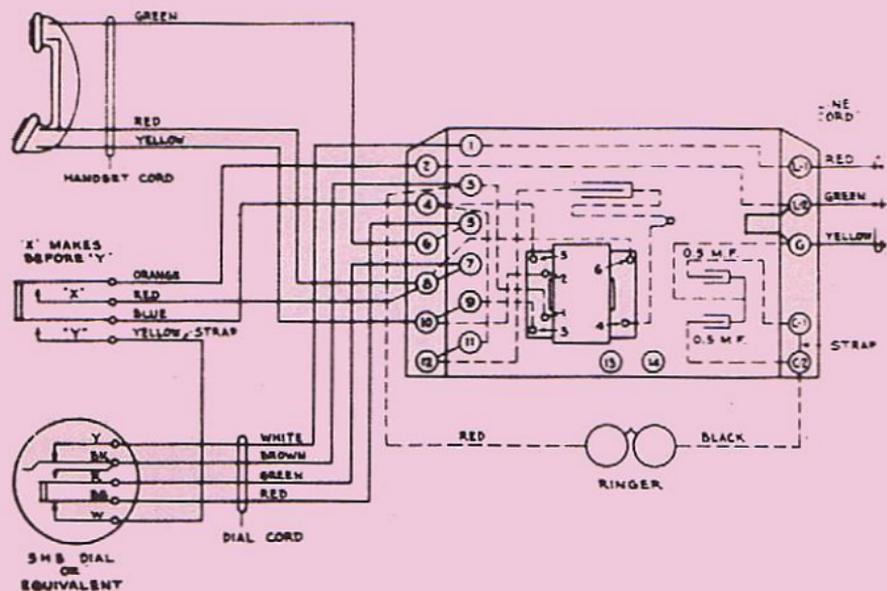

Note: To add dial: replace apparatus blank with 5HB dial or equivalent, connect dial cord as shown, disconnect green wire from hook switch and No. 6 terminal and add yellow wire strap between "W" terminal of dial and hook switch terminal from which green wire was removed. Tape or tie back ends of unused green wire of hook switch cord so that they will be out of the way of other wiring.

Fig. 2