

TELEPHONE SETS - 702B.

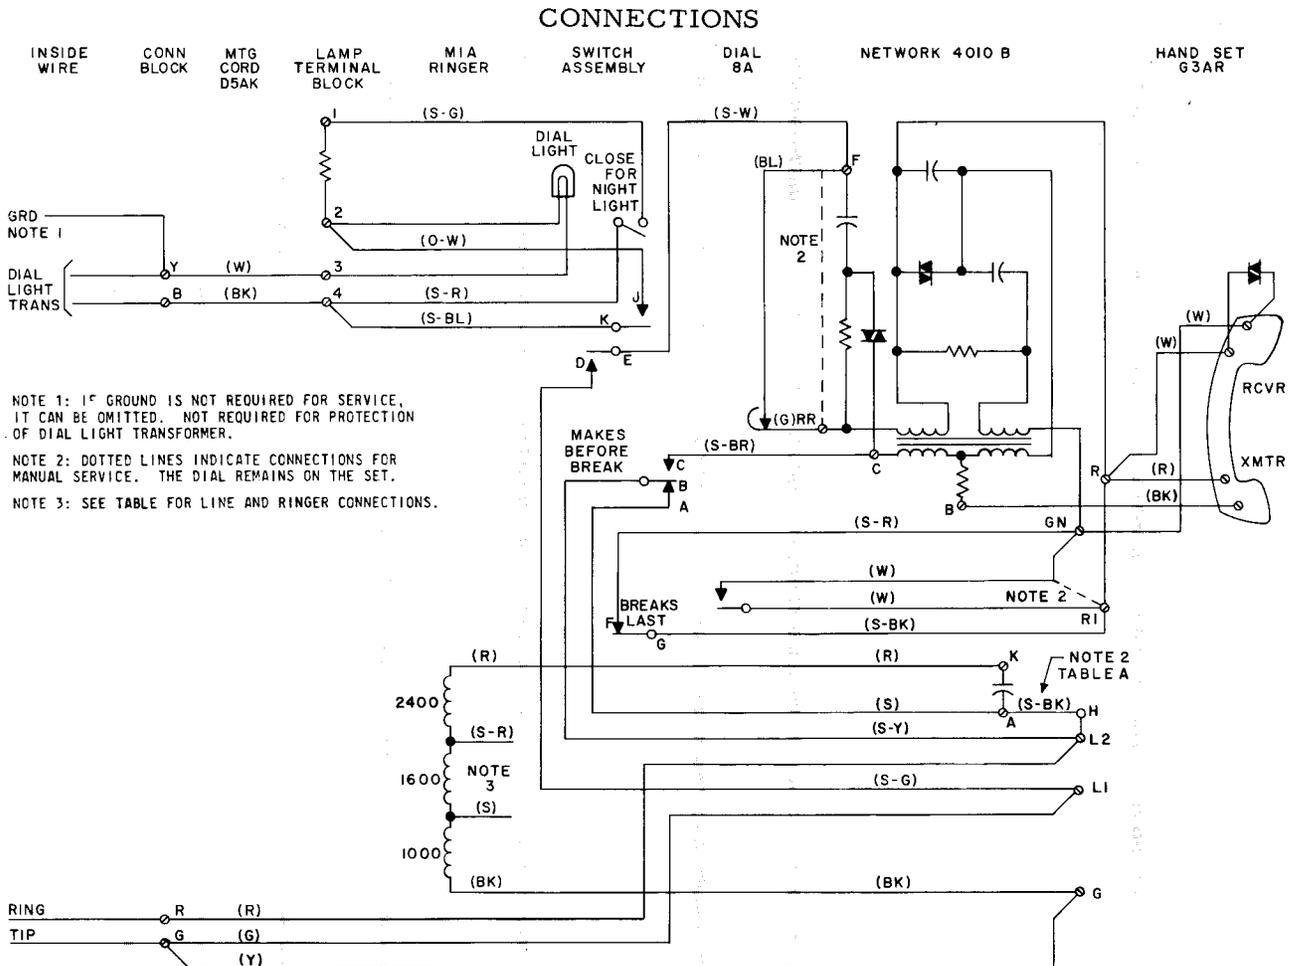


Fig. 1 - 702B Telephone Set

TABLE A - CONNECTIONS

| Class of Service | Connections at 42A Connecting Block | | | | | | | | | | Connections at Telephone Set | | | | | | | | |
|---|-------------------------------------|-----|-----|-------------|---|---------------|---|---|---|----|------------------------------|----|---|---|----|---|----|---|-----|
| | Line | | | Transformer | | Mounting Cord | | | | | Ringer | | | | | | | | |
| | Ring | Tip | Grd | 1 | 2 | R | G | Y | W | BK | R | G | Y | W | BK | R | BK | S | S-R |
| Bridged (Note 1) | R | G | | | | | | | | | | | | | | | | | |
| Ring party (Note 1) | | | | | | R | G | G | | | | | | | | | | * | |
| Tip-party except message rate | | | | | | | | | | | | | | | | | | | * |
| Tip-party dial message rate, 1000Ω (Note 2) | R | G | Y | Y | B | | | Y | B | | L2 | L1 | G | 3 | 4 | K | G | B | |
| Automatic ticketing, 2600Ω (Note 2) | | | | | | G | R | Y | | | | | | | | | | * | B |

Note 1: Connections for bridged and ring party are the same for flat and message rate.

Note 2: For tip party dial message rate or automatic ticketing service, S-BK lead shall be disconnected from terminal A of network, taped and stored.

* Furnished taped and stored. For tip party message rate or ANI service, connect as shown.

SECTION ~~C38.670-43~~

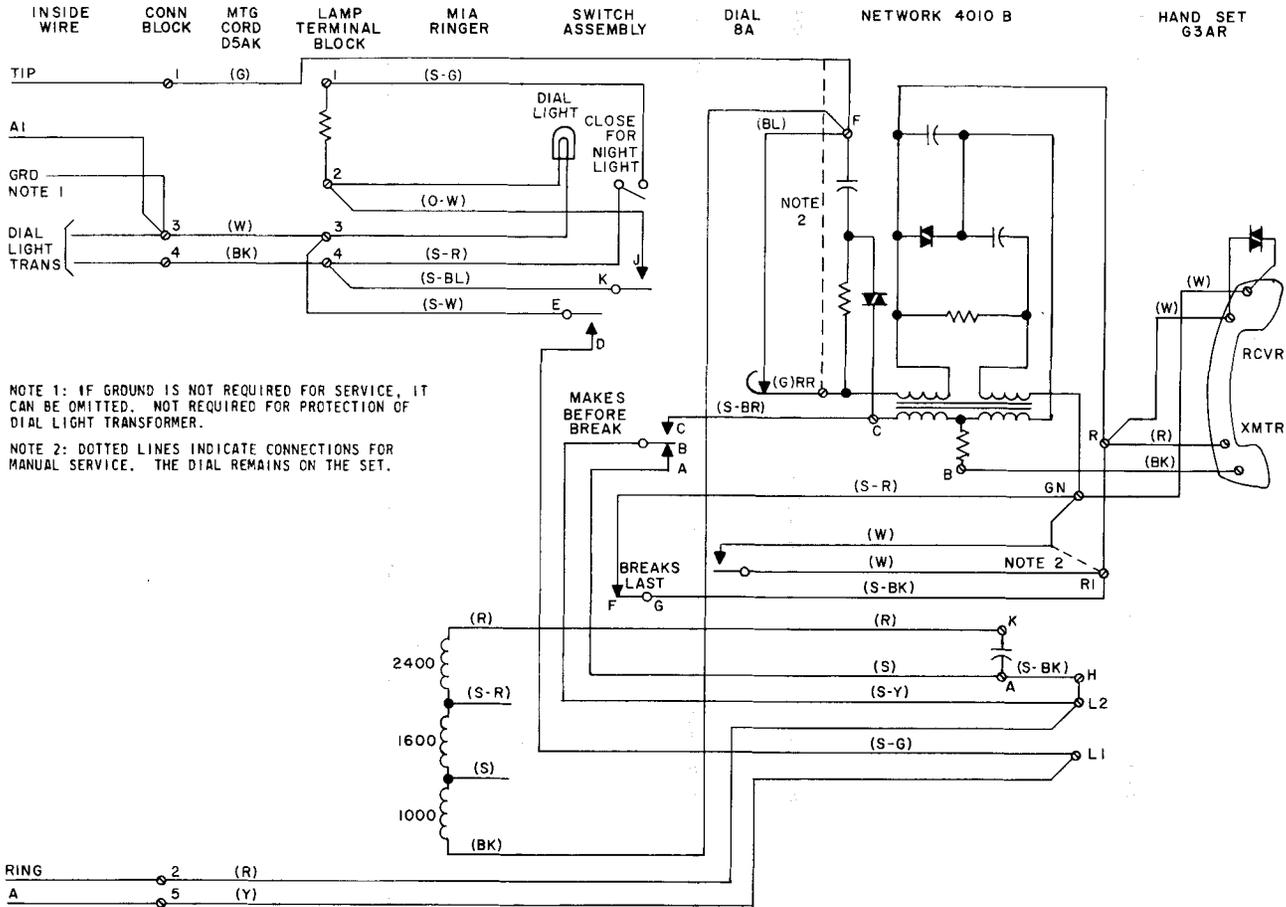


Fig. 2 - 702B Telephone Set
Used with 1A1 Key Telephone System

TABLE B
MODIFICATIONS FOR 1A1

| | Lead or Conductor | From | To |
|---------------|-------------------|------|----|
| Mounting Cord | G | L1 | F |
| | Y | G | L1 |
| Ringer | BK | G | F |
| Switchhook | S-W | F | 3 |



To prevent false holding condition when handset is restored, switch contacts CB must break before DE breaks.

Note: If ground is not required for service, it can be omitted. Not required for protection of dial light transformer.

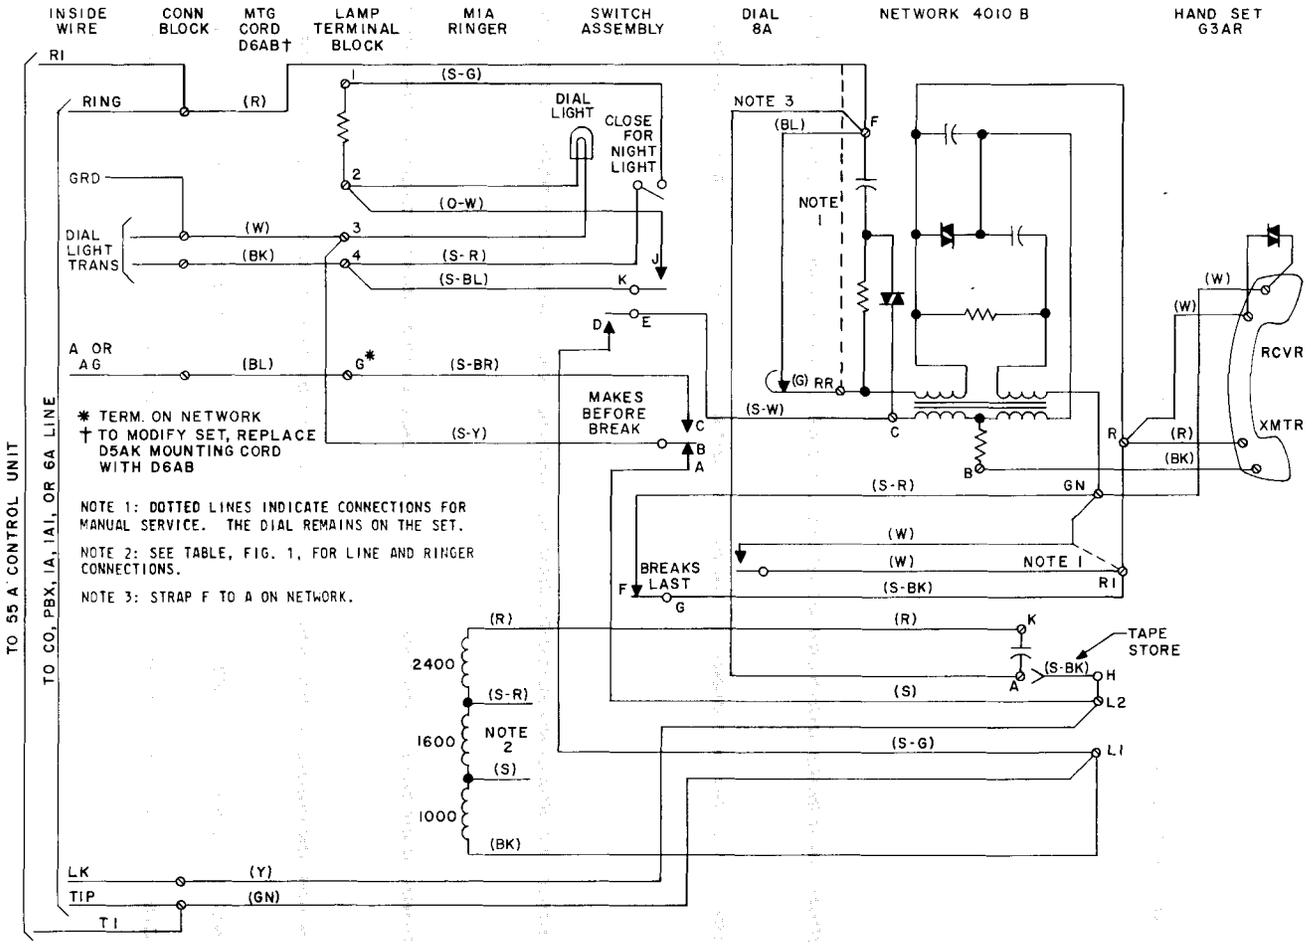


Fig. 3 - 702B Telephone Set
Used with 3A Speakerphone

TABLE C
MODIFICATIONS FOR USE WITH
3A SPEAKERPHONE

| | | | |
|---------------------|------|----|----------------|
| D6AB Mounting Cord | R | L2 | F |
| | BL | | G |
| | Y | G | L2 |
| Switchhook Assembly | S-Y | L2 | 3 |
| | S | A | L2 |
| | S-BR | C | G |
| H Terminal Network | S-BK | A | Tape and Store |
| Strap | | A | F |



To prevent false holding condition when handset is restored, switch contacts CB must break before DE breaks.

