



# IW SPM IP Fault Management

## Fault management strategy

### Alarm reporting system for SPM-based equipment

The alarm reporting system integrates event detection and alarm notification functions. An alarm becomes active when a reduced service, reliability, or test condition occurs in the network or network element. The alarm remains active until a system event or activity performed by operating company personnel clears the alarm condition. The alarm system includes audible notification and visual display through warning lights and the Maintenance and Administration Position (MAP) terminal.

- **Critical alarm**  
A critical alarm indicates a reduced service condition or complete loss of service. A critical alarm indicates that the system can no longer perform its design function. The alarm condition requires immediate correcting action so that the performance of the system can return to its design function.
- **Major alarm**  
A major alarm indicates lost redundancy. The next fault of the same type can cause a reduction or complete loss of service. There is no backup if another fault occurs on the active system. This alarm level can be generated when service decreases below an operating company defined threshold.
- **Minor alarm**  
A minor alarm indicates a small loss of redundancy. The next fault of the same type will not cause degradation of service.

Equipment alarms and alarm severity codes indicate the effect that a fault or event has on a single piece of equipment. There are three types of alarm severities:

For IW SPM IP-based equipment, the MAP terminal displays alarm codes in the banner and the subsystem status summary field (SSSF). The alarm banner displays alarm codes that indicate the effect of the

alarm event on the network or network element. The SSSF displays alarm codes that indicate equipment faults of system states.

### Log reports

A log report is a record of a message that your system generates whenever a significant event has occurred in the switch or one of its peripherals. Log reports include status and activity reports, as well as reports on hardware or software faults, test results, changes in state, and other events or conditions likely to affect the performance of the switch. Either a system or a manual action can generate a log report. The figure below, [Log report example for SPM630 log](#), gives an example of an information log.

**Figure 1 Log report example for SPM630 log**

```

SPM630 Feb 07 10:22:11 4700 INFO Device Protection
Location      SPM: 01  OC3 01
From:         Working
To:           Spare
  
```

Figure 2, [Log report example for SPM332 log](#) shows a REX failure log along with explanations for the various fields.

**Figure 2 Log report example for SPM332 log**

```

SPM332 JAN 24 01:57:54 2112 TBL SPM REX Aborted
SPM: 0          Type: IW
Reason: Stability check on CEM 0 failed
        SYSB in the past 12 hours
  
```

Field	Description
SPM REX Aborted	Indicates that the information to follow mentions why REX test on the SPM node was aborted
Node type	Indicates that the node type for this log is SPM
Node Number	SPM number (range is 0-85)
Type	Indicates the variant of the SPM (valid values are DMSCP, MG4K, IW, and DPT).
Reason	Provides the reason why the REX test was aborted (limited to three lines of text).

## **Tools and utilities**

Fault management for alarms and logs is performed through the Maintenance and Administration Position (MAP) terminal.

## Fault management indicators

The following table lists the fault management indicators generated by the IW SPM IP.

### IW SPM IP fault management indicators

Log name and number	Explanation
CLOCK500	Logs related to system synchronization state changes
IOAU112	The System REX Controller noted changes to the System REX Controller operation or schedule.
IWBM500	The C-side link, STS3cP carrier, the network state, or the address state for the IW bridge software goes out-of-service.
IWBM501	The C-side link, STS3cP carrier, the network state, or the address state for the IW bridge software returns to service.
IWBM600	The IW bridge receives an invalid terminal ID during an attempt to free a bridge.
IWBM601	The audit finds a problem and performs a corresponding action. For Example an audit action occurs when a bridge has incorrect connectivity or a pointer to a bridge's protected data is corrupt.
IWBM602	No bridge available - info.
IWBM603	Audit log - info.
IWBM700	Maintenance action log - info.
IWBM800	Number of available IW bridges exceeds the first threshold when attempting to retrieve and IW-bridge ID from the IW bridge manager. The first threshold is 70% of the available IW bridges in the IW-bridge manager exhausted or in use. Does not include offline carriers.
IWBM801	Number of available IW bridges falls to less than 65% of bridges in the pool in use. This log always occurs after IWBM800. Does not include offline carriers.
IWBM802	Number of available IW bridges exceeds second threshold when attempting to retrieve and IW-bridge ID from the IW bridge manager. The second threshold is 90% of the available IW bridges in the IW-bridge manager exhausted or in use. Does not include offline carriers.

## IW SPM IP fault management indicators

Log name and number	Explanation
IWBM803	Number of available IW bridges falls to less than 85% of bridges in the pool in use. This log always occurs after IWBM802. Does not include offline carriers.
IWBM900	Nortel design debug tool.
LINK300	<p>A DS-512 hostlink is detected as misconnected between the ENET and the SPM-CEM.</p> <p>Check to find out which links are misconnected.</p> <ul style="list-style-type: none"> <li>• BSY the links from the ENET map</li> <li>• Connect the links from the ENET to correspond correctly with the CEM. The port on the CEM must be exactly as datafilled in table MNLINK.</li> <li>• RTS the MANB links from the ENET map</li> </ul> <p><b>Note:</b> Refer to solution level logs to see other possible causes for the LINK300 log</p>
LINK500	Logs generated from the MS and ENET for the DS-512 links.
NODE300	Logs related to hardware faults in the RMs and CEM. Refer to log NODE303 below.
NODE302	Software Alarm
NODE303	<p>Logs to indicate Wrong Application Data on the CEM.</p> <p>Core Integrated Node Maintenance (INM) detected wrong application data for one of the following reasons:</p> <ul style="list-style-type: none"> <li>• CEM restarted with wrong application data due to manually initiated Reset/Loadmod/InsvLD.</li> <li>• CEM restarted with wrong application data due to system initiated Reset/Loadmod.</li> <li>• Manual/system initiated RTS (bringing CEM back into service - INSV/ISTB) was attempted on CEM with wrong application data.</li> </ul> <p><b>Note 1:</b> Refer to <a href="#">Log NODE303 format on page 10</a> for NODE303 format details.</p> <p><b>Note 2:</b> See log Link300 (above) to help identify the misconnected DS-512 Link.</p>

## IW SPM IP fault management indicators

Log name and number	Explanation
NODE326	Log NODE326 is generated when a hardware fault occurs in a unit of a node.
NODE500	Logs related to node state change and activity switching. Log NODE500 is generated whenever a state change happens in any of the units of a dual unit PM. NODE500 is an information log.
NODE600	System recovery action. Info log
NODE601	System status notification Info log.
SPM300	<p>Logs related to hardware faults in the RMs (clock hardware, RM hardware, or link hardware) which indicates a device fault has occurred. There are three severities of problem descriptions:</p> <ul style="list-style-type: none"> <li>• Info - information only log.</li> <li>• Non-Critical - A Non-Critical fault reported by the active CEM causes the affected RM to change to an ISTB state.</li> <li>• Critical - A Critical fault reported by the active CEM causes the RM to change to a SYSB state and spare, if it is active.</li> </ul> <p>Faults reported by the inactive CEM affect the RM state when that CEM becomes active, if they are not cleared prior to that CEM becoming active.</p> <p>The problem description field contains a text string indicating which problem occurred.</p> <p>The B-channel is busied or returned to service.</p> <p>Clear the fault using the appropriate procedure.</p> <p><b>Note:</b> See <a href="#">Log SPM300 format on page 11</a> and <a href="#">SPM300 log problem descriptions on page 12</a> for detailed explanations.</p>
SPM301	The clock oscillator tuning range has reached 70% or 90% of the maximum range.
SPM311	Software related to RM sparing.
SPM312	TBL trap.
SPM313	Module information memory (MIM) on an SPM.
SPM314	TBL IMC.
SPM330	The two CEMs have either come in to datasync or out of datasync.

## IW SPM IP fault management indicators

Log name and number	Explanation
SPM331	A device had a protection switch failure.
SPM332	<p>SPM REX aborted. Reports stability or screening failures for REX operation.</p> <p><b>Note:</b> See <a href="#">Log SPM332 Problem Descriptions</a> (below) for REX test failure explanations.</p>
SPM333	<p>SPM REX failed. Reports failures reasons for REX operation.</p> <p>Reasons for an SPM REX failure:</p> <ul style="list-style-type: none"> <li>• RESET step failed</li> <li>• OOS test step failed</li> <li>• RTS step failed CEM</li> <li>• CEM drops to SYSB or does not come to Insv state during post-RTS wait period</li> <li>• SWACT step failed (either rejected or failed from Local Agent)</li> </ul> <p><b>Note:</b> If the reason in SPM333 is RESET, OOS test, or RTS step, collect NODE500 and NODE600 logs. A SYSB alarm will be raised on the MAP and PM Alarm Banner will be highlighted.</p>
SPM335	<p>A device had a protection switch failure.</p> <p>Clear the PROTFAIL alarm using the appropriate procedure</p>
SPM340	Fail CM Warm Swact.
SPM341	An RM has entered into Holdover state.
SPM344	The SRM Loss of BITS Redundancy (LOR) alarm has been set.
SPM350	There is the potential for resource exhaustion of a particular resource type. The log also generates when the alarm is cleared.

## IW SPM IP fault management indicators

Log name and number	Explanation
SPM370	<p>An SPM370 log (Health Monitor Event log) is generated whenever a Health Monitor alarm is raised or a Health Monitor RMM action is taken.</p> <p>When the status is “Alarm Raised”, investigate the cause. The “Correlating logs with alarms” section of this document provides possible causes for the associated alarms.</p> <p>Refer to the SPMCP (SPM call processing) commands in the Security and Administration document, <i>NN10163-611</i> for additional information.</p> <p><b>Note:</b> When the status is “Info”, no action is required.</p>
SPM500	Logs related to RM state change and activity switching (sparing).
SPM501	The clock mode has changed from sync, freerun, holdover, or acquire to sync, freerun, holdover, or acquire.
SPM600	Logs generated when the MS changes synchronization modes and is unable to notify an in-service SPM of the change.
SPM630	A successful sparing event has occurred.
SPM632	SPM REX Info. A log generated to record the start time of REX operation.
SPM633	SPM REX Success. A successful REX operation has occurred.
	<p><b>Note:</b> Node 500 logs report state changes on the CEM during REX tests.</p>
SPM642	An RM has exited Holdover24 state.
SPM644	The SRM Loss of BITS Redundancy (LOR) alarm has been cleared.
SPM645	Link Protocol & Messaging Interface Controller (LPMIC) Event Report. This information log is generated on every CEM and transported to the core. The log is generated periodically and whenever the number of events crosses a threshold value.
SPM650	A successful in-service loading procedure has occurred.
SPM651	Logs generated when an in-service CEM/RM loading operation on a circuit pack fails.

## IW SPM IP fault management indicators

Log name and number	Explanation
SPM670	An SPM670 log is generated when a Health Monitor event clears.
SPM680	"Message Buffer Manager (MBM) buffer usage high" log message.
SPM681	"Message Buffer Manager (MBM) buffer pool low" log message.
SPM684	<p>The Erase Flash information log indicates when the:</p> <ul style="list-style-type: none"> <li>• Erase flash command is initiated,</li> <li>• Erase flash command is completed,</li> <li>• Erase flash command failed, and</li> <li>• Erase flash command is rejected.</li> </ul> <p>None (This is an information log)</p> <p>The log displays the CEM and SPM number on which the Erasefl command is executed in addition to the userid of the craft who initiated the command.</p>
SPM700	DDM audit fail.
SPM701	DDM audit succeeded.
SPM702	DDM dynamic update failed.
VOIP800	Cyclical Redundancy Check (CRC) alignment error.
VOIP801	Undersize packets
VOIP802	Oversize packets.
VOIP803	Fragments.
VOIP804	Jabber.
VOIP805	Drop events.
VOIP806	Broadcast packets.
VOIP807	Jitter.
VOIP808	Latency

## IW SPM IP fault management indicators

Log name and number	Explanation
VOIP809	Packets lost.
VOIP810	Decoder under run.

### Log NODE303 Format

Log NODE303 reports Wrong Application Data. This means the CEM in slot 7 of the SPM is getting application data for CEM1, and the CEM in slot 8 is getting application data for CEM 0. Node303 displays actions required in response to this.

**Note:** The CEM cannot Return to Service with Wrong Application Data.

### Log NODE303 format

```

NODE 303 **<mmdd hh:mm:ss> <ssdd> TBL Wrong
Application Data
Location: <NODE>
Trouble: CEM has Wrong Application Data
Action: Check and re-connect DS-512 Links correctly
Integrated Node Maintenance Detailed Information
Trouble Reason: DS-512 Link/Links may be
misconnected
Trouble Detail: CEM in Slot <slot_number(7 or 8)>
has Application Data of CEM <cem_number(0 or 1)>

```

### Log NODE303 format

Field	Description
TBL	Indicates the trouble condition with the node.
Wrong Application Data	Indicates that the information to follow is about Wrong Application Data on the node.
Location	Indicates the location of the peripheral event to which the event applies.
Trouble	Identifies the type of problem.
Action (User)	Indicates the suggested user action.

**Log NODE303 format**

Field	Description
Trouble Reason	Indicates the reason for the trouble condition.
Trouble Detail	Provides more information about the trouble condition.

**Log SPM300 Format**

Log SPM300 reports a device fault.

**Log SPM300 format**

```
SPM 300 ** <mmdd hh:mm:ss> <ssdd> TBL Device Fault Report
Location: <NODE> <DEVICE>
Status   : Alarm Raised
Problem Description: Critical
  7A: Check messaging: Inactive CEM to RM loopback test timeout.
Action   : Refer to NTPs for Alarm Clearing Procedures.
Cardlist :          No Cardlist Available.dlist Available.
```

**Log SPM300 format**

Field	Description
TBL	Indicates the trouble condition with the node.
Device Fault Report	Indicates that the information to follow is a device fault report on the indicated device.
Location	Indicates the location of the peripheral event and device to which the event applies.
Status	Indicates whether the alarm is raised or cleared
Problem Description	Indicates the type of fault (Info, Non-critical, Critical) along with the information on which CEM reported the fault and a text string indicating what fault occurred.
Action (User)	Indicates the suggested user action.
Cardlist	Indicates the cards to be replaced.

### Log SPM300 Problem Descriptions

The following table provides details for the problem descriptions in the SPM300 log.

#### SPM300 log problem descriptions

Failure reason	Explanation
Check messaging: Inactive CEM to RM loopback test timeout	<p>This log indicates that there is a problem communicated to the indicated RM from the inactive CEM. If the inactive CEM becomes active while this condition exists, the RM will go SYSB.</p> <p>If this log occurs:</p> <ol style="list-style-type: none"> <li>1) Collect sysbuf and /aer/display all from the inactive CEM dshell.</li> <li>2) Try to remlogin to the RM from the inactive CEM. If this fails, remlogin to the RM from the active CEM. Collect the footprint logs from the RM.</li> <li>3) BSY/RTS the RM.</li> <li>4) If the log reoccurs, BSY/RESETMOD/RTS the inactive CEM.</li> </ol>

### Log SPM332 Problem Descriptions

The following table provides details for the problem descriptions in the SPM332 log.

#### SPM332 log - REX test failure

Failure reason	Explanation
Node not in InSv/IsTb state	<p>Stability check on node failed.</p> <p>&lt;Node state&gt; state</p> <p>SPM REX aborted</p>
CEM not in InSv state, RM not in InSv/MANB/OFFL state	<p>Stability check on &lt;CPK type&gt; &lt;CPK no:&gt; failed.</p> <p>&lt;CPK state&gt; state</p> <p>SPM REX aborted</p>
CEM/RM having a non-state alarm	<p>Stability check on &lt;CPK type&gt; &lt;CPK no:&gt; failed.</p> <p>&lt;Alarmid&gt; alarm</p> <p>SPM REX aborted</p>

**SPM332 log - REX test failure**

Failure reason	Explanation
Protection group having an alarm	Stability check on <Prt grp type> <Prt grp id> failed. <Alarmid> alarm SPM REX aborted
Node having a non-state alarm	Stability check on node failed. <Alarmid> alarm SPM REX aborted
CM SWACT has occurred in the past 12 hours	CM SWACTed in the past 12 hours. Stability database may be stale. SPM REX aborted
CEMs do not have the same running load	CEM 0 and CEM 1 do not have the same load. SPM REX aborted
CEM/RM has been in ISTB/SYSB state in the past 12 hours	Stability check on <CPK type> <CPK no> failed. <CPK state> in the past 12 hours SPM REX aborted
CEM/RM had an alarm raised in the past 12 hours	Stability check on <CPK type> <CPK no> failed. <Alarm name> alarm in the past 12 hours SPM REX aborted
CEM/RM has been in Patched/Loaded/Provisioned within the stability period	Stability check on <CPK type> <CPK no> failed. <Event name> in the past <stability period> hours SPM REX aborted
Node had an alarm raised in the past 12 hours	Stability check on node failed. <Alarm id> alarm in the past 12 hours SPM REX aborted
Protection group had an alarm raised in the past 12 hours	Stability check on protection group failed. <Grp type> <Grp id> <Alarm id> alarm in the past 12 hours SPM REX aborted

**SPM332 log - REX test failure**

<b>Failure reason</b>	<b>Explanation</b>
Long duration maintenance activity in progress on RM	Long Maintenance activity on <RM type> <RM no>. SPM REX aborted
Long duration maintenance activity in progress on CEM	CEM <CEM no>. Long maintenance activity in progress. SPM REX aborted
REX test aborted by manual ABTK command from CEM MAP level	Rex test aborted manually. SPM REX aborted
REX test aborted by the system REX	REX test aborted by the system. SPM REX aborted

## Viewing alarms

### Viewing alarms on the SPM

#### At the MAP level

- 1 Post the SPM by typing

```
>MAPCI;MTC;PM;POST SPM <spm_no>
```

and pressing the Enter key.

where

**spm\_no**

is the number of the SPM (0 to 85)

*Example of a MAP screen:*

```

XAC      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.        .        NO AMA  Istb    1 DPT   2 RS     .        81C..    1 Maj  SBS D+
          *C*                *C*     *C*
SPM
0 Quit          PM          0          0          0          0          11       12
2 Post_        SPM          0          0          0          0          3         0
3 ListSet
4 ListRes     SPM    0  ISTb  Class: IW          BRG_Only
5 Trnsl
6
7 Sh1f0 SL A Stat  Sh1f0 SL A Stat  Sh1f1 SL A Stat  Sh1f1 SL A Stat
7 ATMConn    ----- 1 - ----  CEM 1  8 I ISTb  ----- 1 - ----  ----- 8 - ----
8            ----- 2 - ----  GEM 0  9 A ISTb  ----- 2 - ----  ----- 9 - ----
9            ----- 3 - ----  GEM 1 10 I ManB  ----- 3 - ----  ----- 10 - ----
10           ----- 4 - ----  ----- 11 - ----  ----- 4 - ----  ----- 11 - ----
11 Disp_     ----- 5 - ----  ----- 12 - ----  ----- 5 - ----  ----- 12 - ----
12 Next      ----- 6 - ----  ----- 13 - ----  ----- 6 - ----  ----- 13 - ----
13 Select_   CEM 0  7 A ISTb  ----- 14 - ----  ----- 7 - ----  ----- 14 - ----
14 QueryPM
15 ListAlm
16
17 SPERFORM
18 Upgrade_
   BHARSH
Time 13:12 >|

```

- 2 Display alarms on the RMs on the SPM by typing

```
>QUERYPM FLT
```

and pressing the Enter key.

- 3 Display alarms on the SPM by typing

```
>LISTALM
```

and pressing the Enter key.

## Clearing a CLKOOS alarm

### Clearing a CLKOOS alarm

#### At the MAP terminal

- 1 Access the PM level of the map screen by typing  
**>MAPCI ;MTC ;PM**  
 and pressing the Enter key.
- 2 Display all the inservice-trouble (ISTb) SPMs by typing  
**>DISP STATE ISTb SPM**  
 and pressing the enter key.
- 3 Post each ISTb SPM by typing  
**>POST SPM <spm\_no>**  
 and pressing the Enter key.

where

**spm\_no**

is the number of the SPM (0 to 85)

*Example of a MAP screen:*

```

XAC      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.        .        NO AMA  Istb    1 DPT   2  RS    .      81C..   1 Maj  SBS D+
          *C*          *C*    *C*          *C*          *C*          *C*          *C*
SPM
0 Quit          PM          0      0      0      0      11     12
2 Post_        SPM          0      0      0      0      3      0
3 ListSet
4 ListRes     SPM      0  ISTb  Class: IW          BRG_Only
5 Trnsl
6            Sh1f0 SL A Stat  Sh1f0 SL A Stat  Sh1f1 SL A Stat  Sh1f1 SL A Stat
7 ATMConn    ----- 1 - ----  GEM 1  8 I ISTb  ----- 1 - ----  ----- 8 - ----
8            ----- 2 - ----  GEM 0  9 A ISTb  ----- 2 - ----  ----- 9 - ----
9            ----- 3 - ----  GEM 1 10 I ManB  ----- 3 - ----  ----- 10 - ----
10           ----- 4 - ----  ----- 11 - ----  ----- 4 - ----  ----- 11 - ----
11 Disp_     ----- 5 - ----  ----- 12 - ----  ----- 5 - ----  ----- 12 - ----
12 Next      ----- 6 - ----  ----- 13 - ----  ----- 6 - ----  ----- 13 - ----
13 Select_   CEM 0  7 A ISTb  ----- 14 - ----  ----- 7 - ----  ----- 14 - ----
14 QueryPM
15 ListAlm
16
17 SPERFORM
18 Upgrade_
   BHARSH
Time 13:12 >|

```

- 4 Select the ISTb common equipment module (CEM) by typing

**>SELECT CEM <cem\_no>**

where

**cem\_no**

is the number of the ISTb CEM (0 or 1)

*Example of a MAP screen:*

```
SPM  11 CEM  0 Act  ISTb

Loc : Row F  FrPos 64 ShPos  6 ShId 0 Slot  7
Default Load: SPMLOAD
Clock:
Input Ref:           Source:           Current Mode:
```

- 5 List the alarms on the CEM by typing

**>LISTALM**

and pressing the Enter key.

*Example of a MAP screen:*

```
SPM  11 CEM  0 Act  ISTb

Loc : Row F  FrPos 64 ShPos  6 ShId 0 Slot  7
Default Load: SPMLOAD
Clock:
Input Ref:           Source:           Current Mode:
ListAlm
ListAlm: SPM 11  CEM 0
```

SEVERITY	ALARM	ACTION
Critical	None	
Major	CLKOOS	RPT
Minor	None	
No_Alarm	None	

- 6 Record the number of each SPM exhibiting the CLKOOS condition.

- 7 Access the MTC level of the MAP screen by typing

**>MAPCI;MTC**

and pressing the Enter key.

- 8 Check the alarm banner and determine whether there is an MS clock alarm.

If there is	Do
an MS clock alarm	<a href="#">step 9</a>
not an MS clock alarm	<a href="#">step 10</a>

- 9 Clear the MS clock alarm using the appropriate alarm clearing procedures. When you have completed the procedures, go to Step 13.

- 10 List the alarms on the CEM by typing

>**LISTALM**

and pressing the Enter key.

If the alarm list shows	Do
None	<a href="#">step 22</a>
CLKOOS	<a href="#">step 11</a>

- 11 Determine if sync fault condition is present on the downstream equipment driving the OC3 into the SPM.

If sync fault condition is	Do
present	<a href="#">step 12</a>
not present	<a href="#">step 14</a>

- 12 Clear sync fault condition on downstream equipment driving the OC3 into the SPM.

**Note:** Once a sync fault condition is corrected, the SPM clears the CLKOOS condition, but there will be a delay of between 20 and 40 minutes while the SPM evaluates the stability of the OC3 carrier frequency.

- 13 List the alarms on the CEM by typing

>**LISTALM**

and pressing the Enter key.

If the alarm list shows	Do
None	<a href="#">step 22</a>
CLKOOS	<a href="#">step 14</a>

- 14 Force the CEMs to switch activity by typing

>**PROT;FORCE;QUIT**

- and pressing the enter key.
- 15** Select the active (A) CEM by typing  
**>SELECT CEM <cem\_no>**  
 and pressing the Enter key.  
*where*  
     **cem\_no**  
     is the number of the active CEM (0 or 1)
- 16** List the alarms on the CEM by typing  
**>LISTALM**  
 and pressing the enter key.
- | <b>If the alarm list shows</b> | <b>Do</b>               |
|--------------------------------|-------------------------|
| None                           | <a href="#">step 17</a> |
| CLKOOS                         | <a href="#">step 20</a> |
- 17** Force the CEMs to switch activity by typing  
**>PROT;FORCE;QUIT**  
 and pressing the Enter key.
- 18** Select the active (A) CEM by typing  
**>SELECT CEM <cem\_no>**  
 and pressing the Enter key.  
*where*  
     **cem\_no**  
     is the number of the active CEM (0 or 1)
- 19** List the alarms on the CEM by typing  
**>LISTALM**  
 and pressing the Enter key.  
*Example of a MAP screen:*

```
SPM 11 CEM 0 Act ISTb
```

```
Loc : Row F FrPos 64 ShPos 6 ShId 0 Slot 7
```

```
Default Load: SPMLOAD
```

```
Clock:
```

```
Input Ref:           Source:           Current Mode:
```

```
ListAlm
```

```
ListAlm: SPM 11 CEM 0
```

```
SEVERITY      ALARM      ACTION
```

```
-----
Critical      None
Major         CLKOOS      RPT
Minor         None
No_Alarm      None
```

---

If the alarm list shows	Do
-------------------------	----

---

None	<a href="#">step 22</a>
------	-------------------------

CLKOOS	<a href="#">step 20</a>
--------	-------------------------

---

- 20** Return to the SPM level and list the alarms on the CEM by typing **>LISTALM** and pressing the Enter key.

If the alarm list shows	Do
None	<a href="#">step 22</a>
CLKOOS	<a href="#">step 21</a>

- 21** For further assistance, contact the personnel responsible for the next level of support.
- 22** You have completed this procedure. Return to the CI level of the MAP screen by typing **>QUIT ALL** and pressing the Enter key.

---

## Clearing an ISTB alarm

---

### Clearing an ISTB alarm

#### *At the MAP terminal*

- 1 Access the PM level of the MAP screen by typing  
**>MAPCI;MTC;PM**  
and pressing the Enter key.

*Example of a MAP screen:*

	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	1	1	1	3	2	12

- 2 Show the state of all PMs by typing  
**>STATUS**  
and pressing the Enter key.
- 3 Display the SPMs that are in-service trouble by typing  
**>DISP STATE ISTB SPM**  
and pressing the Enter key.
- 4 Record the number of the SPMs.
- 5 Post each in-service trouble SPM by typing  
**>POST SPM <spm\_no>**  
and pressing the Enter key.  
*where*  
**spm\_no**  
is the number of the SPM (0 to 85)
- 6 Determine which of the modules is in-service trouble (ISTb) and select the modules by typing  
**>SELECT <module\_type> <module\_no>**  
and pressing the Enter key.  
*where*  
**module\_type**  
is the type of module (CEM, OC3, DSP, VSP, or DLC)  
**module\_no**  
is the number of the module (0 to 27)

- 7 Show the actual software load by typing

**>QUERYMOD**

and pressing the Enter key.

*Example of a MAP screen:*

```
SPM 3      OC3 1      Act  ISTb

Loc : Row E  FrPos  8 ShPos 24 ShId 0 Slot 10  Prot Grp : 1
Default Load: SPMLoad                               Prot Role: Working
QueryMod
SPM 12 OC3 0 Query: Request has been submitted.
OC3  0 ISTb Act   Loc: Row D  FrPos 64 ShPos  6 ShId 0 Slot  9
Default Load: SPMLoad                               Actual Load: SPMLoad
```

- 8 Access the PROT level by typing

**>PROT**

and pressing the Enter key.

- 9 Perform a manual protection switch by typing

**>MANUAL <active\_cpk> <spare\_cpk>**

and pressing the Enter key.

where

**active\_cpk**

is the number of the active circuit pack

**spare\_cpk**

is the number of the spare circuit pack

**Note:** For CEMs, the active\_cpk and spare\_cpk parameters are not required.

- 10

If the circuit pack is	Do
a CEM	<a href="#">step 11</a>
any other circuit pack	<a href="#">step 12</a>

- 11 Load the CEM with its software load by typing

**>LOADMOD INSVLD**

and pressing the Enter key.

Go to [step 13](#).

- 12 Download matching software for the circuit pack by typing

**>LOADMOD MATE <active\_cpk>**

and pressing the Enter key.

where

**active\_cpk**

is the number of the previously inactive circuit pack

- 13** Protection switch back to the original circuit pack by typing

**>MANUAL <active\_cpk> <inactive\_cpk>**

and pressing the Enter key.

where

**active\_cpk**

is the number of the previously inactive circuit pack

**inactive\_cpk**

is the number of the previously active circuit pack

**Note:** For CEMs, the active\_cpk and spare\_cpk parameters are not required.

- 14** Return to the posted circuit pack by typing

**>QUIT**

and pressing the Enter key.

- 15** List the alarms on the module by typing

**>LISTALM**

and pressing the Enter key.

- 16** Determine whether the alarm has cleared.

- 17** Perform an in-service test on the module by typing

**>TST**

and pressing the Enter key.

*Example of a MAP screen:*

```
SPM 3      OC3 1      Act  ISTb

Loc : Row E  FrPos  8 ShPos 24 ShId 0 Slot 10  Prot Grp : 1
Default Load: SPMLoad                      Prot Role: Spare
Clock:Input Ref: Internal      Source: C Side 0  Current Mode:
Acquire
Tst
SPM 3 CEM 0 Test : Request has been submitted.
SPM 3 CEM 0 Test : Test passed.
```

- 18** Determine the test condition of the module.

- 19** Access the PROT level by typing

**>PROT**

- and pressing the Enter key.
- 20** Perform a manual protection switch by typing  
>**MANUAL** <**active\_cpk**> <**spare\_cpk**>  
and pressing the Enter key.  
where  
**active\_cpk**  
is the number of the active circuit pack  
**spare\_cpk**  
is the number of the spare circuit pack  
**Note:** For CEMs, the active\_cpk and spare\_cpk parameters are not required.
- 21** Return to the posted circuit pack by typing  
>**QUIT**  
and pressing the Enter key.
- 22** Manual busy the module by typing  
>**BSY**  
and pressing the Enter key.
- 23** Perform an out-of-service test on the module by typing  
>**TST**  
and pressing the Enter key.
- 24** Determine the test condition of the module.
- 25** Return the module to service by typing  
>**RTS**  
and pressing the Enter key.
- 26** Determine the state of the module.
- 27** Replace the module, as appropriate. When you have completed the procedure, return to this point.
- 28** List the alarms on the module by typing  
>**LISTALM**  
and pressing the Enter key.
- 29** Determine whether the alarm has cleared.
- 30** For further assistance, contact the personnel responsible for the next level of support.

- 31** You have completed this procedure. Return to the CI level of the MAP screen by typing  
**>QUIT ALL**  
and pressing the Enter key.

---

## Clearing a MANB alarm

---

### Clearing a MANB alarm

#### *At the MAP terminal*

- 1 Access the PM level of the MAP screen by typing  
**>MAPCI ;MTC ;PM**  
and pressing the Enter key.

*Example of a MAP screen:*

	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	1	1	1	3	2	12

- 2 Show the state of all PMs by typing  
**>STATUS**  
and pressing the Enter key.
- 3 Display the SPM that are manual busy by typing  
**>DISP STATE MANB SPM**  
and pressing the Enter key.
- 4 Record the number of the SPMs
- 5 Post each manual busy SPM by typing  
**>POST SPM <spm\_no>**  
and pressing the Enter key.

*where*

**spm\_no**

is the number of the SPM (0 to 85)

*Example of a MAP screen:*

```

XAC      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.        .        NO AMA  Istb    1 DPT  2  RS   .      81C..  1 Maj  SBS D+
          *C*          *C*    *C*          *C*          *C*          *C*
SPM
0 Quit          PM          0      0      0      0      11     12
2 Post_        SPM          0      0      0      0      3      0
3 ListSet
4 ListRes      SPM    0  ISTb  Class: IW          BRG_Only
5 Trns1
6
7 ATMConn      Sh1f0 SL A Stat  Sh1f0 SL A Stat  Sh1f1 SL A Stat  Sh1f1 SL A Stat
----- 1 - ----  CEM 1  8 I ISTb  ----- 1 - ----  ----- 8 - ----
8           ----- 2 - ----  GEM 0  9 A ISTb  ----- 2 - ----  ----- 9 - ----
9           ----- 3 - ----  GEM 1 10 I ManB  ----- 3 - ----  ----- 10 - ----
10          ----- 4 - ----  ----- 11 - ----  ----- 4 - ----  ----- 11 - ----
11 Disp_       ----- 5 - ----  ----- 12 - ----  ----- 5 - ----  ----- 12 - ----
12 Next        ----- 6 - ----  ----- 13 - ----  ----- 6 - ----  ----- 13 - ----
13 Select_     CEM 0  7 A ISTb  ----- 14 - ----  ----- 7 - ----  ----- 14 - ----
14 QueryPM
15 ListAlm
16
17 SPERFORM
18 Upgrade_
   BHARSH
Time 13:12 >|

```

- 6 Determine which of the modules is manual busy (ManB) and select the modules by typing

```
>SELECT <module_type> <module_no>
```

and pressing the Enter key.

where

**module\_type**

is the type of module (CEM, OC3, DSP, VSP, or DLC).

**module\_no**

is the number of the module (0 to 27).

*Example of a MAP screen:*

```

SPM 3      OC3 1 Act mANb

Loc : Row E FrPos  8 ShPos 24 ShId 0 Slot 10  Prot Grp : 1
Default Load: SPMLOAD                          Prot Role: Spare

```

- 7 If the status of the module is ManB, determine why the module was manual busied. Continue with Step 8 as soon as possible.

- 8 Return the module to service by typing

```
>RTS
```

and pressing the Enter key.

- 9 Determine the state of the module.

If the module is	Do
InSv	Step <a href="#">16</a>
SysB or IstB	Step <a href="#">10</a>
any other state	Step <a href="#">12</a>

- 10 Perform the alarm clearing procedures for SysB or IstB, as appropriate.

- 11 Determine the state of the module.

If the module is	Do
InSv	Step <a href="#">16</a>
any other state	Step <a href="#">12</a>

- 12 Replace the module as appropriate. When you have completed the card replacement procedure, return to this point.

- 13 List the alarms on the module by typing

**>LISTALM**

and pressing the Enter key.

- 14 Determine whether the alarm has cleared.

If the alarm list indicates	Do
MANB	Step <a href="#">15</a>
None	Step <a href="#">16</a>

- 15 For further assistance, contact the personnel responsible for the next level of support.

- 16 You have completed this procedure. Return to the CI level of the MAP screen by typing

**>QUIT ALL**

and pressing the Enter key.

---

## Clearing a MANBNA alarm

---

### Clearing a MANBNA alarm

#### *At the MAP terminal*

- 1 Access the PM level of the MAP screen by typing

**>MAPCI ;MTC ;PM**

and pressing the Enter key.

*Example of a MAP screen:*

	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	1	1	1	3	2	12

- 2 Display all the system busy SPMs by typing  
**>DISP STATE MANB SPM**  
and pressing the Enter key.
- 3 Record the number of the SPMs.
- 4 Post each manual busy not available SPM by typing  
**>POST SPM <spm\_no>**  
and pressing the Enter key.

*where*

**spm\_no**

is the number of the SPM (0 to 85)

*Example of a MAP screen:*

```

XAC      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.        .        NO AMA   Istb    1 DPT   2  RS    .      81C..   1 Maj   SBS D+
          *C*          *C*          *C*          *C*          *C*          *C*
SPM
0 Quit          PM          0          0          0          0          11      12
2 Post_        SPM          0          0          0          0          3        0
3 ListSet
4 ListRes      SPM    0  ISTb  Class: IW          BRG_Only
5 Trnsl
6
7 ATMConn      Sh1f0 SL A Stat  Sh1f0 SL A Stat  Sh1f1 SL A Stat  Sh1f1 SL A Stat
8 ----- 1 - ----  CEM 1  8 I ISTb  ----- 1 - ----  ----- 8 - ----
9 ----- 2 - ----  GEM 0  9 A ISTb  ----- 2 - ----  ----- 9 - ----
10 ----- 3 - ----  GEM 1 10 I ManB ----- 3 - ----  ----- 10 - ----
11 ----- 4 - ----  ----- 11 - ----  ----- 4 - ----  ----- 11 - ----
12 Disp_       ----- 5 - ----  ----- 12 - ----  ----- 5 - ----  ----- 12 - ----
13 Next        ----- 6 - ----  ----- 13 - ----  ----- 6 - ----  ----- 13 - ----
14 Select_     CEM 0  7 A ISTb  ----- 14 - ----  ----- 7 - ----  ----- 14 - ----
15 QueryPM
16 ListAlm
17 SPERFORM
18 Upgrade_
   BHARSH
Time 13:12 >|
    
```

5 List the status of the ENET links by typing

>**TRNSL**

and pressing the Enter key.

*Example of a MAP screen:*

```

SPM    11 CEM    0 Act    SysB (NA)

Loc : Row F  FrPos 64 ShPos  6 ShId 0 Slot  7
Default Load: SPMLOAD
Clock:
Input Ref:           Source:           Current Mode:
Trnsl
Link 1: ENET 0  0  30  0; Status: OK
Link 2: ENET 1  0  30  1; Status: NA
Link 3: ENET 0  0  30  2; Status: OK
Link 4: ENET 1  0  30  3; Status: OK
    
```

6 Determine whether the ENET links are in service.

<b>If the status of the ENET links is</b>	<b>Do</b>
OK	Step <a href="#">9b</a>
NA or UR	Step <a href="#">7</a>

- 7 If the status of the ENET links is NA (not available), Determine whether they were manual busied and why. Return the ENET links to service as soon as possible. When you have completed the procedure, return to this point.

**Note:** Contact your next level of support if you are not familiar with the procedures required to restore ENET links to service.

- 8 List the alarms on the SPM by typing

**>LISTALM**

and pressing the Enter key.

If the alarm list shows	Do
None	Step <a href="#">10</a>
MANBNA	Step <a href="#">9</a>

- 9 Perform the following substeps to record ENET information:

- a List the status of the ENET links by typing

**>TRNSL**

and pressing the Enter key.

*Example of a MAP screen:*

```
SPM  11 CEM  0 Act   SysB (NA)

Loc : Row F  FrPos 64 ShPos  6 ShId 0 Slot  7
Default Load: SPMLOAD
Clock:
Input Ref:           Source:           Current Mode:
Trnsl
Link 1: ENET 0  0  30  0; Status: OK
Link 2: ENET 1  0  30  1; Status: NA
Link 3: ENET 0  0  30  2; Status: OK
Link 4: ENET 1  0  30  3; Status: OK
```

- b Record the ENET shelf number (30 in the example above)

- 10 Do the following substeps to determine the MS card numbers:

- a At the CI level of MAP screen, locate the MS card that the ENET is connected to by typing

**>TABLE ENINV**

and pressing the Enter key.

- b** Create a heading for the tuple by typing  
**>HEADING**  
 and pressing the Enter key.
- c** Position on the tuple for the ENET shelf by typing  
**>POS <enet\_shelf\_no>**  
 and pressing the Enter key.  
*where*

**enet\_shelf\_no**  
 is the number of the ENET shelf  
*Example of a MAP screen:*

```

CI:
>table eninv
MACHINES NOT IN SYNC - DMOS NOT ALLOWED
JOURNAL FILE UNAVAILABLE - DMOS NOT ALLOWED
TABLE: ENINV
>heading
ENKEY ENCLASS FRTYPE FRNO      FRPEC      SHPEC MSCARD0 MSLINK0 MSPORT0 FLOOR0
ROW0 FRPOS0 SHELF0                                LOAD0 MSCARD1 MSLINK1 MSPORT1
FLOOR1 ROW1 FRPOS1 SHELF1                                LOAD1
-----
>pos 0
  0      PRI      ENC      0 NT9X05AB NT9X0801          6          0          0          1
  F      2      39                                ENX08AX      10          0          0
  1      F      1      39                                ENX08AX

```

- d** Record the MS card numbers under MSCARD0 and MSCARD1  
 (6 and 10 in the example above).
- 11** Locate the MS cards by typing  
**>MAPCI;MTC;MS;SHELF 0;CARD <ms\_card\_no>**  
 and pressing the Enter key.

*where*

**ms\_card\_no**  
 is the number of the MS card

*Example of a MAP screen:*

```

Message Switch   Clock   Shelf  0      Inter-MS Link 0 1
MS 0             .       Master      F                R R
MS 1             S       Slave       C                C C

Shelf 0          1 1 1 1 1 1 1 1 1 1 2 2 2 2 2 2
Card 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
Chain           < > < > < > < > | | |
MS 0           . . . . . F . . . . . F . . . . . - . . . . . F .
MS 1           C C C C C C C C C C C C C C C C C C C C C C C C C C C C

Card 06 Protocol Port  0____3  4____7  8____11  12____15
MS 0           .  DS512   64  . . . . . P P . . . . .
MS 1           C  DS512   64  C P P P P P P P P P P P P P P P P P P P
    
```

**12** Do the following substeps to check the status of both ports (0 and 1) on both MS cards (MSCARD0 and MSCARD1).

- a** Determine the state of each MS card port that connects to the SPM with the SYSBNA alarm, by typing

>**TRNSL** <ms\_card\_port>

and pressing the Enter key.

where

**ms\_card\_port**

is the number of the MS card port (0 or 1)

*Example of a MAP screen:*

```

PORT 20=SPM 10 (OK ,P:NA SYST ACC NP MSRR ^PSRR)
PORT 21=SPM 10 (OK ,P:NA SYST ACC NP MSRR ^PSRR)
PORT 22=SPM 11 (OK :UR SYST ACC NP MSRR PSRR)
PORT 23=SPM 11 (OK :UR SYST ACC NP MSRR PSRR)
PORT 24=SPM 12 (OK :AV SYST ACC NCP MSRR PSRR)
    
```

- b** Repeat Step 12a. for the second MS port.
- c** Repeat Step 11 for the other MS card and repeat Steps 12a. and 12b. to check the MS ports on that card. INSERT TABLE

If the status of the MS ports shows	Do
OK for all four ports	Step <a href="#">15</a>
NA or UR for any port	Step <a href="#">13</a>

- 13** Return the MS ports to service. When you have completed the procedure, return to this point.

**Note:** Contact your next level of support if you are not familiar with the procedures required to restore MS ports to service.

- 14** List the alarms on the SPM by typing

>**LISTALM**

and pressing the Enter key.

If the alarm list shows	Do
None	Step <a href="#">16</a>
SYSBNA	Step <a href="#">15</a>

- 15** For further assistance, contact the personnel responsible for the next level of support.

- 16** You have completed this procedure. Return to the CI level of the MAP screen by typing

>**QUIT ALL**

and pressing the Enter key.

---

## Clearing a NOSPARE alarm

---

### Clearing a NOSPARE alarm

#### *At the MAP terminal*

- 1 Access the PM level of the MAP screen by typing

**>MAPCI ; MTC ; PM**

and pressing the Enter key.

*Example of a MAP screen:*

	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	1	1	1	3	2	12

- 2 Show the state of all PMs by typing

**>STATUS**

and pressing the Enter key.

- 3 Post all of the SPMs by typing

**>POST SPM all**

and pressing the Enter key.

- 4 List the alarms on each SPM by typing

**>LISTALM**

and pressing the Enter key.

*Example of a MAP screen:*

```

XAC      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.        .        NO AMA  Istb    1 DPT  2  RS   .      81C..  1 Maj  SBS D+
          *C*          *C*          *C*          *C*          *C*          *C*
SPM
0 Quit          PM          0          0          0          0          11          12
2 Post_        SPM          0          0          0          0          3          0
3 ListSet
4 ListRes      SPM    0  ISTb  Class: IW          BRG_Only
5 Trns1
6
7 ATMConn      Sh1f0 SL A Stat  Sh1f0 SL A Stat  Sh1f1 SL A Stat  Sh1f1 SL A Stat
8 ----- 1 - ----  CEM 1  8 I ISTb  ----- 1 - ----  ----- 8 - ----
9 ----- 2 - ----  GEM 0  9 A ISTb  ----- 2 - ----  ----- 9 - ----
10 ----- 3 - ----  GEM 1 10 I ManB ----- 3 - ----  ----- 10 - ----
11 ----- 4 - ----  ----- 11 - ----  ----- 4 - ----  ----- 11 - ----
12 Disp_       ----- 5 - ----  ----- 12 - ----  ----- 5 - ----  ----- 12 - ----
13 Next        ----- 6 - ----  ----- 13 - ----  ----- 6 - ----  ----- 13 - ----
14 Select_     CEM 0  7 A ISTb  ----- 14 - ----  ----- 7 - ----  ----- 14 - ----
15 QueryPM
16 ListAlm
17 SPERFORM
18 Upgrade_
   BHARSH
Time 13:12 >|

```

- 5 Record the number of each SPM with a NOSPARE alarm.
- 6 Determine which of the modules are not in service (InSv, CBsy, or IsTb) and select the modules by typing

```
>SELECT <module_type> <module_number>
```

and pressing the Enter key.

where

**module\_type**

is the type of module (OC3, DSP, VSP, or DLC).

**module\_no**

is the number of the module (0 to 27)

- 7 Locate the NOSPARE alarms on each module by typing

```
>PROT;LISTALM
```

and pressing the Enter key.

- 8 Determine the state of the module from the LISTALM display.

*Example of a MAP screen:*

```

SPM 16 InSv
Prot Grp: VSP_GRP 1 Mode: Non-revertive Schema: m_for_n
Sh0 U R A Stat Sh0 U R A Stat Sh1 U R A Stat Sh1 U R A Stat
 1 -- - - ---- 8 -- - - ---- 1 0 W A ManB 8 -- - - ----
 2 -- - - ---- 9 -- - - ---- 2 1 W A ManB 9 -- - - ----
 3 -- - - ---- 10 -- - - ---- 3 -- - - ---- 10 -- - - ----
 4 -- - - ---- 11 -- - - ---- 4 -- - - ---- 11 -- - - ----
 5 -- - - ---- 12 -- - - ---- 5 -- - - ---- 12 -- - - ----
 6 -- - - ---- 13 -- - - ---- 6 -- - - ---- 13 -- - - ----
 7 -- - - ---- 14 -- - - ---- 7 -- - - ---- 14 -- - - ----

```

ListAlm

ListAlm: VSP\_GRP 1

```

SEVERITY    ALARM    ACTION
-----
Critical    None
Major       NOSPARE    RPT
Minor       None
No_Alarm    None

```

If the module is	Do
OffL	Step <a href="#">9</a>
ManB	Step <a href="#">10</a>
in any other state	Step <a href="#">13</a>

- 9 Return to the module level and set the module to manual busy by typing  
**>QUIT;BSY;RTS**  
and pressing the Enter key. Go to Step 11.
- 10 Return to the module level and return the module to service by typing  
**>QUIT;RTS**  
and pressing the Enter key.
- 11 List the alarms on the module at the protection level by typing  
**>PROT;LISTALM**  
and pressing the Enter key.

*Example of a MAP screen:*

```
ListAlm
```

```
ListAlm: VSP_GRP 1
```

```
SEVERITY    ALARM      ACTION
-----
Critical    None
Major       None
Minor       None
No_Alarm    None
```

- 12 Determine whether the NOSPARE alarm has cleared.

If the alarm list indicates	Do
NOSPARE	Step <a href="#">13</a>
None	Step <a href="#">21</a>

- 13 Determine the state of the module.

If the module is	Do
SysB	Step <a href="#">14</a>
in any other state	Step <a href="#">20</a>

- 14 Perform an in-service test on the module by typing

```
>TST
```

and pressing the Enter key.

*Example of a MAP screen:*

```
SPM 3    OC3 1    Act  ISTb
```

```
Loc : Row E  FrPos  8 ShPos 24 ShId 0 Slot 10  Prot Grp : 1
Default Load: SPMLoad          Prot Role: Spare
Clock:Input Ref: Internal      Source: C Side 0  Current Mode:
Acquire
```

```
Tst
```

```
SPM 3 CEM 0 Test : Request has been submitted.
```

```
SPM 3 CEM 0 Test : Test passed.
```

- 15 Determine the test condition of the module. I

If the test results show	Do
Test passed.	Step <a href="#">16</a>
Test failed.	Step <a href="#">19</a>

- 16** Return the module to service by typing  
**>RTS**  
and pressing the Enter key.
- 17** List the alarms on the module by typing  
**>LISTALM**  
and pressing the Enter key.
- 18** Determine whether the NOSPARE alarm has cleared.

<b>If the alarm list indicates</b>	<b>Do</b>
NOSPARE	Step <a href="#">20</a>
None	Step <a href="#">21</a>

- 19** Replace the module, as appropriate. When you have completed the procedure, return to this point.
- 20** For further assistance, contact the personnel responsible for the next level of support.
- 21** You have completed this procedure. Return to the CI level of the MAP screen by typing  
**>QUIT ALL**  
and pressing the Enter key.

---

## Clearing a PROTFAIL alarm

---

### Clearing a PROTFAIL alarm

#### *At the MAP terminal*

- 1 Access the PM level of the MAP screen by typing

**>MAPCI ;MTC ;PM**

and pressing the Enter key.

*Example of a MAP screen:*

	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	1	1	1	3	2	12

- 2 Show the state of all PMs by typing

**>STATUS**

and pressing the Enter key.

- 3 Post the all of the SPMs by typing

**>POST SPM all**

and pressing the Enter key.

*Example of a MAP screen:*

```

XAC      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.        .        NO AMA  Istb    1 DPT  2  RS   .      81C..  1 Maj  SBS D+
          *C*          *C*    *C*          *C*          *C*          *C*
SPM
0 Quit          PM          0      0      0      0      11     12
2 Post_        SPM          0      0      0      0      3      0
3 ListSet
4 ListRes      SPM    0  ISTb  Class: IW      BRG_Only
5 Trns1
6
7 ATMConn      Sh1f0 SL A Stat  Sh1f0 SL A Stat  Sh1f1 SL A Stat  Sh1f1 SL A Stat
----- 1 - ----  CEM 1  8 I ISTb  ----- 1 - ----  ----- 8 - ----
8           ----- 2 - ----  GEM 0  9 A ISTb  ----- 2 - ----  ----- 9 - ----
9           ----- 3 - ----  GEM 1 10 I ManB ----- 3 - ----  ----- 10 - ----
10          ----- 4 - ----  ----- 11 - ----  ----- 4 - ----  ----- 11 - ----
11 Disp_       ----- 5 - ----  ----- 12 - ----  ----- 5 - ----  ----- 12 - ----
12 Next        ----- 6 - ----  ----- 13 - ----  ----- 6 - ----  ----- 13 - ----
13 Select_     CEM 0  7 A ISTb  ----- 14 - ----  ----- 7 - ----  ----- 14 - ----
14 QueryPM
15 ListAlm
16
17 SPERFORM
18 Upgrade_
   BHARSH
Time 13:12 >|

```

- 4 Record the number of each SPM with a PROTFAIL alarm.
- 5 Determine which of the modules are not in service (InSv, CBsy, or ISTb) and select the modules by typing

**>SELECT <module\_type> <module\_no>**

and pressing the Enter key.

where

**module\_type**

is the type of module (OC3, DSP, VSP, or DLC)

**module\_no**

is the number of the module (0 to 27)

*Example of a MAP screen:*

```

SPM 3      OC3 1      InAct  OffL

Loc : Row E  FrPos  8  ShPos 24  ShId 0  Slot 10  Prot Grp : 1
Default Load: SPMLoad                               Prot Role: Spare

```

- 6 Locate the PROTFAIL alarms on each module by typing

**>LISTALM**

and pressing the Enter key.

*Example of a MAP screen:*

```

ListAlm
ListAlm: SPM 11   OC3

SEVERITY      ALARM      ACTION
-----
Critical      None
Major         PROTFAIL    RPT
Minor         None
No_Alarm      None

```

- 7 Determine the state of the module from the SELECT display.

If the module is	Do
SysB	<a href="#">Procedure 8</a>
in any other state	<a href="#">Procedure 11</a>

- 8 Perform an in-service test on the module by typing

**>TST**

and pressing the Enter key.

*Example of a MAP screen:*

```

SPM 11   OC3 1   Act  ISTb

Loc : Row E  FrPos 8 ShPos 24 ShId 0 Slot 10  Prot Grp : 1
Default Load: SPMLOAD                               Prot Role: Spare
Clock:Input Ref: Internal      Source: C Side 0  Current Mode:
Acquire
Tst
SPM 3 CEM 0 Test : Request has been submitted.
SPM 3 CEM 0 Test : Test passed.

```

- 9 Determine the test condition of the module.

If the test results show	Do
Test passed.	<a href="#">Procedure 10</a>
Test failed.	<a href="#">Procedure 12</a>

- 10 Return the module to service by typing

**>RTS**

and pressing the Enter key.

- 11 Determine the state of the module.

If the module is	Do
InSv	<a href="#">Procedure 13</a>
in any other state	<a href="#">Procedure 17</a>

- 12 Replace the module identified in [Procedure 5](#). When you complete the card replacement procedure, go to [Procedure 13](#) of this procedure.

- 13 Access the protection level of the MAP screen by typing  
**>PROT**  
 and pressing the Enter key.

- 14 Do a manual protection switch with a module in the same protection group by typing

**>MANUAL <from\_unit\_no> <to\_unit\_no>**

and pressing the Enter key.

*where*

**from\_unit\_no**

is the number (0 to 27) of the module with the alarm.

**to\_unit\_no**

is the number (0 to 27) of the inactive module in the same protection group

*Example of a MAP screen:*

```
SPM 0 DSP 1 Manual: Request has been submitted.
SPM 0 DSP 0 Manual: Command completed.
```

- 15 List the alarms on the module by typing

**>LISTALM**

and pressing the Enter key.

- 16 Determine whether the alarm has cleared.

If the alarm list indicates	Do
PROTFAIL	<a href="#">Procedure 17</a>
None	<a href="#">Procedure 18</a>

- 17 For further assistance, contact the personnel responsible for the next level of support.

- 18** You have completed this procedure. Return to the CI level of the MAP screen by typing  
**>QUIT ALL**  
and pressing the Enter key.

---

## Clearing a SYSB alarm

---

### Clearing a SYSB alarm

#### *At the MAP terminal*

- 1 Access the PM level of the MAP screen by typing  
**>MAPCI ; MTC ; PM**  
and pressing the Enter key.

*Example of a MAP screen:*

	SysB	ManB	OffL	CBSy	ISTb	InSv
PM	1	1	1	3	2	12

- 2 Show the state of all PMs by typing  
**>STATUS**  
and pressing the Enter key.
- 3 Display the SPMs that are system busy by typing  
**>DISP STATE SYSB SPM**  
and pressing the Enter key.
- 4 Record the number of the SPMs.
- 5 Post each system busy SPM by typing  
**>POST SPM <spm\_no>**  
and pressing the Enter key.

*where*

**spm\_no**

is the number of the SPM (0 to 85)

*Example of a MAP screen:*

```

XAC      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.        .        NO AMA  Istb    1 DPT  2  RS   .      81C..  1 Maj  SBS D+
          *C*          *C*          *C*          *C*          *C*          *C*
SPM
0 Quit          PM          0          0          0          0          11          12
2 Post_        SPM          0          0          0          0          3          0
3 ListSet
4 ListRes      SPM    0  ISTb  Class: IW          BRG_Only
5 Trns1
6
7 ATMConn      Sh1f0 SL A Stat  Sh1f0 SL A Stat  Sh1f1 SL A Stat  Sh1f1 SL A Stat
8 ----- 1 - ----  CEM 1  8 I ISTb  ----- 1 - ----  ----- 8 - ----
9 ----- 2 - ----  GEM 0  9 A ISTb  ----- 2 - ----  ----- 9 - ----
10 ----- 3 - ----  GEM 1 10 I ManB ----- 3 - ----  ----- 10 - ----
11 ----- 4 - ----  ----- 11 - ----  ----- 4 - ----  ----- 11 - ----
12 Disp_       ----- 5 - ----  ----- 12 - ----  ----- 5 - ----  ----- 12 - ----
13 Next        ----- 6 - ----  ----- 13 - ----  ----- 6 - ----  ----- 13 - ----
14 Select_     CEM 0  7 A ISTb  ----- 14 - ----  ----- 7 - ----  ----- 14 - ----
15 QueryPM
16 ListAlm
17 SPERFORM
18 Upgrade_
   BHARSH
Time 13:12 >|

```

- 6 Determine which of the modules is system-busy and select the modules by typing

```
>SELECT <module_type> <module_no>
```

and pressing the Enter key.

where

**module\_type**

is the type of module (CEM, OC3, DSP, VSP, or DLC).

**module\_no**

is the number of the module (0 to 27)

*Example of a MAP screen:*

```

SPM 3      OC3 1      InAct  OffL

Loc : Row E  FrPos  8  ShPos 24  ShId 0  Slot 10  Prot Grp : 1
Default Load: SPMLOAD                               Prot Role: Spare

```

- 7 Test the module by typing

```
>TST
```

and pressing the Enter key.

- 8 Determine the test condition of the module.

If the module test is	Do
OK	Step <a href="#">9</a>
not OK	Step <a href="#">11</a>

- 9 Return the module to service by typing

**>RTS**

and pressing the Enter key.

- 10 Determine the state of the module.

If the module is	Do
InSv	Step <a href="#">15</a>
any other state	Step <a href="#">14</a>

- 11 Replace the module identified in Step [6](#). For detailed instructions, see the SPM section of the *Card Replacement Procedures*. When you complete the card replacement procedure, go to Step [12](#) of this procedure.

- 12 List the alarms on the module by typing

**>LISTALM**

and pressing the Enter key.

- 13 Determine whether the alarm has cleared.

If the alarm list indicates	Do
SYSB	Step <a href="#">14</a>
None	Step <a href="#">15</a>

- 14 For further assistance, contact the personnel responsible for the next level of support.

- 15 You have completed this procedure. Return to the CI level of the MAP screen by typing

**>QUIT ALL**

and pressing the Enter key.

---

## Clearing a SYSBNA alarm

---

### Clearing a SYSBNA alarm

#### *At the MAP terminal*

- 1 Access the PM level of the MAP screen by typing

**>MAPCI ;MTC ;PM**

and pressing the Enter key.

*Example of a MAP screen:*

	SysB	ManB	OffL	CBsy	ISTb	InSv
PM	1	1	1	3	2	12

- 2 Display all the system-busy SPMs by typing

**>DISP STATE SYSB SPM**

and pressing the Enter key.

- 3 Record the number of the SPMs.

- 4 Post each system-busy-not-available SPM by typing

**>POST SPM <spm\_no>**

and pressing the Enter key.

*where*

**spm\_no**

is the number of the SPM (0 to 85)

*Example of a MAP screen:*

```

XAC      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.        .        NO AMA  Istb    1 DPT  2  RS   .      81C..  1 Maj  SBS D+
          *C*          *C*          *C*          *C*          *C*          *C*
SPM
0 Quit          PM          0      0      0      0      11     12
2 Post_        SPM          0      0      0      0      3      0
3 ListSet
4 ListRes      SPM    0  ISTb  Class: IW      BRG_Only
5 Trns1
6
7 ATMConn      Sh1f0 SL A Stat  Sh1f0 SL A Stat  Sh1f1 SL A Stat  Sh1f1 SL A Stat
----- 1 - ----  CEM 1 8 I ISTb  ----- 1 - ----  ----- 8 - ----
8           ----- 2 - ----  GEM 0 9 A ISTb  ----- 2 - ----  ----- 9 - ----
9           ----- 3 - ----  GEM 1 10 I ManB ----- 3 - ----  ----- 10 - ----
10          ----- 4 - ----  ----- 11 - ----  ----- 4 - ----  ----- 11 - ----
11 Disp_      ----- 5 - ----  ----- 12 - ----  ----- 5 - ----  ----- 12 - ----
12 Next       ----- 6 - ----  ----- 13 - ----  ----- 6 - ----  ----- 13 - ----
13 Select_    CEM 0 7 A ISTb  ----- 14 - ----  ----- 7 - ----  ----- 14 - ----
14 QueryPM
15 ListAlm
16
17 SPERFORM
18 Upgrade_
   BHARSH
Time 13:12 >|
    
```

5 List the status of the ENET links by typing

>TRNSL

and pressing the Enter key.

*Example of a MAP screen:*

```

SPM    11 CEM    0 Act    SysB (NA)

Loc : Row F  FrPos 64 ShPos  6 ShId 0 Slot  7
Default Load: SPMLOAD
Clock:
Input Ref:           Source:           Current Mode:
Trns1
Link 1: ENET 0  0  30  0; Status: OK
Link 2: ENET 1  0  30  1; Status: NA
Link 3: ENET 0  0  30  2; Status: OK
Link 4: ENET 1  0  30  3; Status: OK
    
```

6 Determine whether the ENET links are in service.

<b>If the status of the ENET links is</b>	<b>Do</b>
OK	Step <a href="#">9b</a>
NA or UR	Step <a href="#">7</a>

- 7 Return the ENET links to service. When you have completed the procedure, return to this point.

**Note:** Contact your next level of support if you are not familiar with the procedures required to restore ENET links to service.

- 8 List the alarms on the SPM unit by typing

>**LISTALM**

and pressing the Enter key.

If the alarm list shows	Do
None	Step <a href="#">10</a>
SYSBNA	Step <a href="#">9</a>

- 9 Perform the following substeps to record ENET information:

- a List the status of the ENET links by typing

>**TRNSL**

and pressing the Enter key.

*Example of a MAP screen:*

```
SPM  11 CEM  0 Act   SysB (NA)

Loc  : Row F  FrPos 64 ShPos  6 ShId 0 Slot  7
Default Load: SPMLOAD
Clock:
Input Ref:           Source:           Current Mode:
Trnsl
Link 1: ENET 0  0  30  0; Status: OK
Link 2: ENET 1  0  30  1; Status: NA
Link 3: ENET 0  0  30  2; Status: OK
Link 4: ENET 1  0  30  3; Status: OK
```

- b Record the ENET shelf number (30 in the example above).

- 10 Do the following substeps to determine the MS card numbers:

- a At the CI level of MAP screen, locate the MS card that the ENET is connected to by typing

>**TABLE ENINV**

and pressing the Enter key.

- b Create a heading for the tuple by typing

>**HEADING**

and pressing the Enter key.

**c** Position on the tuple for the ENET shelf by typing

```
>POS <enet_shelf_no>
```

and pressing the Enter key.

where

**enet\_shelf\_no**

is the number of the ENET shelf

*Example of a MAP screen:*

```
CI:
>table eninv
MACHINES NOT IN SYNC - DMOS NOT ALLOWED
JOURNAL FILE UNAVAILABLE - DMOS NOT ALLOWED
TABLE: ENINV
>heading
ENKEY ENCLASS FRTYPE FRNO   FRPEC   SHPEC MSCARD0 MSLINK0 MSPORT0 FLOOR0
ROW0 FRPOS0 SHELF0                LOAD0 MSCARD1 MSLINK1 MSPORT1
FLOOR1 ROW1 FRPOS1 SHELF1                LOAD1
-----
>pos 0
  0   PRI   ENC   0 NT9X05AB NT9X0801     6     0     0     1
  F    2   39                ENX08AX    10     0     0
  1   F    1   39                ENX08AX
```

**d** Record the MS card numbers under MSCARD0 and MSCARD1 (6 and 10 in the previous example).

**11** Locate the MS cards by typing

```
>MAPCI;MTC;MS;SHELF 0;CARD <ms_card_no>
```

and pressing the Enter key.

where

**ms\_card\_no**

is the number of the MS card

*Example of a MAP screen:*

```

Message Switch   Clock   Shelf  0           Inter-MS Link 0 1
MS 0             .       Master   F           R R
MS 1             S       Slave    C           C C

Shelf 0
Card 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6 7 8 9 0 1 2 3 4 5 6
Chain          < > < > < > < > |   |   |
MS 0           . . . . . F . . . . F . . . . . - . . . . . F .
MS 1           C C C C C C C C C C C C C C C C C C - C C C C C C C

Card 06 Protocol Port  0____3  4____7  8____11  12____15
MS 0           . DS512  64 . . . . . P P . . . .
MS 1           C DS512  64 C P P P P P P P P P P P P P P
    
```

- 12 Do the following substeps to check the status of both ports (0 and 1) on both MS cards (MSCARD0 and MSCARD1).
  - a Determine the state of each MS card port that connects to the SPM with the SYSBNA alarm, by typing

>TRNSL <ms\_card\_port>

and pressing the Enter key.

where

**ms\_card\_port**

is the number of the MS card port (0 or 1)

*Example of a MAP screen:*

```

PORT 20=SPM 10 (OK ,P:NA SYST ACC NP MSRR ^PSRR)
PORT 21=SPM 10 (OK ,P:NA SYST ACC NP MSRR ^PSRR)
PORT 22=SPM 11 (OK :UR SYST ACC NP MSRR PSRR)
PORT 23=SPM 11 (OK :UR SYST ACC NP MSRR PSRR)
PORT 24=SPM 12 (OK :AV SYST ACC NCP MSRR PSRR)
    
```

- b Repeat Step 12a for the second MS port.
- c Repeat Step 11 for the other MS card and repeat steps 12a and 12b to check the MS ports on that card.

If the status of the MS ports shows	Do
OK for all four ports	Step 15
NA or UR for any port	Step 13

- 13** Return the MS ports to service. When you have completed the procedure, return to this point.

**Note:** Contact your next level of support if you are not familiar with the procedures required to restore MS ports to service.

- 14** List the alarms on the SPM unit by typing

>**LISTALM**

and pressing the Enter key.

If the alarm list shows	Do
None	Step <a href="#">16</a>
SYSBNA	Step <a href="#">15</a>

- 15** For further assistance, contact the personnel responsible for the next level of support.

- 16** You have completed this procedure. Return to the CI level of the MAP screen by typing

>**QUIT ALL**

and pressing the Enter key.

---

## Allowing/inhibiting alarm reporting

---

Alarm reporting is configured via datafill. Datafilling an alarm with a “RPT” option allows alarm reporting. The “NRPT” option inhibits alarm reporting. The procedure that follows shows an example of datafilling the COTLOW and MFLOW alarms in table MNNODE. The COTLOW alarm is configured to be reported, while the MFLOW alarm is configured to not be reported.

### Example of alarm reporting configuration

#### *At the MAP level*

- 1 Access table MNNODE by typing  
**>TABLE MNNODE**  
and pressing the Enter key.
- 2 Begin the table addition by typing  
**>ADD**  
and pressing the Enter key.
- 3 Answer each of the prompts with the required datafill provided by the table range.

#### **Example**

This is an example of datafilling table MNNODE.

```
>ADD
ENTER Y TO CONTINUE PROCESSING OR N TO QUIT
>Y
NODEKEY :
>SPM 1
ALIAS :
>ALARMREPORTS
CLASS :
>DMSCP
FLOOR :
>0
CLKMODE :
>SYNC
```

```
CLKREF :
>INTERNAL
LEDTIMER :
>15
RSRUTLIM :
>COT 75
RSRUTLIM :
>MF 75
RSRUTLIM :
>$
ALRMCTRL :
>COTLOW MJ RPT
ALRMCTRL :
>MFLOW MN NRPT
ALRMCTRL :
>PATCHFAIL MN RPT
ALARMCTRL :
>$
EXECTAB :
>$
TUPLE TO BE ADDED:
SPM 1 ALARMREPORTS DMSCP 0 SYNC INTERNAL 15
(COT 75) (MF 75) $ (COTLOW MJ RPT) (MFLOW MN
NRPT) (PATCHFAIL MN RPT) $ $
ENTER Y TO CONFIRM, N TO REJECT OR E TO EDIT.
>Y
TUPLE ADDED
JOURNAL FILE INACTIVE
```

**4** Exit table MNNODE by typing

**>QUIT**

and pressing the Enter key.

---

## Configuring alarm severity profiles

---

Alarm severity is configured during datafill. There are four alarm severities that can be datafilled:

- No action (NA)
- Minor (MN)
- Major (MJ)
- Critical (CR)

The procedure that follows datafills a DLC RM in table MNCKTPAK. The procedure shows how to datafill each possible alarm severity.

### Example alarm severity datafill

#### *At the MAP level*

- 1 Access table MNCKTPAK by typing  
**>TABLE MNCKTPAK**  
and pressing the Enter key.
- 2 Begin the table addition by typing  
**>ADD**  
and pressing the Enter key.
- 3 Answer each of the prompts with the required datafill provided by the table range.

#### Example

This is an example of datafilling table MNCKTPAK.

```
>ADD  
ENTER Y TO CONTINUE PROCESSING OR N TO QUIT  
>Y  
CPKKEY:  
>SPM 1 1 1  
CPKTYPE:  
>DLC  
UNITNO:  
>0  
DSPGRPID:
```

```
>1
WRKSPR :
>WORKING
ALRMCTRL :
>SYSB CR RPT
ALRMCTRL :
>MANB MJ RPT
ALRMCTRL :
>ISTB MN RPT
ALRMCTRL :
>PROTFAIL NA NRPT
PEC :
>NTLX72BA
RELEASE :
>01
LOAD :
>DLC16AC
TUPLE TO BE ADDED:
SPM 1 1 1 DLC 0 1 WORKING (SYSB CR RPT) (MANB
MJ RPT) (ISTB MN RPT) (PROTFAIL NA NRPT)
NTLX72BA 01 DLC16AC
ENTER Y TO CONFIRM, N TO REJECT OR E TO EDIT.
>Y
TUPLE ADDED
```

- 4 Exit table MNCKTPAK by typing  
>QUIT  
and pressing the Enter key.

## Correlating Logs with alarms to further isolate faults

Alarms and logs are often related to each other when a particular fault condition exists. The following table correlates alarms and logs together to help isolate faults.

### SPM alarm to log correlation

Alarm	Related logs	Probable cause
CLKOOS	CLOCK500	No synchronization source available. The MS has lost its synchronization reference or no SONET synchronization reference of sufficient quality is available.
HLDOVR	SPM341, SPM501, SPM641	Two possible causes: 1. The CEM clocks have lost network synchronization 2. The SRM has gone into the holdover mode as a result of loss of reference signals. The alarm clears when holdover is exited.
HLDOVR24	SPM342, SPM501, SPM642	Two possible causes: 1. The CEM clocks have not be synchronized with the network for 24 hours or more 2. The SRM has gone into the holdover mode as a result of loss of reference signals for 24 hours or more. The alarm clears when holdover is exited.
ISTB	SPM300, SPM331, SPM500, SPM630	The SPM is in service, but is experiencing non-service-affecting faults. Indicates RM has gone into trouble state due to the failure of internal diagnostics or BITS carrier related problems.
LOR (Loss of BITS Link Redundancy)	SPM311, SPM344, SPM644	Two possible causes: 1. One of the BITS links for the SRM is out of service, causing the SRM to lost BITS link redundancy. 2. A software exception report (SWER) has occurred.

**SPM alarm to log correlation**

<b>Alarm</b>	<b>Related logs</b>	<b>Probable cause</b>
MANB	SPM300, SPM331, SPM500, SPM630	A device on the SPM is in a manual busy state. Indicates RM has gone into MANB state due to manual maintenance from the MAP interface.
MANBNA	SPM600	The SPM is in ManB state and is isolated from the ENET links or the MS ports.
NOSPARE	SPM300, SPM331	The last spare module in a protection group is not available for service.
PROTFAIL	SPM300, SPM331, SPM500	Protection switching failed for an RM.
SYSB	NODE500, SPM300, SPM331, SPM500, SPM630	A device on the SPM is in a system busy state. Indicates RM has gone into SYSB state due to loss of communications or hardware fault.
SYSBNA	ENET311	The SPM node is system busy and not accessible, and a network error has caused it to be isolated from the ENET links or the MS ports.

---

## Viewing logs

---

### Viewing logs

#### *At the MAP level*

- 1 Access the logutil level by typing  
>**LOGUTIL**  
and pressing the Enter key.
- 2 Display logs on your MAP screen by typing  
>**START**  
and pressing the Enter key.

---

## Stop logs

---

### Stop logs

#### *At the MAP level*

- 1 Access the logutil level by typing  
>**LOGUTIL**  
and pressing the Enter key.
- 2 Stop the display of logs on your MAP screen by typing  
>**STOP**  
and pressing the Enter key.

---

## Retrieving the most recent log

---

### Retrieving the most recent log

#### *At the MAP terminal*

- 1 Access the log utility level of the MAP screen by typing

```
>LOGUTIL
```

and pressing the Enter key.

- 2 Display the log by typing

```
>OPEN <logname> <lognumber>
```

and pressing the Enter key.

**logname**

is the name of the log

**lognumber**

is the number of the log

Example

```
>OPEN SPM 311
```

**Note:** Omitting a log number displays the most recent entry for all of the log numbers associated with a log name.

- 3 You have completed this procedure.

---

## Add log to display

---

### Add log to display

#### *At the MAP level*

- 1 Access the logutil level by typing  
>**LOGUTIL**  
and pressing the Enter key.
- 2 Ensure the log utility on the current device is stopped by typing

>**STOP**

and pressing the Enter key.

*Examples of a MAP screen output:*

```
Device <device> not found  
This device stopped.  
<device> is already stopped.
```

where

**device**

is the device on which the logs are running

- 3 Delete the log from displaying by typing

>**DELREP <device> <rep name>**

and pressing the Enter key.

where

**device**

is the device on which the logs are running

**rep name**

is the name of the report (log), for example, PM, CM, IOD, etc.

If the log had been added previously, delrep allows a clean startup when adding the log.

- 4 Add report of logs to display by typing

>**ADDREP <device> <rep name>**

and pressing the Enter key.

where

**device**

is the device on which the logs are running

**rep name**

is the name of the report (log) you wish to display (for example, PM, CM, IOD, etc.)

---

## Delete log from display

---

### Delete log from display

#### *At the MAP level*

- 1 Access the logutil level by typing

>**LOGUTIL**

and pressing the Enter key.

- 2 Delete selected reports from displaying by typing

>**DELREP <device> <rep name>**

and pressing the Enter key.

where

**device**

is the device logs are running on

**rep name**

is the name of the report (log) you wish to suppress (for example, PM, CM, IOD, etc.)

## Replacing a GEM circuit pack

The procedure describes the process to replace a GEM circuit pack in an IW SPM IP card cage.

The [Variable Abbreviations](#) table defines the variables used in this procedure.

### Variable Abbreviations

Abbreviation	Definition
spm_no	the SPM number assigned to the IW SPM IP (0 to 85)
gem_no	the number of the GEM card (0 or 1)
from_unit_no	the number of the active unit (0 or 1)
to_unit_no	the number of the inactive unit (0 or 1)

This procedure requires pressing the Enter key after typing a command.

### At the MAP terminal

- 1 Access the PM screen level of the MAP display by typing  
**>MAPCI ;MTC ;PM**
- 2 Access the SPM screen by typing  
**>POST SPM spm\_no**

*Example of a MAP screen:*

```

Shlf0 SL A Stat  Shlf0  SL  A  Stat  Shlf0 SL  A  Stat  Shlf0 SL  A  Stat
---- 1 -- ---  CEM 1  8  I  InSv  ---- 1  -- ---  ----  8 -- ---
---- 2 -- ---  GEM 0  9  A  InSv  ---- 2  -- ---  ----  9 -- ---
---- 3 -- ---  GEM 1 10  I  InSv  ---- 3  -- ---  ---- 10 -- ---
---- 4 -- ---  ---- 11 -- -----  ---- 4  -- ---  ---- 11 -- ---
---- 5 -- ---  ---- 12 -- -----  ---- 5  -- ---  ---- 12 -- ---
---- 6 -- ---  ---- 13 -- -----  ---- 6  -- ---  ---- 13 -- ---
CEM 0 7  A  InSv  ---- 14 -- -----  ---- 7  -- ---  ---- 14 -- ---

```

- 3 Access the appropriate card by typing  
**>SELECT GEM gem\_no**

*Example of an GEM MAP screen:*

```
SPM 7 GEM 0 Act InSv
```

```
Loc : Row D FrPos 32 ShPos 6 ShId 0 Slot 9 Prot Grp : 1
Default Load: GEM20BW Prot Role: Working
```

**4** From the GEM screen, type

**>PROT**

*Example of an GEM MAP protection screen:*

```
SPM 7 InSv
Prot Grp: GEM_GRP 1 Mode: Non-revertive Schema: one_plus_one
Sh0 U R A Stat Sh0 U R A Stat Sh1 U R A Stat Sh1 U R A Stat
1 - - - - - 8 - - - - - 1 - - - - - 8 - - - - -
2 - - - - - 9 0 W A InSv 2 - - - - - 9 - - - - -
3 - - - - - 10 1 S I InSv 3 - - - - - 10 - - - - -
4 - - - - - 11 - - - - - 4 - - - - - 11 - - - - -
5 - - - - - 12 - - - - - 5 - - - - - 12 - - - - -
6 - - - - - 13 - - - - - 6 - - - - - 13 - - - - -
7 - - - - - 14 - - - - - 7 - - - - - 14 - - - - -
```

**5** At the Protection (PROT) screen, determine if the GEM being replaced is active (A) or inactive (I). If the card is active, set it to the inactive state by typing

**>MANUAL from\_unit\_no to\_unit\_no**

**At the GEM RM card level**

**6** Take the card to be replaced out-of-service by typing

**>BSY**

**7** Set the card offline (OffL) by typing

**>OFFL**


**8** Wait for the circuit pack to change state and then return to the SPM screen.

**Note:** The state change from ManB to OffL (offline) can take up to one minute to complete. After the state change completes, remove the card.


9

	<p><b>CAUTION</b> Static electricity damage While handling circuit cards or cables, wear a wrist strap connected to the wrist-strap grounding point on the frame. This protects the cards against damage caused by static electricity.</p>
--	--

As shown in the following figure, unlock the access doors to shelf 0 by turning the locking screw one quarter turn counter clockwise. The doors are unlocked when the slot in the locking screw is in the vertical position. Open the access doors by carefully pulling down on the spring lock at the top of each door. At the same time, carefully pull each door toward you using the finger grip at the bottom of the door. Slide the doors back into the retracted position.

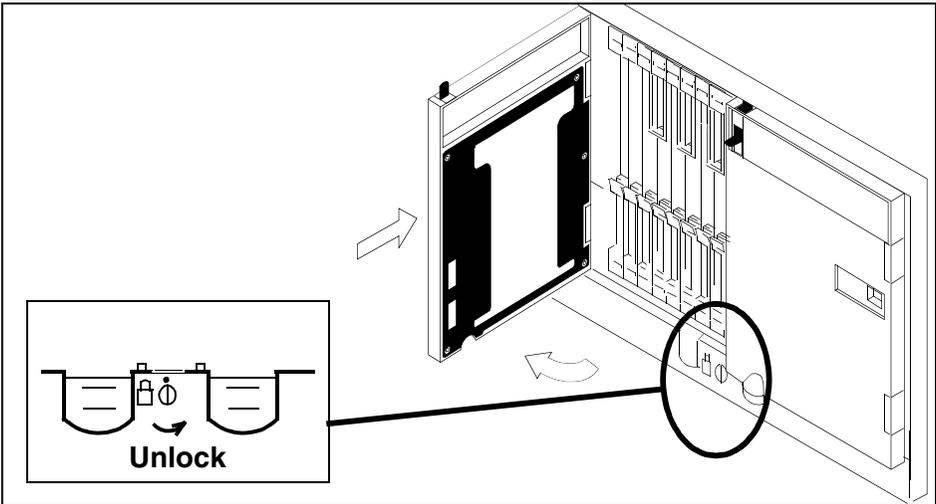

10 As shown in the following figure, unlatch the cable-trough door by grasping the thumb grips and pulling up. Rotate the cable-trough door to the open position.

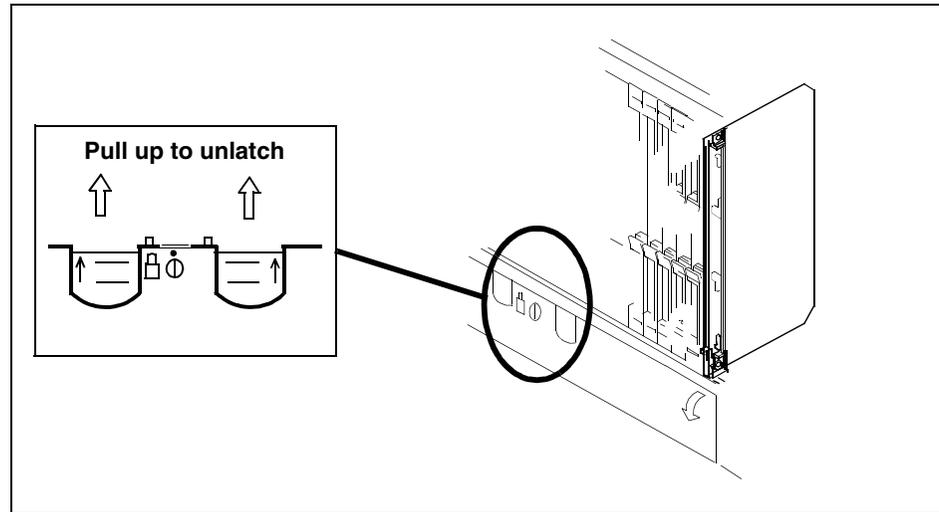

11

**DANGER****Laser radiation exposure**

The exposed ends of fiber optic cables can emit harmful laser radiation. Do not look at the ends of fiber optic cables unless protector caps are in place. Disconnect all laser sources when personnel are working with fiber-optic cables.

**CAUTION****Damage to fiber cables**

Take care when handling fiber cables. Do not crimp or bend fiber cables to a radius of less than 1 in. (25 mm).


The NTLZ20BA GEM card uses a 1000bSX short haul, multi-mode cable with an MTRJ connector.

Disconnect the fiber cable from the faceplate of the card.


- 12 After the cable has been removed, cap the connectors on the circuit pack and the fiber cable. Store the cable in the cable trough.

**Note:** Before removing the card, ensure that the fiber cables are stored below the bottom level of the card shelf to avoid cable damage when the card is removed.


- 13

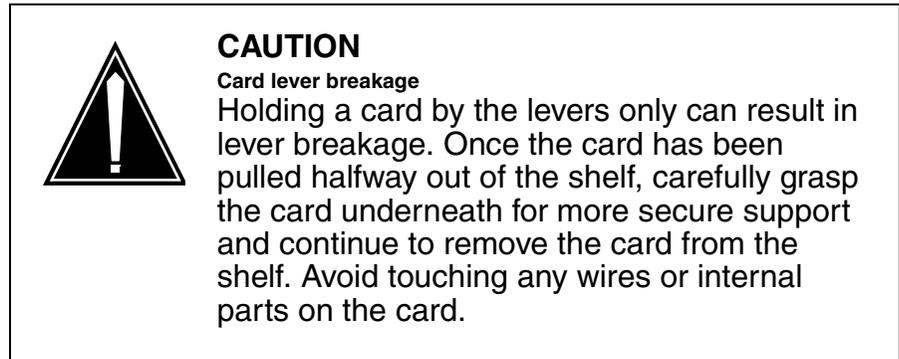

As shown in the following figure, open the locking levers on the card to be replaced.

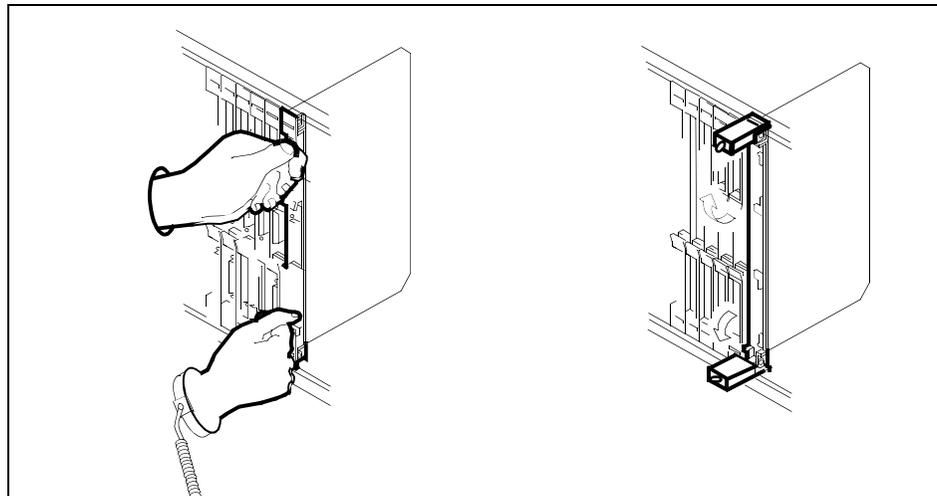

- 14 As shown in the following figure, while grasping the locking levers, gently pull the card towards you until it protrudes about 2 in. (5.1 cm) from the equipment shelf.

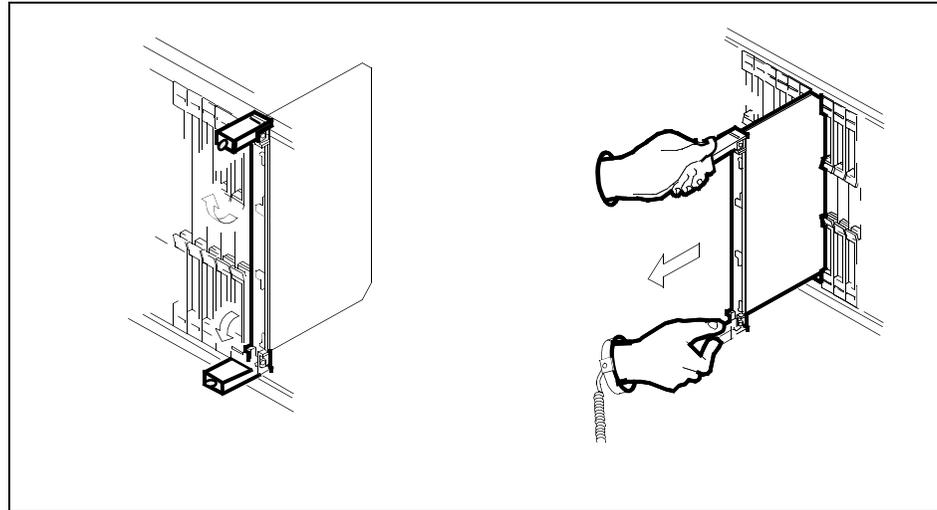


15

**ATTENTION**

Cards can weigh up to 9 lbs (4 kg).

As shown in the following figure, hold the card by the face plate with one hand while supporting the bottom edge with the other hand. Gently pull the card toward you until it clears the shelf.

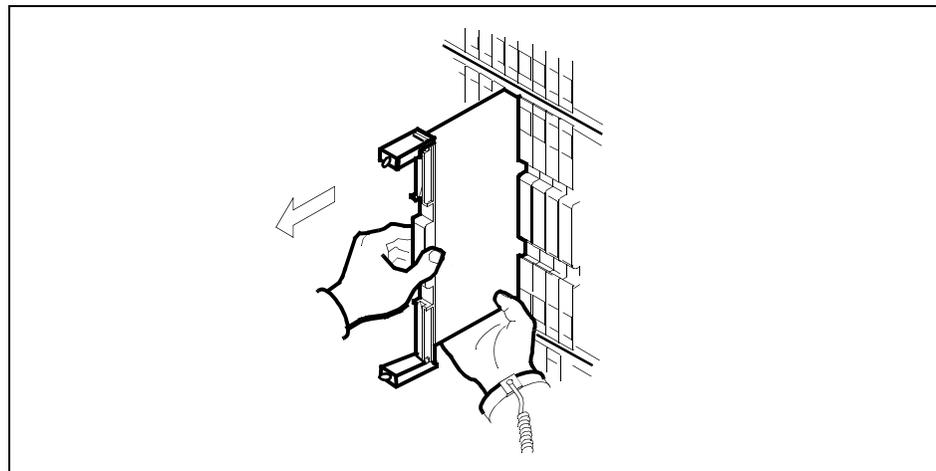

16 Place the card you have removed in an electrostatic discharge (ESD) protective container.

17

**DANGER****Equipment malfunction**

Use a replacement card with the same PEC and release to avoid equipment malfunction. If the replacement card has a different PEC or release, change the datafill in Table MNCKTPAK to match the replacement card before inserting it in the slot.

Use a replacement card with the same PEC and the same release.

18

**ATTENTION**

Examine the fiber connector on the replacement NTLX20BA GEM card and connectors on the fiber cable. To prevent eye damage, do not look directly into the end of the fiber cables. If the fiber connectors and the cable connectors do not mate, replace the fiber connectors on the replacement card. Each replacement card is shipped with two pairs of spare fiber connectors. To select the correct fiber connector, compare the spare fiber connector with the fiber connector on the card you removed. Also check the spare fiber connector against the connector on the fiber cable. Do not connect the fiber cable until instructed to do so.


**CAUTION****Equipment damage due to empty slots**

Equip all unused slots on a powered shelf with NTLX60AA filler modules. Filler modules maintain electromagnetic interference (EMI) integrity, and they maintain shelf airflow patterns to ensure proper cooling.

Insert the replacement card into the shelf. If a replacement card is not available, insert an NTLX60AA filler circuit pack in the slot until a replacement card is available.

19 Open the locking levers on the card.

- 20** As shown in the following figure, hold the card by the face plate with one hand while supporting the bottom edge with the other hand. Gently slide the card into the shelf.

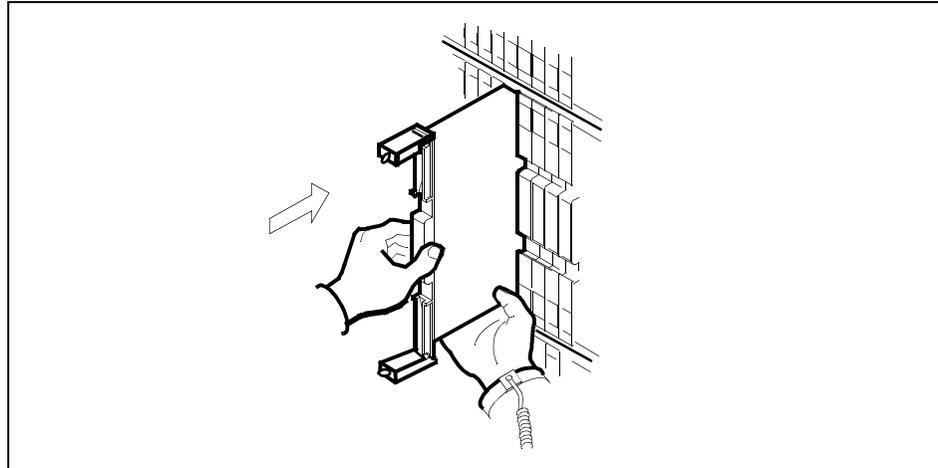

- 21**




**CAUTION**

Damage to fiber cables

Take care when handling fiber cables. Do not crimp or bend fiber cables to a radius of less than 1 in. (25 mm).

Using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure that the card is fully seated in the shelf.

- 22** As shown in the following figure, close the locking levers to secure the card.

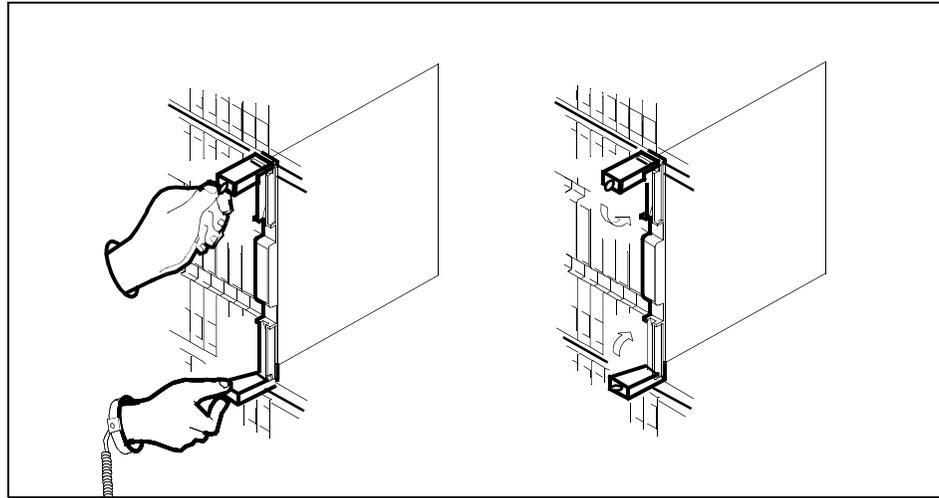

- 23 Wait until the card performs a self-test (less than one minute). The self test is complete when the green LED remains on and the red LED remains off. If both LEDs stay on for an extended period of time, it means the replacement card is defective; remove the card and replace it with another replacement card. If both LEDs remain on with the second replacement card, contact your next level of support.
- 24 Reconnect the cable from the faceplate of the card.
- 25 Close the cable trough door. Close and lock the card-access door.

#### ***At the MAP terminal***

- 26 Return to the GEM screen and take the card from the OffL state to ManB state by typing  
>BSY
- 27 Load the new card with the default software load by typing  
>LOADMOD  
Monitor the progress of the loading activity on the SPM line of the screen.
- 28 Return the new card to Insv state by typing  
>RTS

**Note:** The state change from ManB to Insv can take up to seven minutes to complete.

- 29 Apply available patches to the replacement card through the PRSM tool by typing

```
>PRSM;ISTBAUDIT SPM spm_no GEM gem_no
```

*Example*

```
>PRSM;ISTBAUDIT SPM 7 GEM 0
```

- 30 To ensure sparing capability of the new RM, set the new card to active (A). To do this, access the Protection (PROT) screen from the GEM screen and type

```
>MANUAL from_unit_no to_unit_no
```

**Note 1:** Protection switching the card normally requires protection switching of the network devices connected to the card on the external network. Refer to the appropriate manufacturer's documentation for the connected equipment.

**Note 2:** The MANUAL command without options and the FORCE command can be used only with a CEM card.

- 31 To ensure that the new RM can release activity, repeat [step 30](#).
- 32 You have completed this procedure. Return to the CI level of the MAP screen by typing

```
>QUIT ALL
```

## Replacing a CEM circuit pack

### Replacing a CEM circuit pack

#### At the MAP terminal

1 Access the PM screen level of the MAP display by typing  
**>MAPCI ;MTC ;PM**  
 and pressing the Enter key.

2 Access the SPM screen by typing  
**>POST SPM <spm\_no>**  
 and pressing the Enter key.

where

#### spm\_no

is the number of the SPM (0 to 85)

The following illustration is an example of an SPM screen.  
 This example may not reflect your SPM screen.

```

XAC      MS      IOD      Net      PH      CCS      Lns      Trks      Ext      APPL
.        .        NO AMA   Istb    1 DPT   2  RS    .      81C..   1 Maj   SBS D+
          *C*          *C*    *C*
SPM      SysB    ManB    OffL    Cbsy    ISTb    InSu
0 Quit          PM      0      0      0      0      11     12
2 Post_        SPM      0      0      0      0      3      0
3 ListSet
4 ListRes     SPM    0  ISTb  Class: IW      BRG_Only
5 Trns1
6
7 ATMConn     Sh1f0 SL A Stat  Sh1f0 SL A Stat  Sh1f1 SL A Stat  Sh1f1 SL A Stat
----- 1 - ----  CEM 1  8 I ISTb  ----- 1 - ----  ----- 8 - ----
8           ----- 2 - ----  GEM 0  9 A ISTb  ----- 2 - ----  ----- 9 - ----
9           ----- 3 - ----  GEM 1 10 I ManB  ----- 3 - ----  ----- 10 - ----
10          ----- 4 - ----  ----- 11 - ----  ----- 4 - ----  ----- 11 - ----
11 Disp_      ----- 5 - ----  ----- 12 - ----  ----- 5 - ----  ----- 12 - ----
12 Next       ----- 6 - ----  ----- 13 - ----  ----- 6 - ----  ----- 13 - ----
13 Select_    CEM 0  7 A ISTb  ----- 14 - ----  ----- 7 - ----  ----- 14 - ----
14 QueryPM
15 ListAlm
16
17 SPERFORM
18 Upgrade_
   BHARSH
Time 13:12 >|

```

3 Access the CEM card by typing  
**>SELECT CEM <cem\_no>**  
 and pressing the Enter key.

where

**cem\_no**

is the number of the CEM card (0 or 1)

The following illustration is an example of a CEM screen.

CM	MS	IOD	Net	PM	CCS	Lns	Trks	Ext	APPL
.	.	.	.	.	.	.	.	.	.

CEM		SysB	ManB	OffL	CBsy	ISTb	InSv
0 Quit	PM	0	0	0	0	0	1
2	<b>SPM</b>	0	0	0	0	0	1
3 Listset	<b>COT</b>	0	0	0	0	0	2
4							
5 Trnsl	SPM 20	CEM 0	Act	INSV			
6 Tst							
7 Bsy	Loc : Row C	FrPos 4	ShPos 6	ShId 0	Slot 7		
8 RTS	Default Load:						
9 Offl	Clock:						
10 LoadMod	Input Ref: Internal	Source: C Side 0	Current Mode: Acquire				
11	<b>POST:</b>						
12 Next	<b>COT:</b>						
13 Select_							
14 QueryMod							
15 ListAlm							
16 Prot							
17							
18							

14:12 >

4 From the CEM screen, type

**>PROT**

and press the Enter key.

The following is an example of a Protection screen.

```

CM      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.      .      .      .      .      .      .      .      .      .

Protectn
0 Quit          PM          SysB  ManB  OffL  Cbsy  ISTb  InSv
2          SPM          0      0      0      0      0      1
3          COT          0      0      0      0      0      2
4
5          SPM  11  InSv
6          Prot Grp: COT  Mode: Non-revertive  Schema: N/A
7 Force        Sh0 U R A Stat  Sh0 U R A Stat  Sh1 U R A Stat  Sh1 U R A Stat
8 Manual      1 -- - - ----  8 1 S I InSv    1 -- - - ----  8 -- - - ----
9            2 -- - - ----  9 -- - - ----  2 -- - - ----  9 -- - - ----
10           3 -- - - ---- 10 -- - - ----  3 -- - - ---- 10 -- - - ----
11           4 -- - - ---- 11 -- - - ----  4 -- - - ---- 11 -- - - ----
12           5 -- - - ---- 12 -- - - ----  5 -- - - ---- 12 -- - - ----
13 Select_    6 -- - - ---- 13 -- - - ----  6 -- - - ---- 13 -- - - ----
14           7 0 S A InSv 14 -- - - ----  7 -- - - ---- 14 -- - - ----
15 ListAlm    PROT:
16
17
18

```

14:10 >

- 5 At the Protection (PROT) screen, determine if the CEM being replaced is active (A) or inactive (I). If the CEM is in service and active, make the CEM inactive by typing

>**MANUAL**

and pressing the Enter key. Monitor the MAP screen to ensure the change of state occurs.

#### **At the CEM screen**

- 6 Take the CEM card out of service by typing

>**BSY**

and pressing the Enter key.

- 7 Confirm the command by typing

>**YES**

and pressing the Enter key.

- 8 Return to the SPM screen and wait for the CEM to change to the manual busy (ManB) state.

**Note:** The state change to ManB may take several minutes to complete.

**At the CEM screen**

- 9 Before removing the CEM card, you must change the state of the ENET links to ManB. Perform the following substeps to record the applicable ENET information:

- a List the ENET links by typing

**>TRSL**

and pressing the Enter key.

*Example of a MAP screen:*

```
SPM   11 CEM   0 InAct   ManB           /
Loc  : Row C  FrPos  4 ShPos  6 ShId 0 Slot  7
Default Load: SPMnnnn
Clock:
Input Ref:           Source:           Current Mode:
Trnsl
Link 1: ENET 0 X 14 0; Status: OK
Link 2: ENET 0 X 14 1; Status: OK
Link 3: ENET 0 Y 14 2; Status: OK
Link 4: ENET 0 Y 14 3; Status: OK
```

**Note:** In this example, the dual self configuration for X and Y are two different shelves, and the single shelf configuration for X and Y is one shelf.

- b Record the ENET plane, shelf, and slot number (0, X, 14 and 1, X, 14 in the example above).

- 10 Go to the ENET level of the MAP by typing

**>MTC;NET**

and pressing the Enter key.

The following is an example of an ENET screen.

```

CM      MS      IOD      Net      PM      CCS      Lns      Trks      Ext      APPL
.       .       .       .       .       .       .       .       .       .

CEM
0 Quit      ENET      System  Matrix  Shelf 0 1 2 3
2          Plane 0 CSLink Fault      F - - -
3 QueryEN   Plane 1 CSLink .          F - - -
4 Locate    MTC:
5 Deload_   ENET:
6
7
8
9
10
11 RExTst_
12 BERT
13 Integ
14 Pathtest
15 System
16 Matrix
17 Shelf_
18

14:12 >

```

- 11 Go to the ENET-shelf level of the MAP by typing

```
>SHELF <shelf_no>
```

and pressing the Enter key.

*where*

**shelf\_no**

is the number of the ENET shelf (0 to 3) that holds the card

*Example of a MAP screen:*

```

SHELF 00 Slot      1111111 11122222 22222333 333333
          123456 78 90123456 78901234 56789012 345678
Plane 0   . .   .F ..OO.F-- ----- ..OO.F.. . .
Plane 1   . .   .F ..OO..F-- ----- ..OO.F.. . .

SHELF:

```

- 12 Locate the first ENET card by typing

```
>LOCATE 0 <slot_no>
```

and pressing the Enter key.

where

**slot\_no**

is the slot number on the ENET shelf (0 to 38)

*Example of a MAP screen:*

```
Request to LOCATE ENET Plane:0 Shelf:00 Slot:14 submitted
Request to LOCATE ENET Plane:0 Shelf:00 Slot:14 passed.
Site Flr RPos Bay_id Shf Description Slot EqPEC
HOST 01 A02 ENC 000 39 ENET:0:00:14 14 9X35BA FRNT
HOST 01 A02 ENC 000 39 ENET:0:00:14 14 9X40DA BACK
```

Verify that the ENET card in the back of the slot has PEC 9X40DA.

- 13** If dual-shelf connections are used, locate the second ENET card by typing

**>LOCATE 1 <slot\_no>**

and pressing the Enter key.

where

**slot\_no**

is the slot number on the ENET shelf (0 to 38)

*Example of a MAP screen:*

```
Request to LOCATE ENET Plane:1 Shelf:00 Slot:14 submitted
Request to LOCATE ENET Plane:1 Shelf:00 Slot:14 passed.
Site Flr RPos Bay_id Shf Description Slot EqPEC
HOST 01 A02 ENC 000 13 ENET:1:00:14 14 9X35BA FRNT
HOST 01 A02 ENC 000 13 ENET:1:00:14 14 9X40DA BACK
```

Verify that the ENET card in the back of the slot has PEC 9X40DA.

- 14** Go to the card level of the ENET by typing

**>CARD <slot\_no>**

and pressing the Enter key.

where

**slot\_no**

is the slot number on the ENET card (0 to 38)

*Example of a MAP screen:*

```

SHELF 00 Slot      1111111 11122222 22222333 333333
          123456 78 90123456 78901234 56789012 345678
Plane 0   . . .F .....F. ----- ...S.... . .
Plane 1   . . .F .....F. ----- ..FS.... . .

CARD 14 Front:      Back:      DS-512 Links
          Xpt        I/F        0 1 2 3
Plane 0   .         .         . . . .
Plane 1   .         .         . . . .
CARD:
    
```

- 15** Translate the peripheral-side links of the ENET by typing  
**>TRNSL P <plane\_no> <link\_no>**  
 and pressing the Enter key.

*where*

**plane\_no**

is the number of the ENET plane (0 or 1)

**link\_no**

is the number of an ENET link (0 to 3)

*Example of a MAP screen:*

```

Request to TRNSL ENET Plane:0 Shelf:00 Slot:14 Link:00 submitted.
Request to TRNSL ENET Plane:0 Shelf:00 Slot:14 Link:00 passed.
ENET Plane:0 Shelf:00 Slot:14 Link:00 :
  SPM 11 CEM 0 Lnk 1
    
```

Repeat the TRNSL P command to determine all four ENET P-side links to the CEM being replaced. Record the link connections. The following example shows the ENET links for a typical dual-shelf SPM connection.

**ENET links for a typical dual-shelf SPM connection**

ENET Plane	Link	SPMCEM	Link
0	0	0	1
0	1	0	2
0	2	0	3
0	3	0	4
1	0	1	1
1	1	1	2

**ENET links for a typical dual-shelf SPM connection**

ENET Plane	Link	SPMCEM	Link
1	2	1	3
1	3	1	4

**16****CAUTION****Loss of service**

A temporary interruption of service occurs when ENET links are busied. The interruption can affect data calls.

Busy (BSY) the four ENET links to the CEM being replaced by typing

```
>BSY <plane_no> LINK <link_no>
```

and pressing the Enter key.

*where*

**plane\_no**

is the number of the ENET plane (0 or 1)

**link\_no**

is the number of an ENET link (0 to 4)

Repeat the BSY command for each link to the CEM being replaced. Do not busy the links to the other CEM.


**17** Change the PEC field to the new value.

**At the equipment frame****18**




**CAUTION**  
Static electricity damage  
While handling circuit cards or cables, wear a wrist strap connected to the wrist-strap grounding point on the frame. This protects the cards against damage caused by static electricity.

As shown in the following figure, unlock the access doors to shelf 0 by turning the locking screw one quarter turn counter clockwise. The doors are unlocked when the slot in the locking screw is in the vertical position. Open the access doors by carefully pulling down on the spring lock at the top of each door. At the same time, carefully pull each door toward you using the finger grip at the bottom of the door. Slide the doors back into the retracted position.

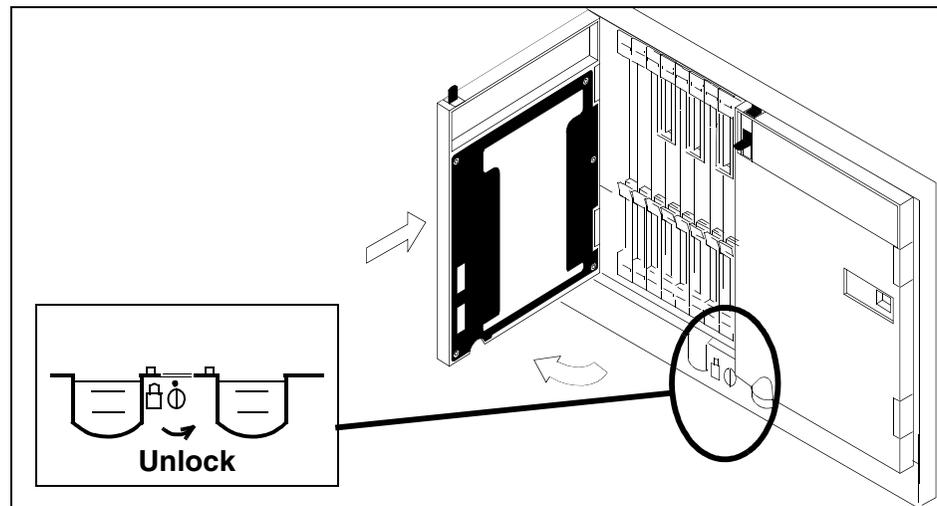

- 19** As shown in the following figure, unlatch the cable-trough door by grasping the thumb grips and pulling up. Rotate the cable-trough door to the open position.

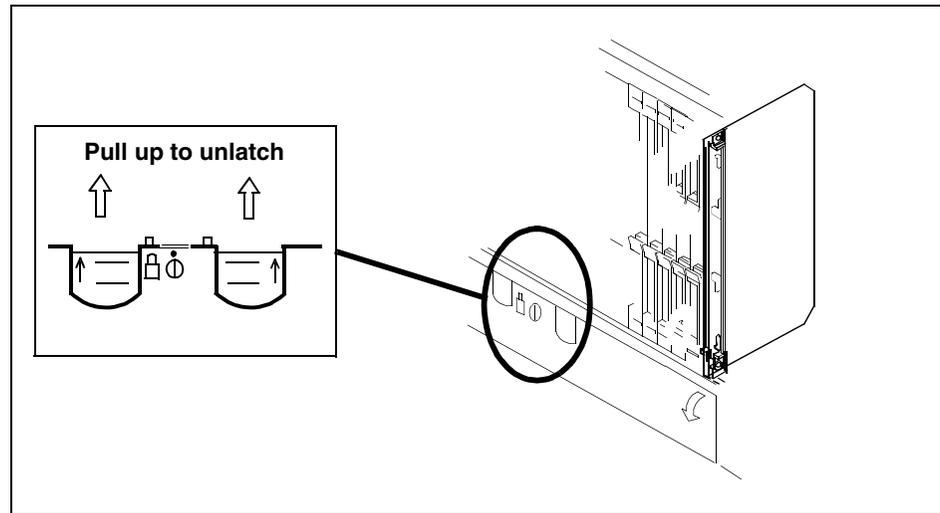


20

**CAUTION****Card lever breakage**

Holding a card by the levers only may result in lever breakage. Once the card has been pulled half way out of the shelf, carefully grasp the card underneath for more secure support and continue to remove the card from the shelf. Avoid touching any wires or internal parts on the card.

As shown in the following figure, open the locking levers on the card to be replaced.

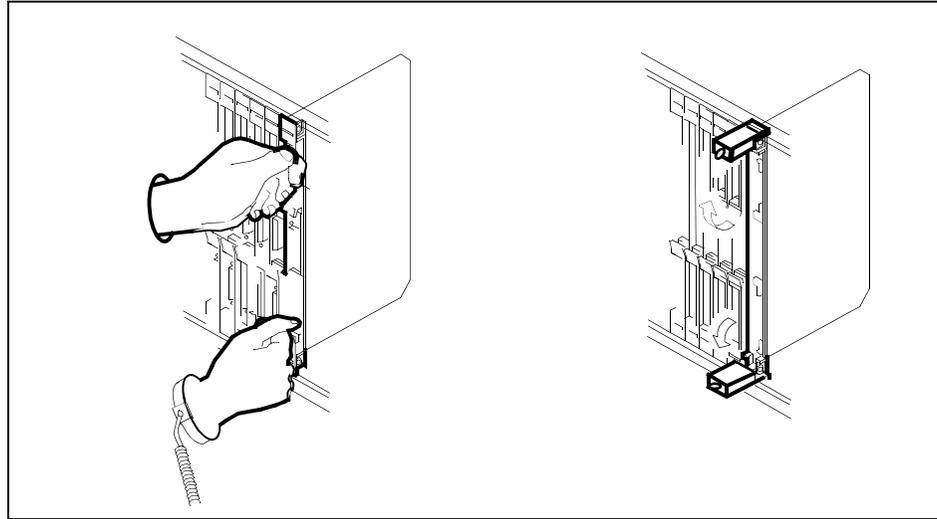

21

**CAUTION****Damage to fiber cables**

Take care when handling fiber cables. Do not crimp or bend fiber cables to a radius of less than 1 in. (25 mm).

Label the DS-512 fiber cables to ensure that they are reconnected in the original order.

22


**DANGER****Laser radiation exposure**

The exposed ends of fiber optic cables can emit harmful laser radiation. Do not look at the ends of fiber optic cables unless protector caps are in place. Disconnect all laser sources when personnel are working with fiber-optic cables.


Refer to the following figure. Disconnect the fiber cables from the faceplate of the card as follows:

- Gently squeeze the locking clips on the connector.
- Pull the connector out of the receptacle.

- After the cables have been removed, cap the connectors on the module and on the fiber cable.
- Store the cables in the cable trough.
- Before removing the CEM card, ensure that the fiber cables are stored below the bottom level of the card shelf to avoid cable damage when the card is removed.

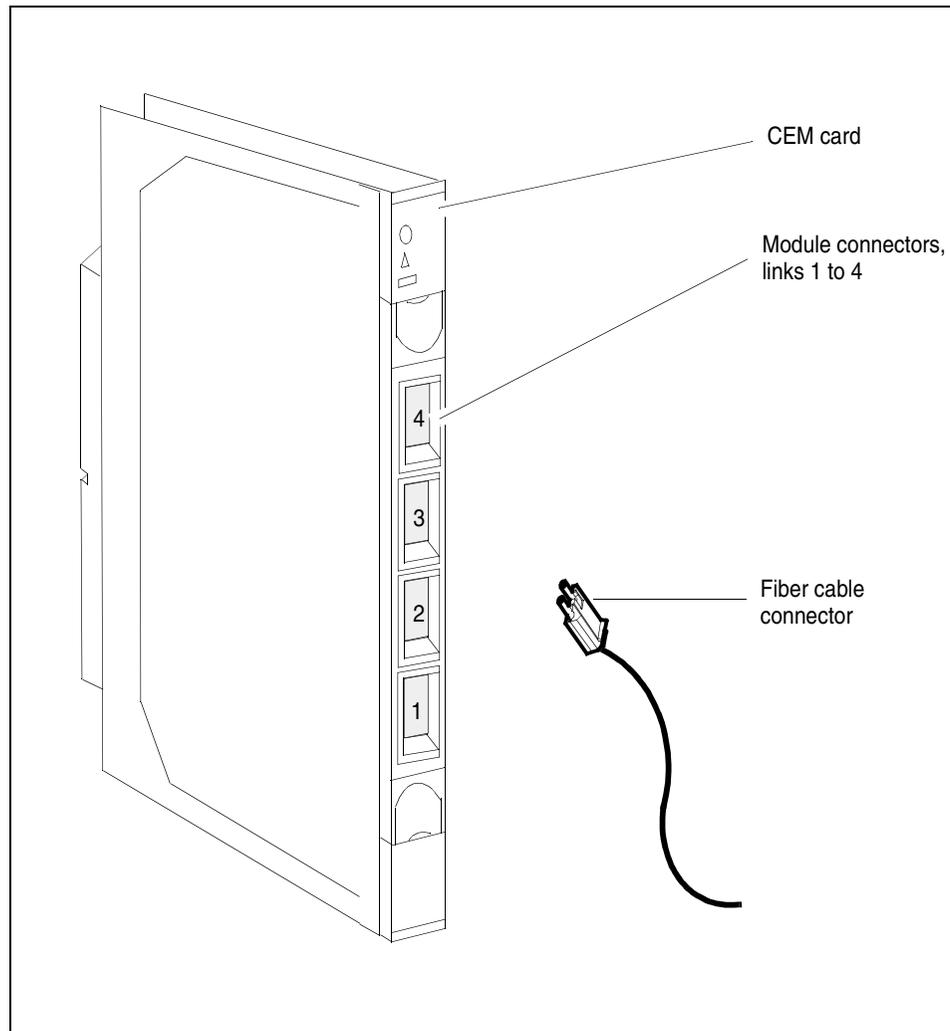


- 23** As shown in the following figure, while grasping the locking levers, gently pull the card towards you until it protrudes about 2 in. (5.1 cm) from the equipment shelf.

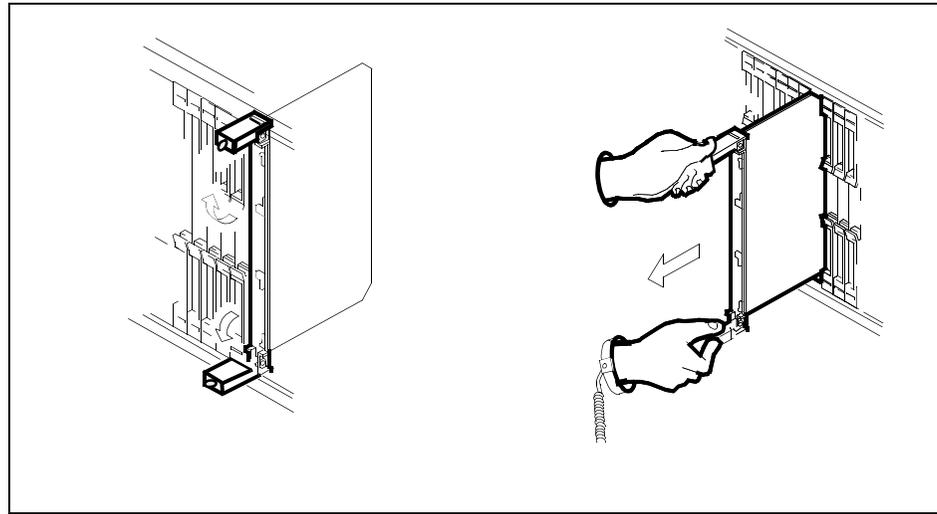**24****ATTENTION**

Cards can weigh up to 9 lbs (4 kg).

As shown in the following figure, hold the card by the face plate with one hand while supporting the bottom edge with the other hand. Gently pull the card toward you until it clears the shelf.

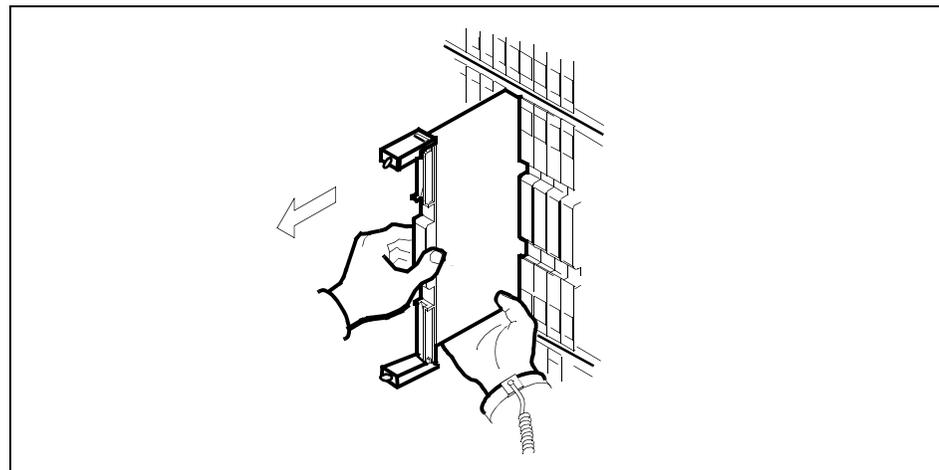

**25** Place the card you have removed in an electrostatic discharge (ESD) protective container.

26


**DANGER****Equipment malfunction**

Use a replacement card with the same PEC and release to avoid equipment malfunction. If the replacement card has a different PEC or release, change the datafill in Table MNCKTPAK to match the replacement card before inserting it in the slot.

Ensure that the replacement card has the same PEC and release number.

**Note:** Refer to the *Data Schema Reference Manual* or the data schema section of the *Translation Guide*, as appropriate, for information about Table MNCKTPAK.

- 27 Insert the replacement CEM card into the shelf.
- 28 Open the locking levers on the card.
- 29 As shown in the following figure, hold the card by the face plate with one hand while supporting the bottom edge with the other hand. Gently slide the card into the shelf.

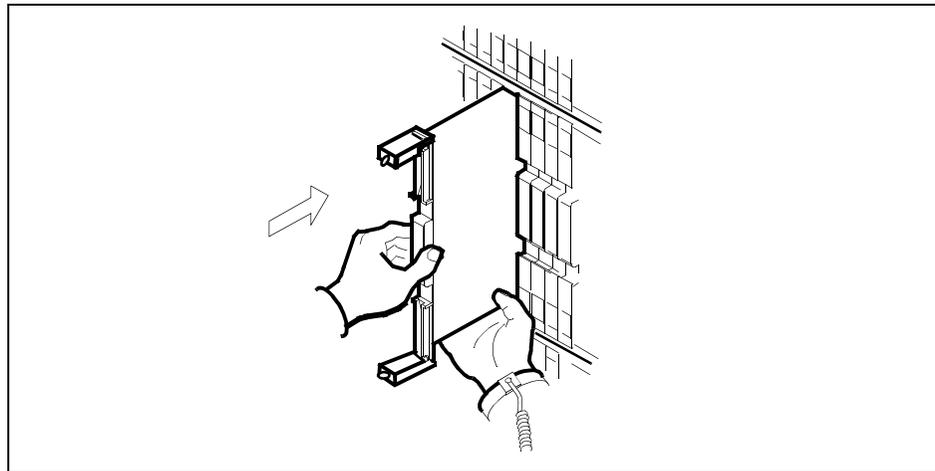


30

**CAUTION****Damage to fiber cables**

Take care when handling fiber cables. Do not crimp or bend fiber cables to a radius of less than 1 in. (25 mm).

As shown in the following figure, using your fingers or thumbs, push on the upper and lower edges of the faceplate to ensure that the card is fully seated in the shelf.

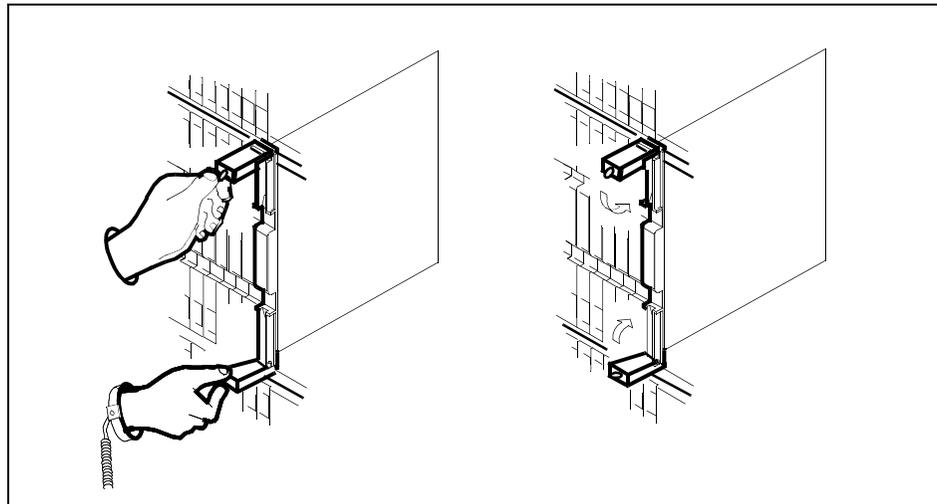

- 31 Close the locking levers to secure the card.
- 32 Wait until the card performs a self test. The self test is complete when the green LED remains on and the red LED remains off. If both LEDs stay on for an extended period of time, the replacement CEM card may be defective; remove the card and replace it with another replacement card. If both LEDs remain on with the second replacement card, contact your next level of support.
- 33 Reconnect the DS-512 fiber cables as follows:
  - Remove the caps on the module and cable connectors.
  - Gently guide the cable connector into its receptacle notches.
  - Squeeze the locking clip and gently push the connector into the receptacle until it clicks into place.
- 34 Close the cable-trough door. Close and lock the card-access door.

**At the MAP terminal:**

- 35** Return-to-service (RTS) the four ENET links to the replacement CEM by typing

```
>RTS <plane_no> LINK <link_no>
```

and pressing the Enter key.

where

**plane\_no**

is the number of the ENET plane (0 or 1)

**link\_no**

is the number of an ENET link (0 to 4)

Repeat the RTS command for each link to the replacement CEM.

- 36** At the CEM screen, reset the replacement CEM card by typing

```
>RESETMOD FW
```

and pressing the Enter key.

Wait until the MS ports clear and the maintenance activity completes.

- 37** Post the SPM by typing

```
>MAPCI;MTC;PM;POST SPM <spm_no>
```

and pressing the Enter key.

**spm\_no**

is the number of the SPM (0 to 85)

- 38** Select the CEM by typing

```
>SELECT <cem_no>
```

and pressing the Enter key.

where

**cem\_no**

is the CEM number (0 or 1)

- 39** Load the replacement CEM card by typing

```
>LOADMOD
```

and pressing the Enter key.

**Note:** The LOADMOD process can take up to 15 minutes to complete. Monitor the progress at the /Load: indicator at the end of the SPM line on the CEM MAP display.

- 40** Return the replacement CEM card to service by typing  
**>RTS**  
and pressing the Enter key.  
**Note:** The state change from ManB to InSv may take several minutes to complete.
- 41** If the replacement CEM card must be the active CEM, go to the protection (PROT) screen and type  
**>MANUAL**  
and press the Enter key. Monitor the MAP screen to ensure the change of status occurs.
- 42** You have completed this procedure. Return to the CI level of the MAP screen by typing  
**>QUIT ALL**  
and pressing the Enter key.


## Replacing an alarm card assembly (ALM)

### Replacing an alarm card assembly (ALM)

#### *At the front of the equipment frame*


- 1 Move the lock latches of the power cabling interface unit (PCIU) to the unlocked position as indicated on the cover.

#### Lock latches of the PCIU

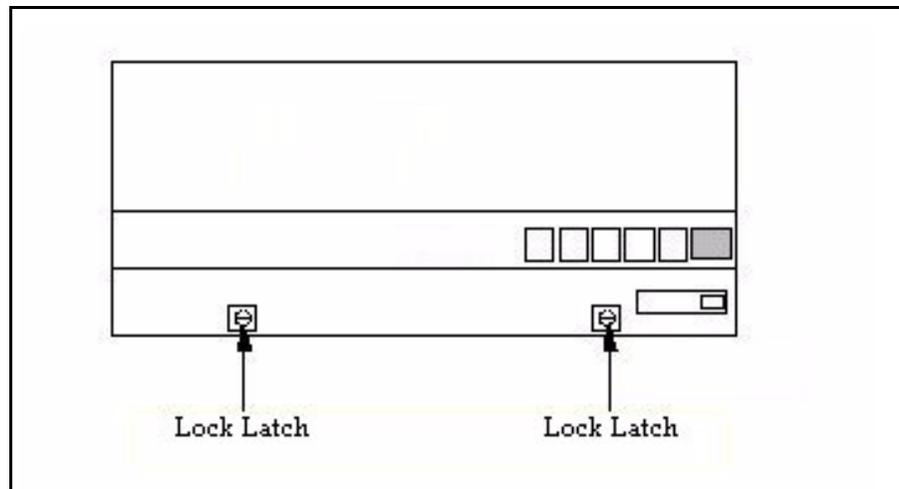


- 2 Lift the cover of the PCIU to gain access to the NTLX58 ALM.

#### Front view of PCIU

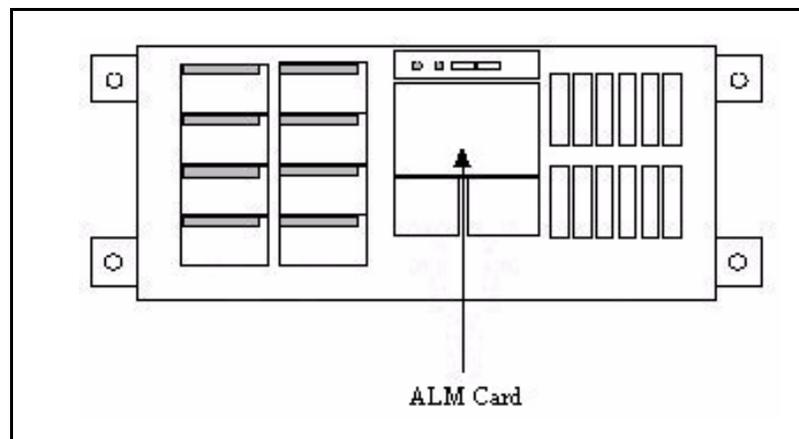

- 3 Unscrew the thumbscrew on the front of the ALM.

## ALM with thumbscrew

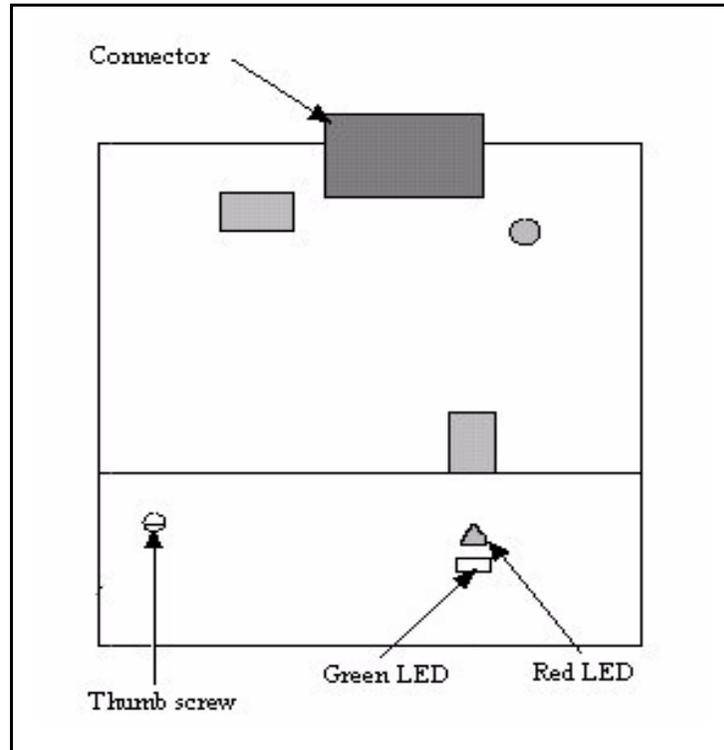

- 4 Remove the card from the shelf.
- 5 Using the right and left edges of the ALM faceplate, remove the card from the shelf. This may require rocking the card slightly from side to side.  
**Note:** When pack is removed the green LEDs on all the fan units will go out, but does not impact the operation of the fans.
- 6 Make a clean, direct insertion, and be sure to fully seat the card.  
Once the pack is inserted the green LEDs on the fan units will light up and the amber SPME frame alarm indicator on the cover of the PCIU will light up temporarily and go out.  
**Note:** Do not rely on the thumb screw to seat the card.
- 7 Tighten the thumb screw.
- 8 Lower the cover of the PCIU shelf and move the latches to the locked position, as indicated on the cover.
- 9 You have completed this procedure.


## Replacing a fan management unit (FMU)

### Replacing a fan management unit (FMU)

#### *At the front of the equipment frame*


- 1 Move the lock latches of the power cabling interface unit (PCIU) to the unlocked position as indicated on the cover.

#### Lock latches of the PCIU

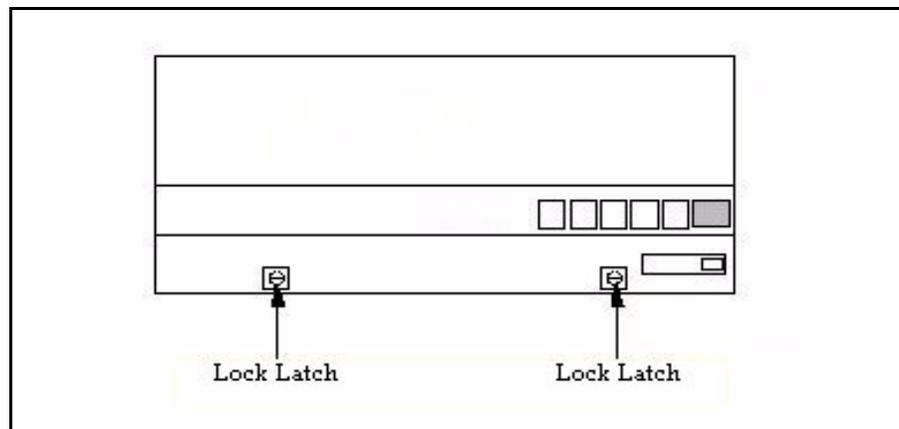

- 2 Raise the cover on the PCIU shelf.

#### Top view of PCIU

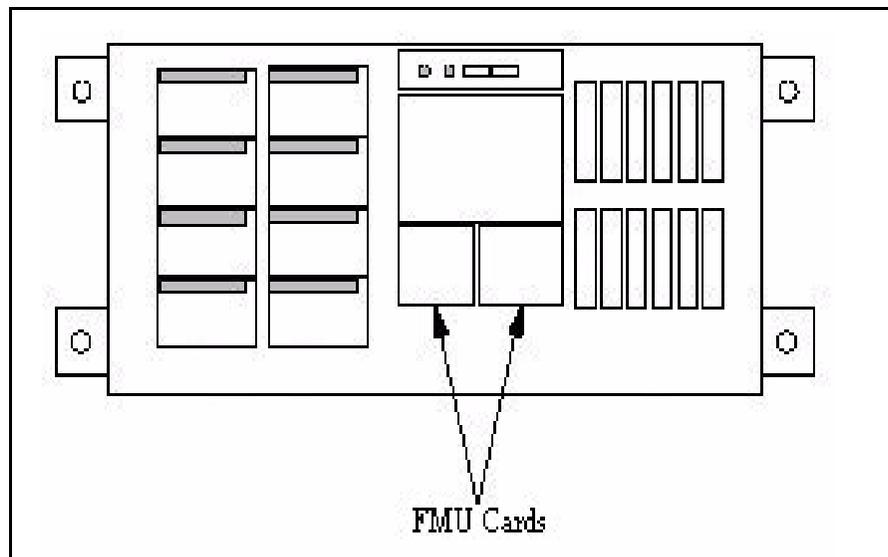


3

**DANGER**

If the fans are not powered down, they will try to conduct current when the new card is inserted, resulting in possible sparks and damage to the new card.

Move the lock latches on each of the eight fan units to the unlocked position as indicated on the faceplate of the fans.

- 4 Reaching inside the faceplate of the fans depress the latch and slide fan unit out a few inches to unseat them from the NTLX55 cooling units in shelf positions XX and YY.
- 5 Wait two to three minutes to allow the fan blades to come to a complete stop. Then completely remove the two fan units, in the upper cooling unit, directly below the FMUs.
- 6 Unscrew the thumb screw on the front of the FMU.

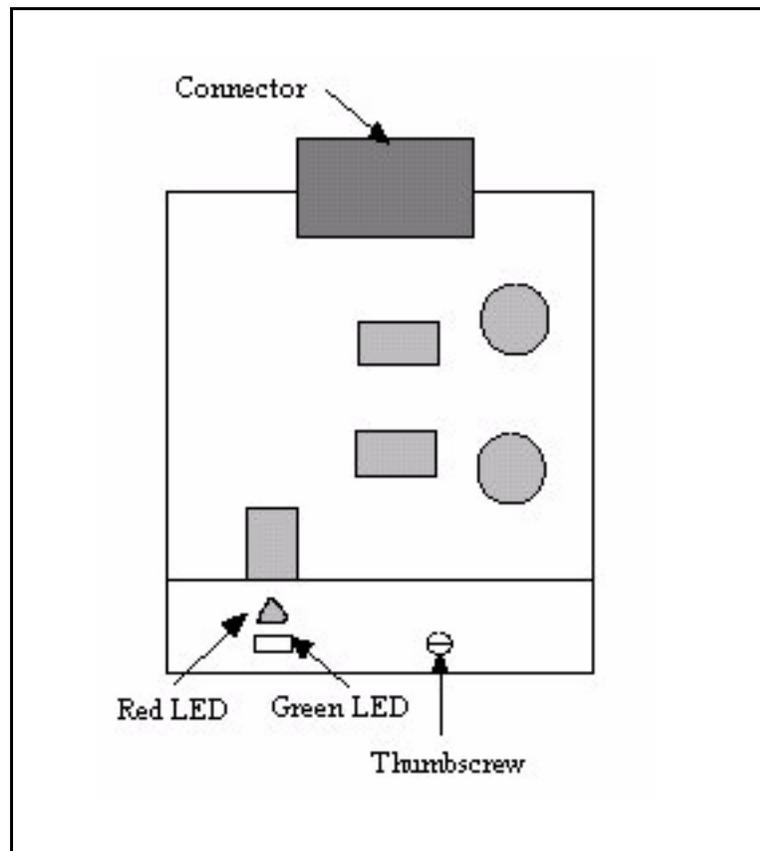**FMU with thumb screw**

- 7 Using the right and left edges of the FMU faceplate, remove the appropriate card from the PCIU.
- 8 Align the new card with the card guides.
- 9 Make a clean, direct insertion, and be sure to fully seat the card.  
**Note:** Do not rely on the thumb screw to seat the card.
- 10 Tighten the thumb screw.
- 11 Re-insert the two fan units removed by holding onto the faceplate of the fan in one hand and folding the fan assembly flat (align with the bar on the fan unit), then inserting it into the slot of the cooling unit. Once fan starts sliding into the slot of the cooling unit, release the fan and allow it to return to its upright position.
- 12 Pushing on the faceplate of the fan units, carefully re-seat them into the NTLX55 cooling units in shelf positions XX and YY.
- 13 Ensure that the green LEDs on the faceplate of the fan units are lit and the fan are running.
- 14 Move the lock latches on the fan units to the locked position as indicated on the faceplate of the fans.
- 15 Lower the cover of the PCIU shelf and move the latches to the locked position, as indicated on the cover.
- 16 You have completed this procedure.

---

## Testing a circuit pack

---

### Testing a circuit pack

#### *At the MAP level*

- 1 Post the SPM containing the circuit pack to test by typing

```
>MAPCI;MTC;PM;POST SPM <spm_no>
```

and pressing the Enter key.

where

**spm\_no**

is the SPM number (0 to 85)

- 2 Select the circuit pack to test by typing

```
>SELECT <rm> <rm_no>
```

and pressing the Enter key.

where

**rm**

is the type of circuit pack

**rm\_no**

is the RM number

- 3 Test the circuit pack by typing

```
>TST
```

and pressing the Enter key.

---

## Retrieve test results

---

### Retrieve test results

#### *At the MAP level*

- 1 Perform the “Testing a circuit pack” section of this document
- 2 The test results will be output to the MAP screen.

#### **Example of test results for passing test**

SPM 3 CEM 0 Test: Request has been submitted.  
SPM 3 Test: Command passed.

#### **Example of test results for failed test**

Command rejected. The CEM is offline.