




Asus Transformer Pad TF103C Rear-Facing Camera Replacement

Replacing the rear-facing camera on an Asus Transformer Pad TF103C.


Written By: Tyler Ellis



 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)
- [Tweezers \(1\)](#)

Step 1 — Battery

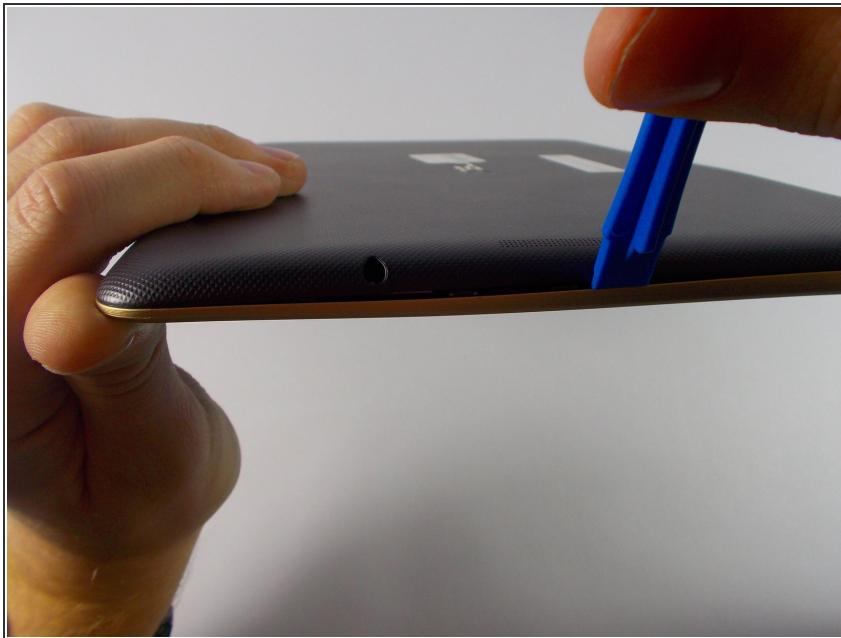


- Make sure power is off.
- Insert plastic opening tool on the side of the tablet.

i You can use a thin screwdriver if you don't have an opening tool.


- Gently pull upwards and carefully pry open the Transformer pad.

Step 2

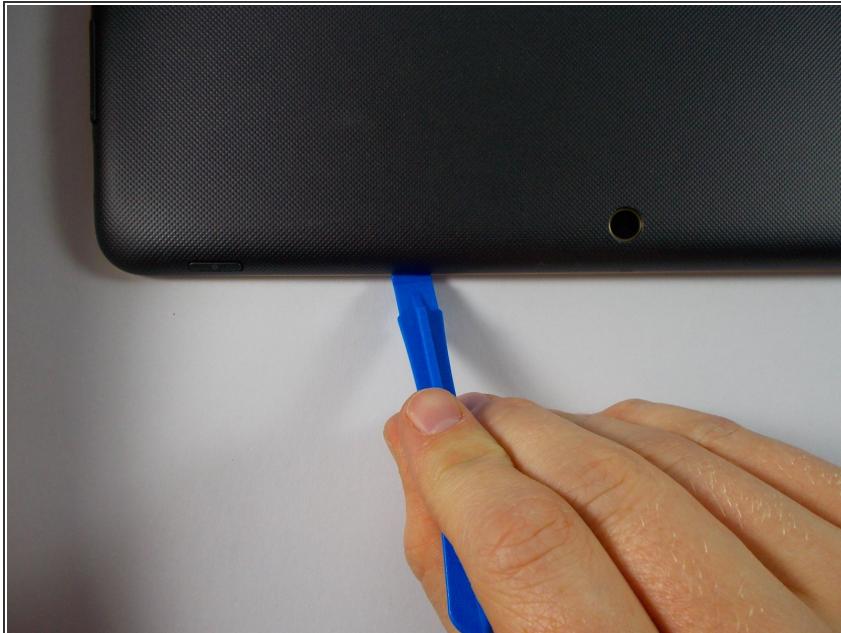


- Slide the tool along all four edges and continue to pull the tool upwards.

Step 3

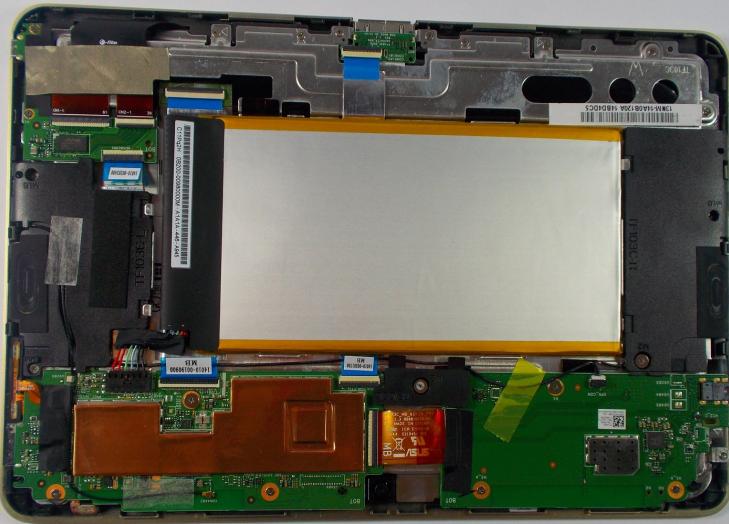


- Remove the back cover once it is detached and set it aside.
- Rotate tablet to match picture.

Step 4

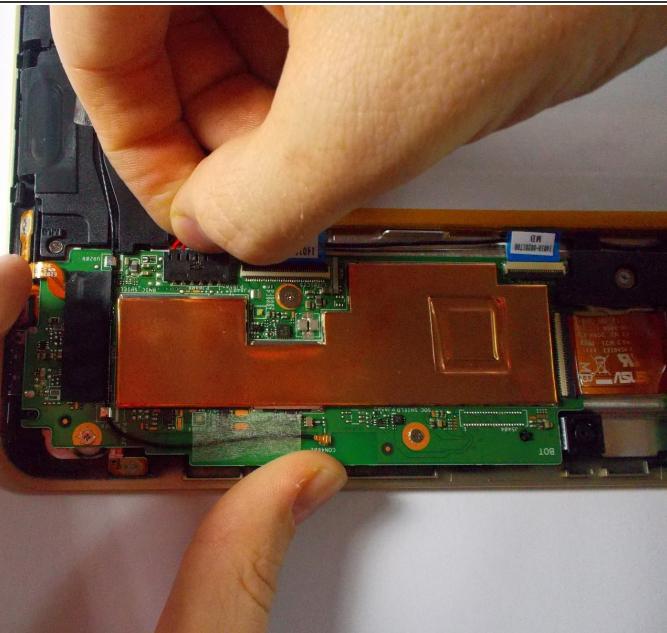


- Carefully unplug the battery cable from the motherboard.

Step 5

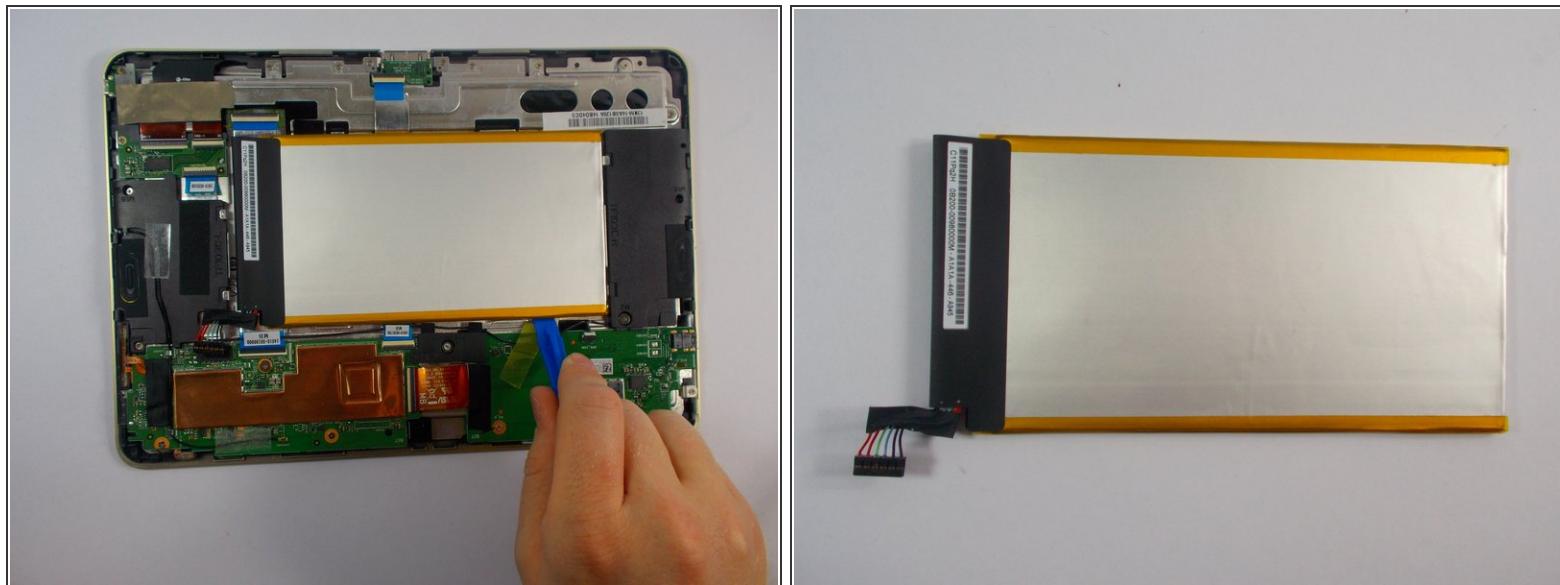


- Use plastic opening tool to carefully pry the battery out off of the frame.
- *i* Replace battery with a new +3.7V=19Wh Li-polymer Battery Pack C11P1328.

Step 6 — Rear Facing Camera

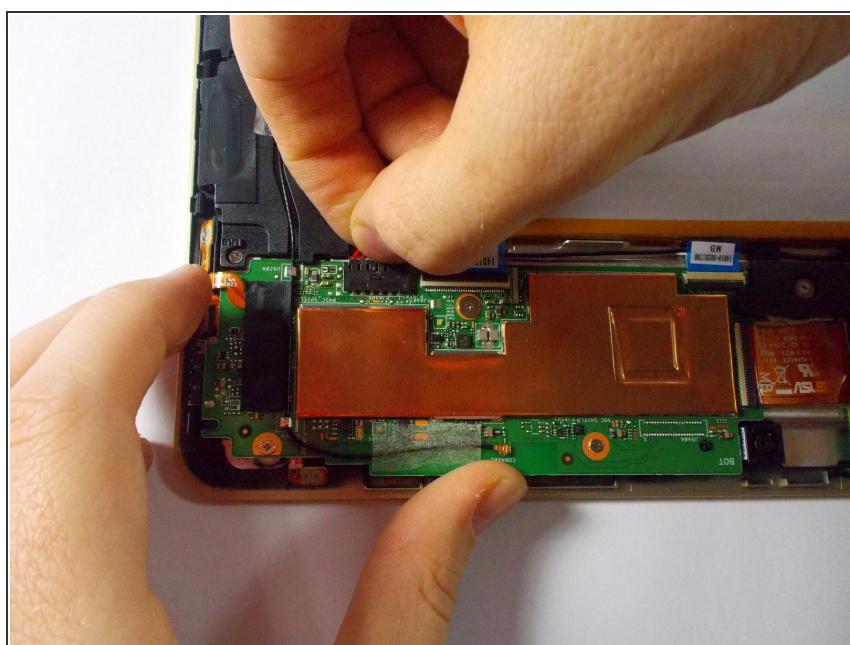


- Carefully unplug rainbow cable from motherboard.

Step 7

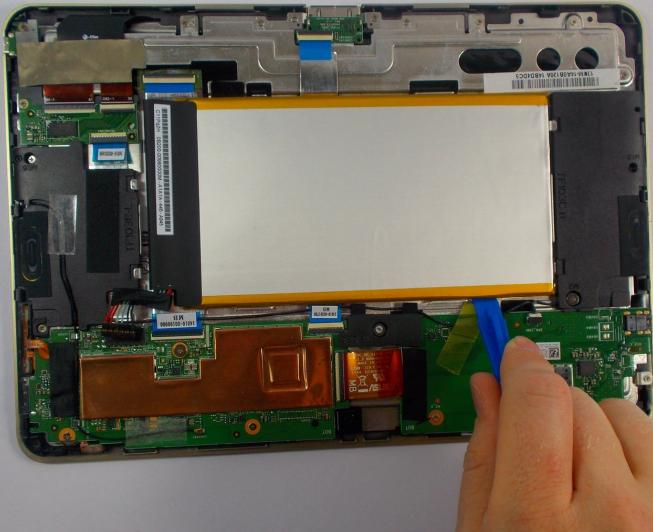

- Use plastic opening tool to carefully pry the battery out from frame.


Step 8

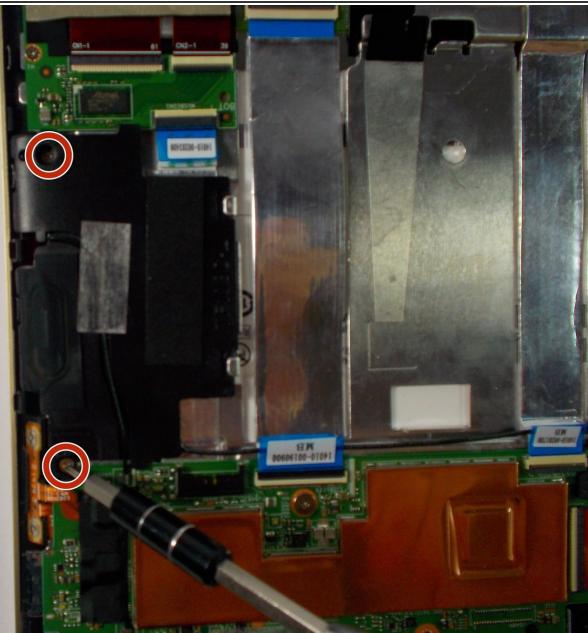

- Use the +J000 screwdriver to remove screws (2) from speakers.

📌 Keep the screws together and organized. (Label, if necessary).

Step 9

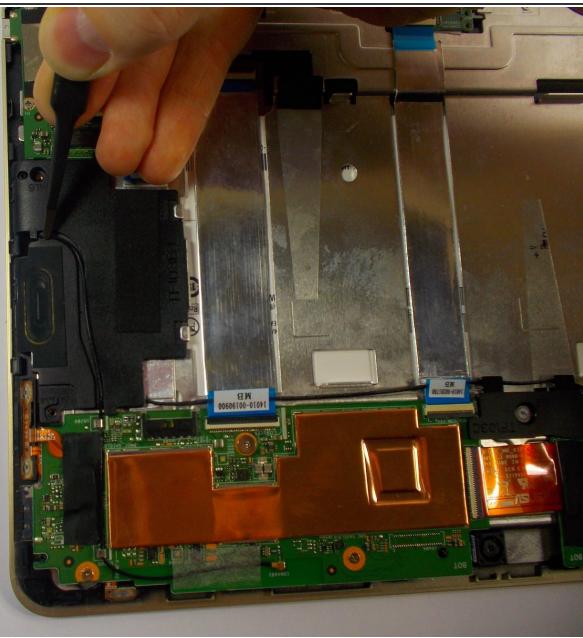


- Take ground wire out from the top of TF103C-L(Left) speaker.

 If you pull on the wire to much it will break off.


 If you break the wire off you can solder it back on

Step 10

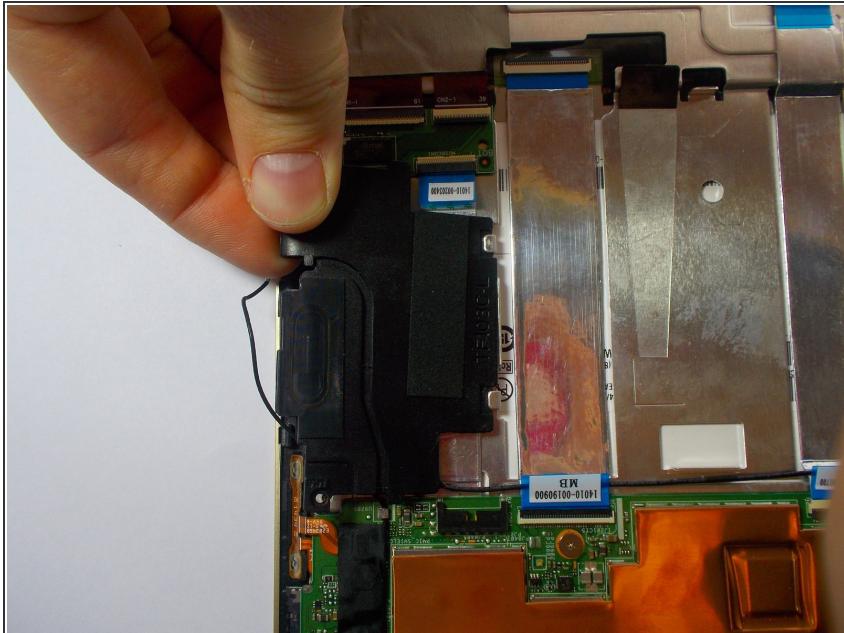


- Remove the Left speaker from the frame.

Step 11

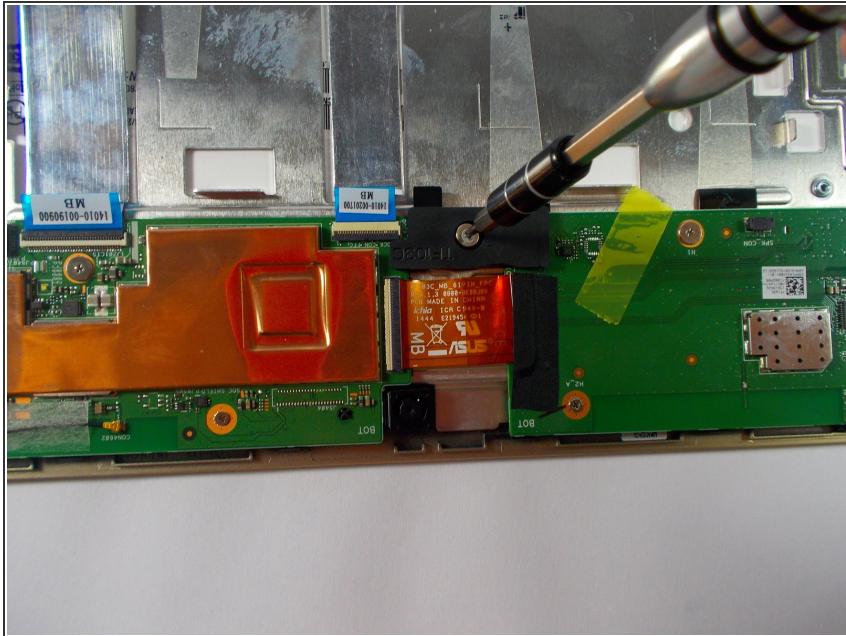


- Use the +J000 screwdriver to unscrew and remove the M2 plastic holder.

Step 12

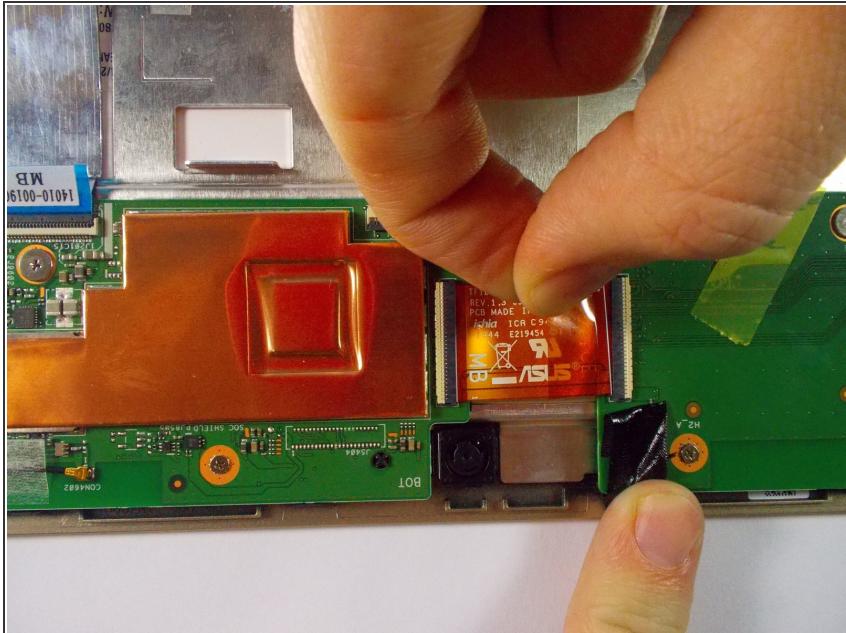


- Remove black tape from ribbon cable and separate the cable from the soundboard.

Step 13

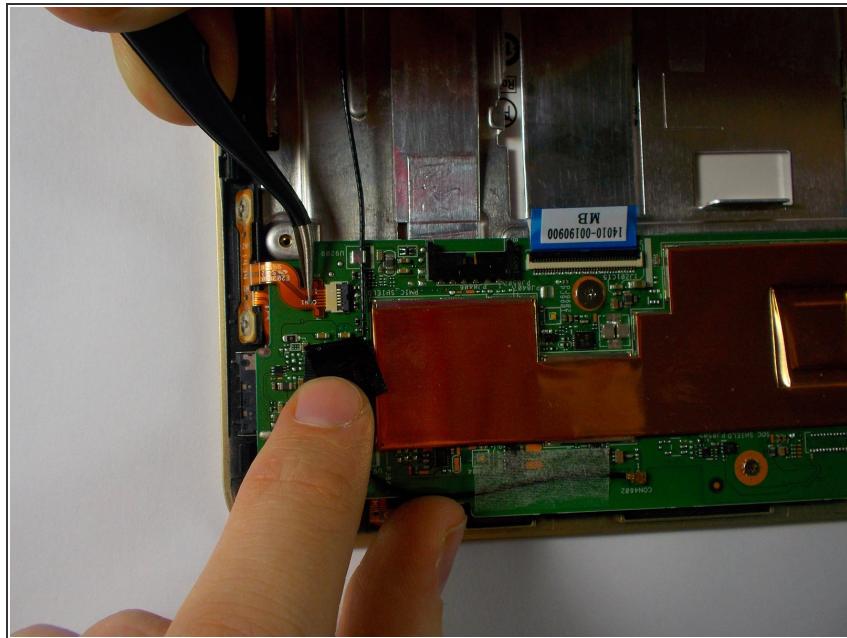


- Remove black tape.
- Unplug ribbon cable using small tweezers from volume and power button.

Step 14

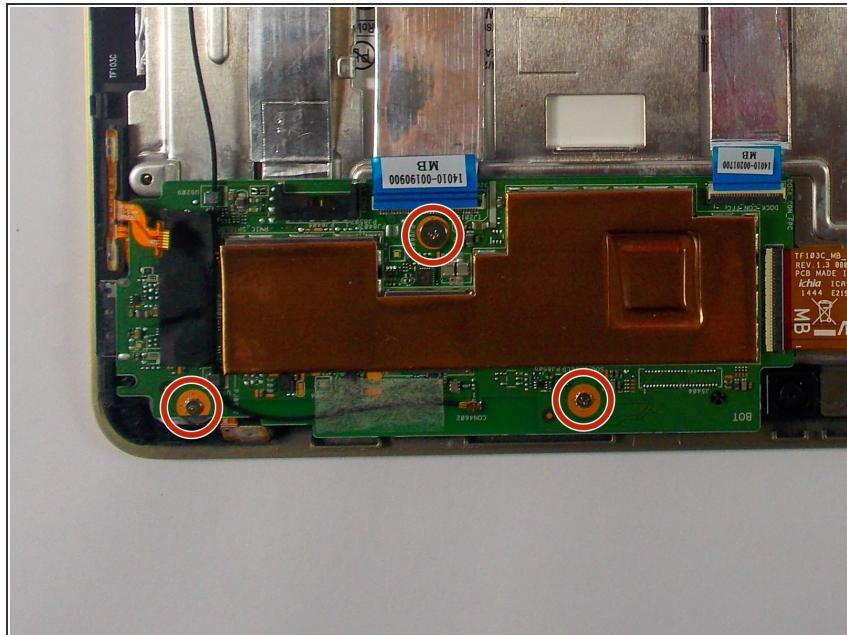


- Use the +J000 screwdriver to remove screws (3) from motherboard.

Step 15

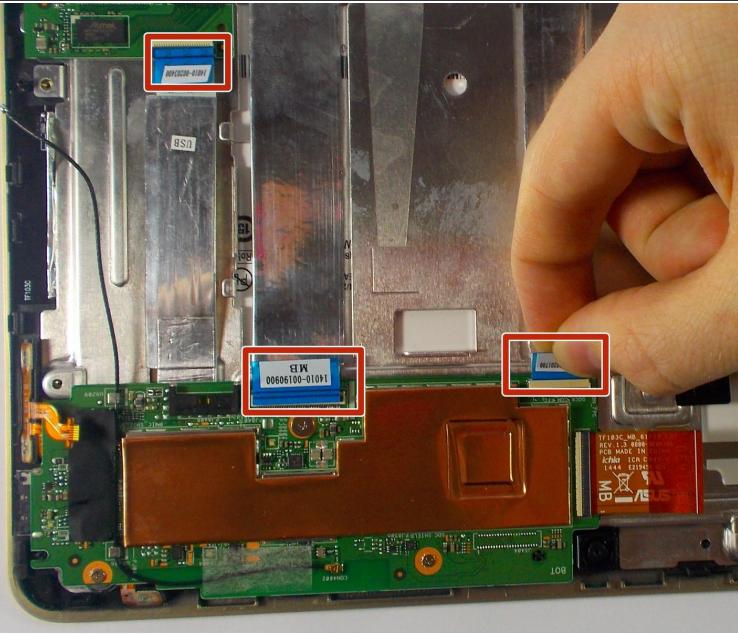


- Unplug all three ribbon cables.
- *(i)* Two from motherboard. One from USB charging port.

Step 16

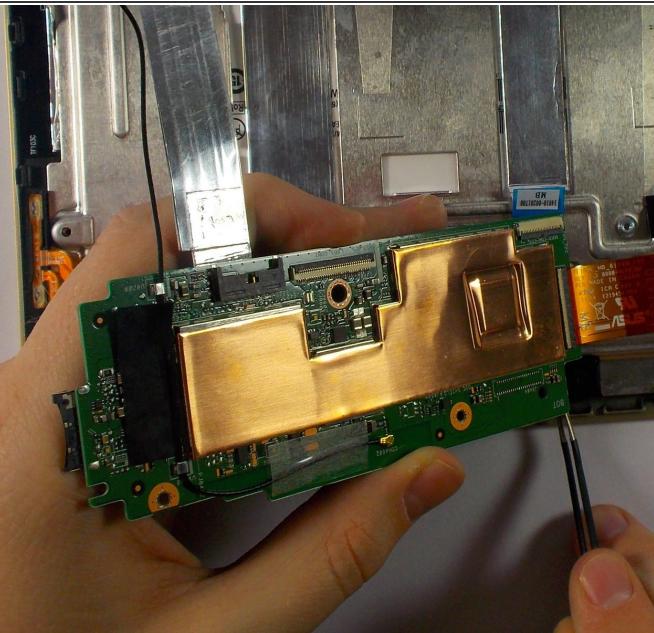

- Lift up the motherboard.
- Pull out ribbon cable from the underside of the motherboard then remove it.

Step 17

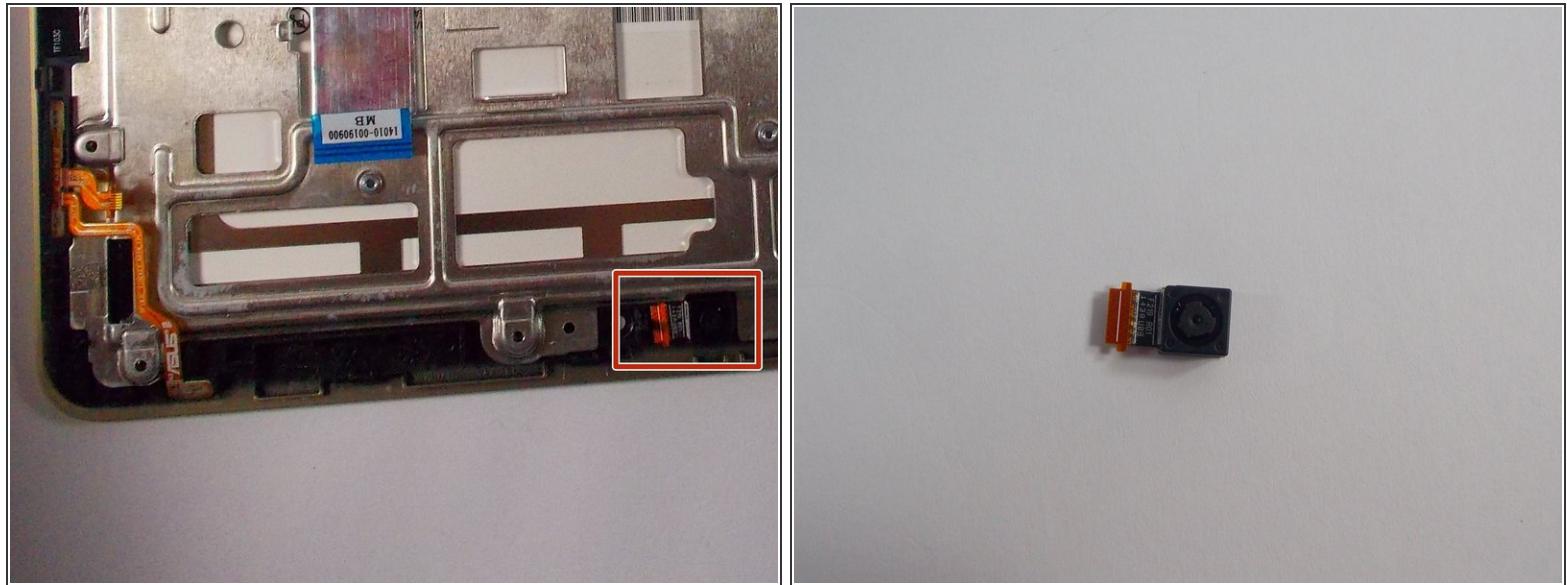

- Remove camera.

(i) The camera is glued down so it might take some strength to remove

To reassemble your device, attach the new camera to the motherboard then follow these instructions in reverse order.