



BRCK v1 Modem Replacement

With this guide, you will be able to remove the modem in your device and replace it with a new one. This will help fix any connection problems with your device.

Written By: Jeret Buerger



INTRODUCTION

Using a hex 2.0 driver, you will take off the top cover in order to access the modem. With a pair of tweezers you will be able to remove and replace the modem.

TOOLS:

- [Tweezers \(1\)](#)
- [2 mm Hex Screwdriver \(1\)](#)

Step 1 — Top Cover



- Place the face of the device showing BRCK face up.

Step 2



- Remove the four screws(4mm hex head) on the corners of the device with a Hex 2.0 Screwdriver.

Step 3



- Remove the top cover.

Step 4 — Modem



- Cut the black zip tie holding the modem down.

 **Caution** By cutting the zip tie, you void any manufacturer warranty you may have on the device.

Step 5



- Remove the connection located on the edge of the modem.

Step 6



- Slightly lift the modem to reveal the brown ribbon connector and metal connection plate, located on the bottom of the modem.


Step 7



- Using your tweezers, gently push on the metal plate and slide it down toward the base of the modem to release the locking mechanism.
- Lower the plate and gently pull the ribbon out of the face plate.

⚠ Caution Be extremely gentle while performing this step. The ribbon is brittle and prone to breaking if bent too much. Make sure you go slowly so that you do not damage the device.

Step 8

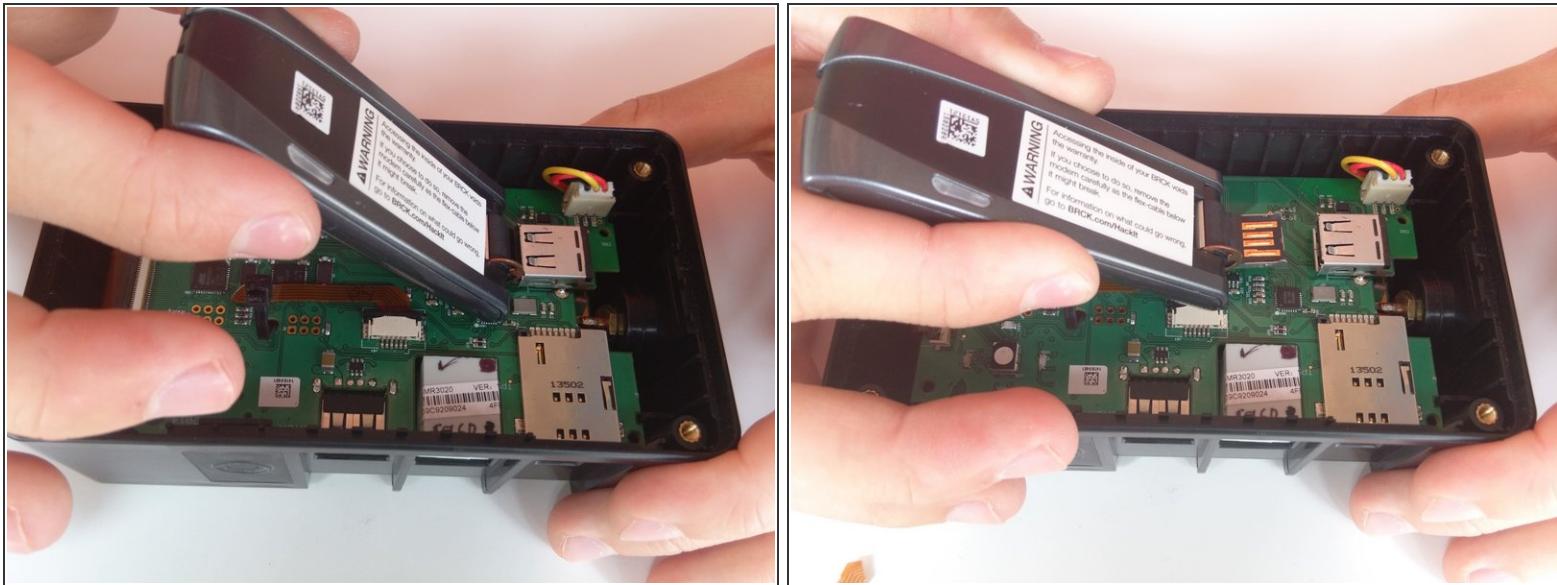

- Remove the modem from the device.

To reassemble your device, follow these instructions in reverse order.

This document was generated on 2019-09-26 03:29:13 PM (MST).

