




# Canon PowerShot SD1400 IS Motherboard Replacement

Replace damaged motherboard of Canon PowerShot SD1400 IS by following the steps in this guide.

Written By: Faris Rezwan

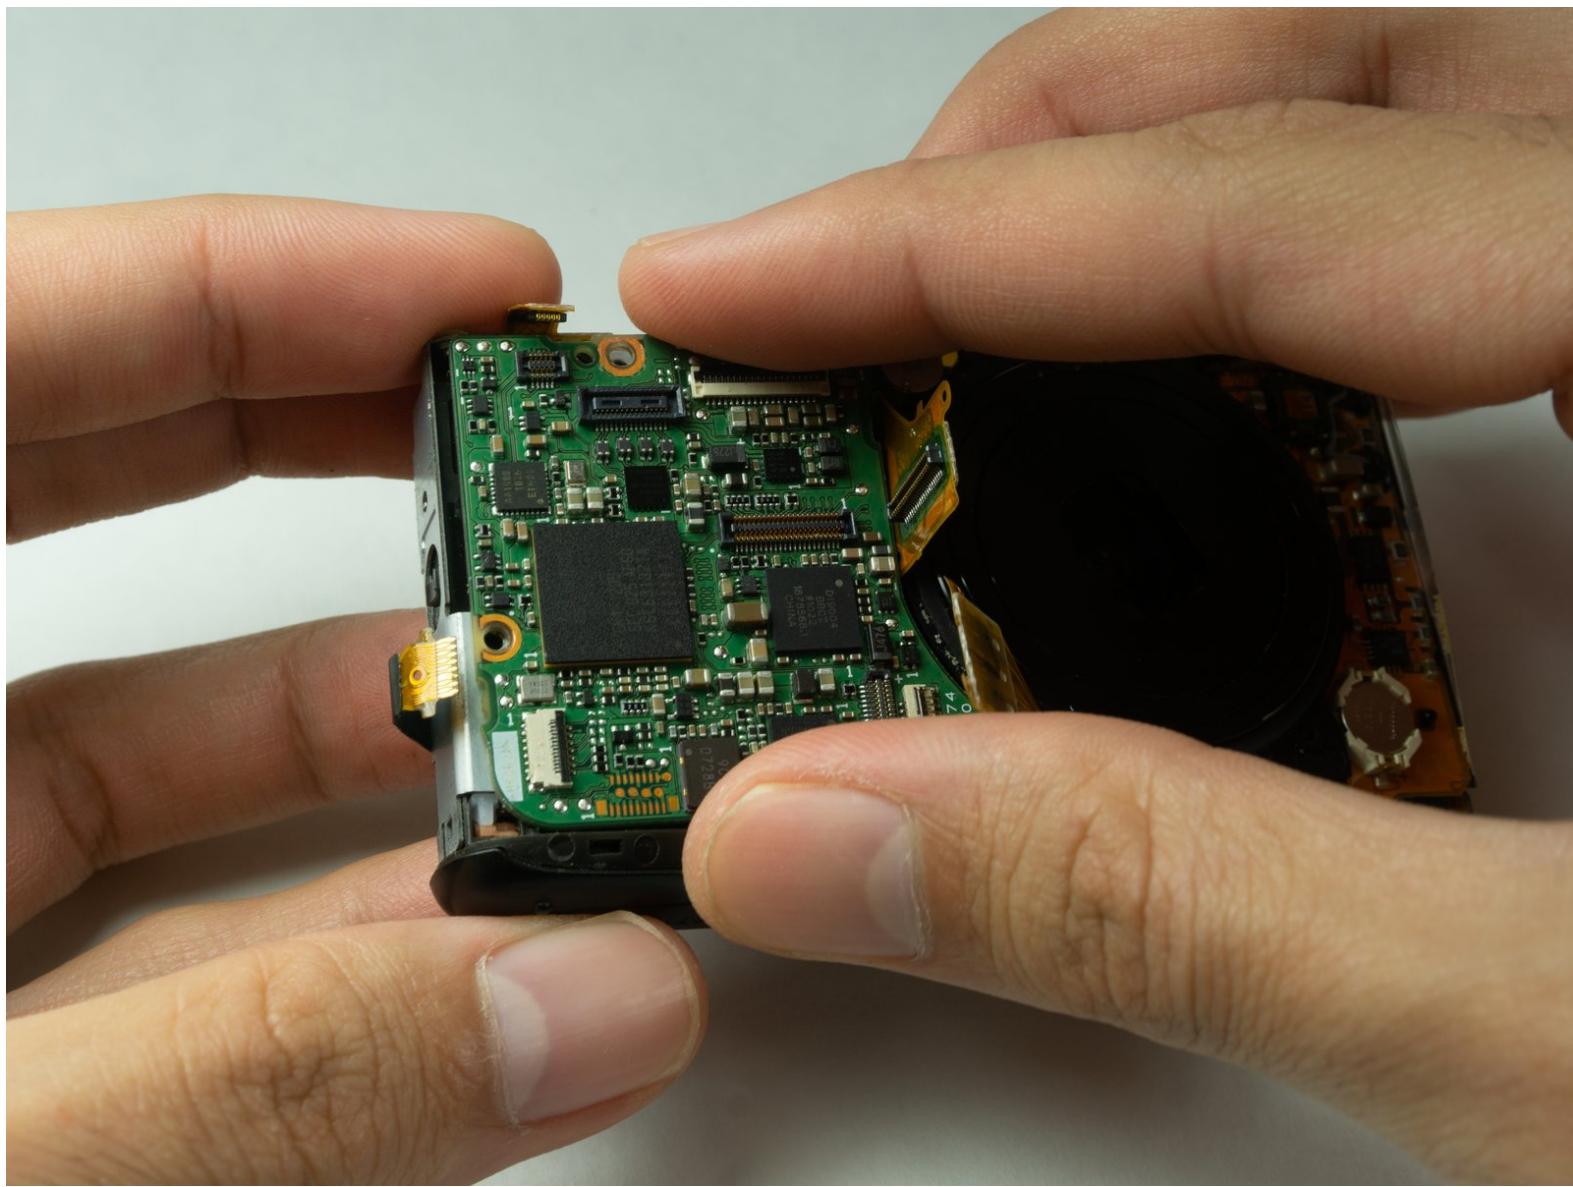

This document was generated on 2019-10-29 12:50:52 AM (MST).

## INTRODUCTION

The motherboard can be damaged because of overheat and a short circuit which can cause the camera to stop working. This guide will show how to replace the motherboard in the device.

### TOOLS:

- [Tweezers \(1\)](#)
- [iFixit Opening Tools \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)
- [Phillips #000 Screwdriver \(1\)](#)

### PARTS:

- [Canon PowerShot SD1400 IS Motherboard \(1\)](#)

## Step 1 — Motherboard



- Remove two 2mm Phillips #00 screws on both sides of the camera.

## Step 2



- Remove the 4mm Phillips #000 screw from the bottom.

## Step 3



- Remove the front face panel of the camera.

## Step 4



- Remove the rear panel of the camera by using hand with firm pressure.


*(i)* The user interface panel, side and bottom panel of the camera may fall down by itself while you are taking the rear panel of the camera.

## Step 5




- Remove the 3mm Phillips #000 screw from the top of the camera.

## Step 6

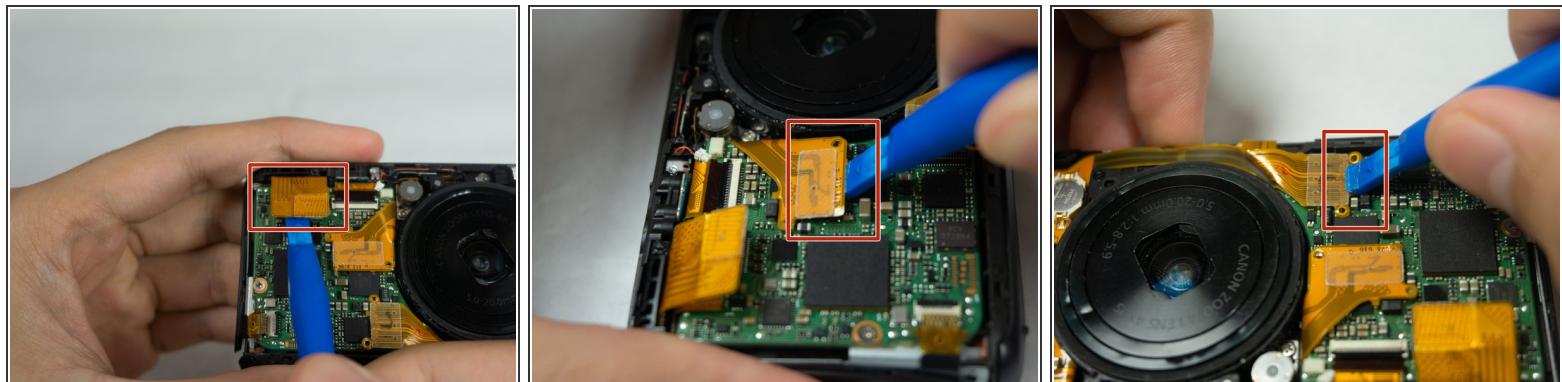


- Pry the three golden ribbons off the motherboard using a plastic opening tool.

## Step 7

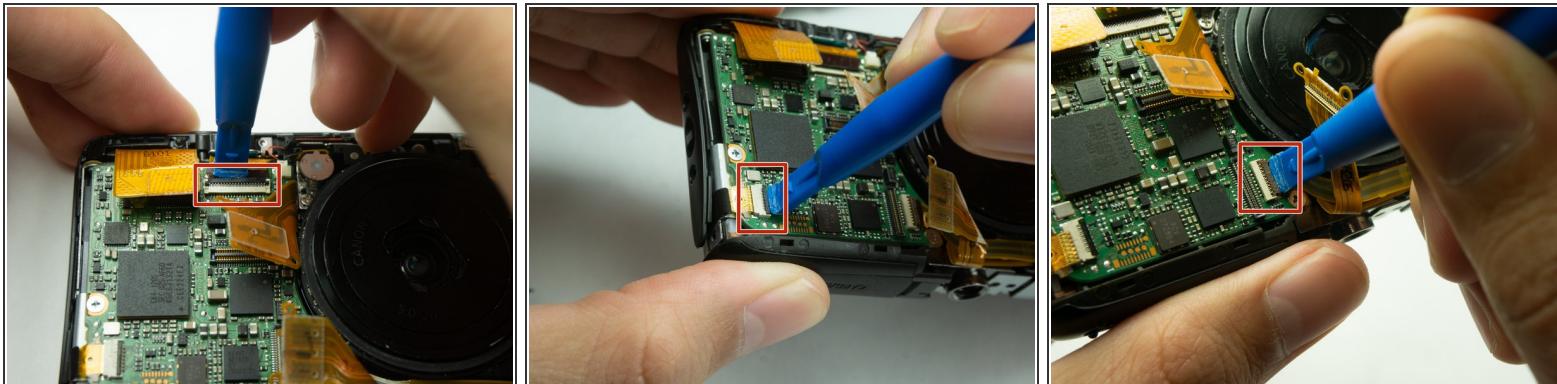


- Use a plastic opening tool to flip up the retaining flap on the ribbon cable [ZIF](#) socket.
- Once released, the small black tab will point straight away from the front face of the camera and the golden film will no longer be attached to the motherboard.

## Step 8

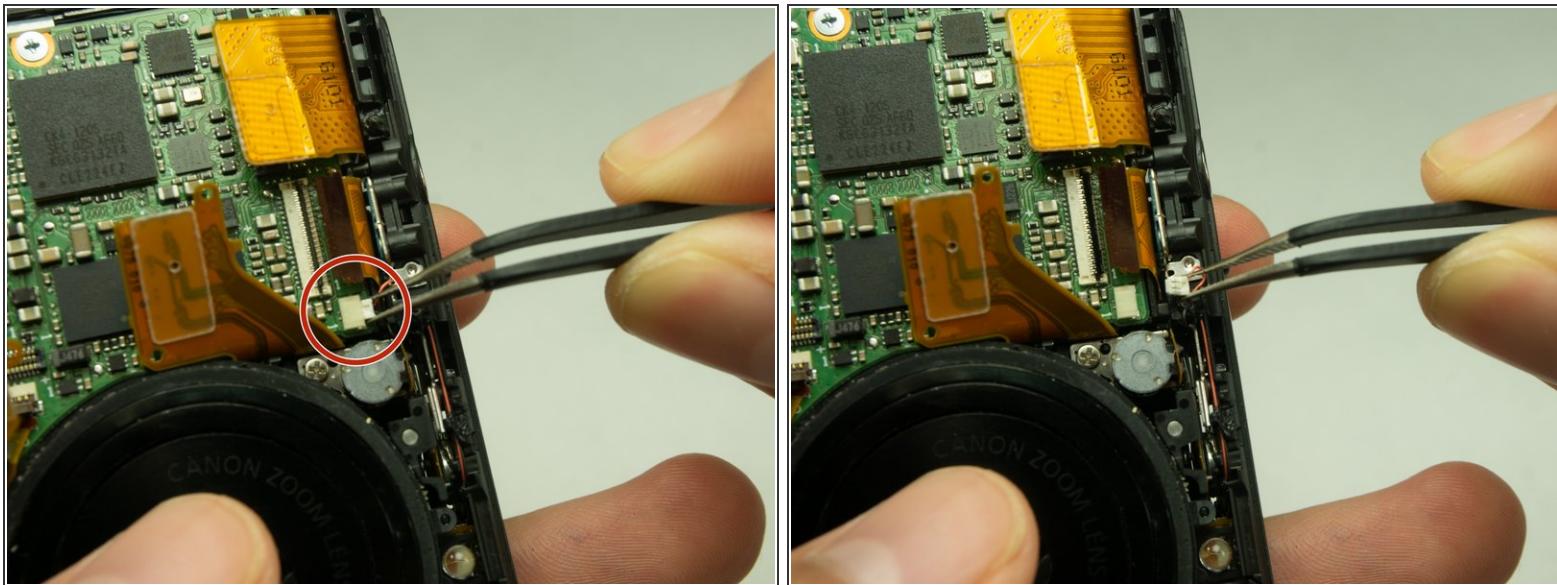


- Unplug the small chip from the face of the camera using a pair of tweezers.

## Step 9

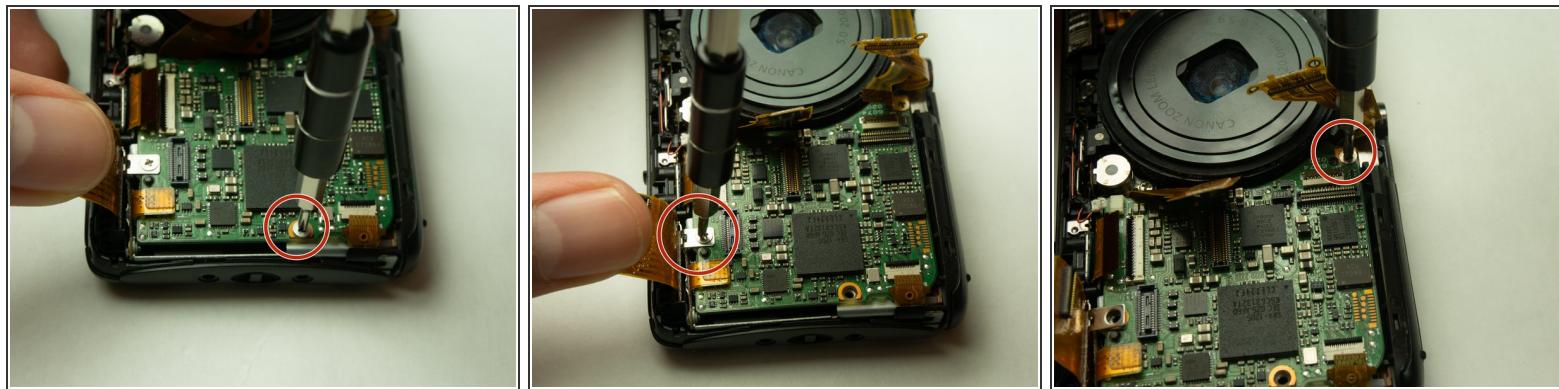


- Remove the three 3mm Phillips #000 screws from the motherboard.

## Step 10

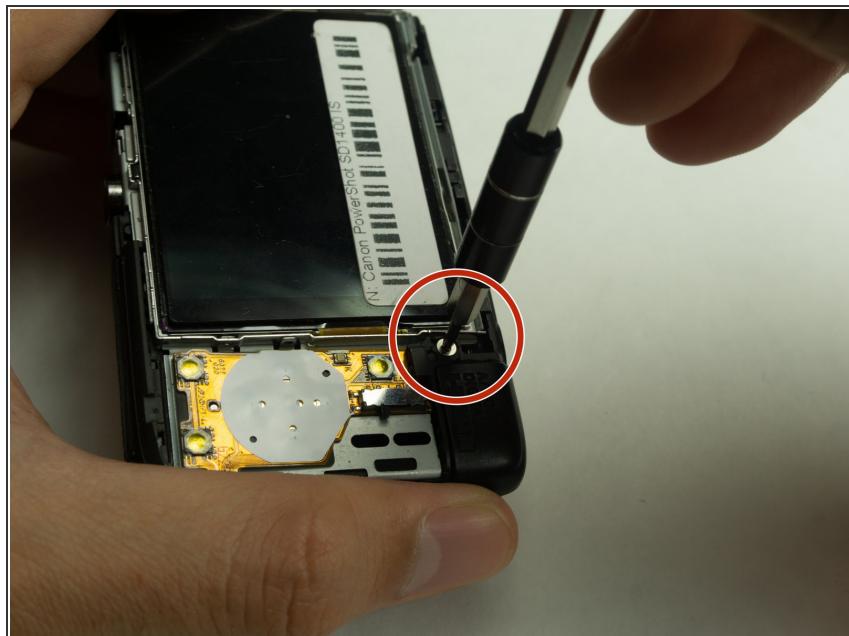



- Remove the 3mm Phillips #000 screw from the rear face of the camera.

## Step 11

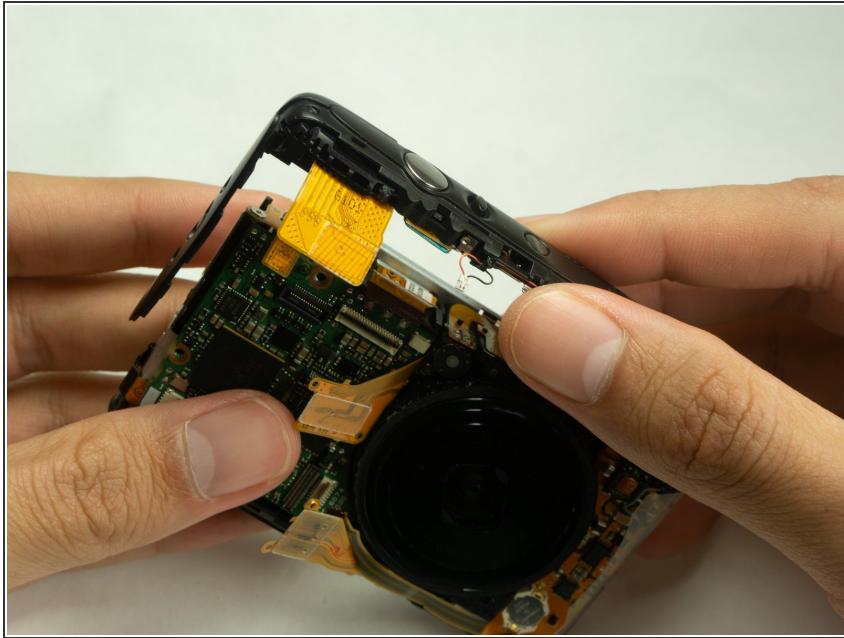

- Remove the top panel from the camera.

## Step 12

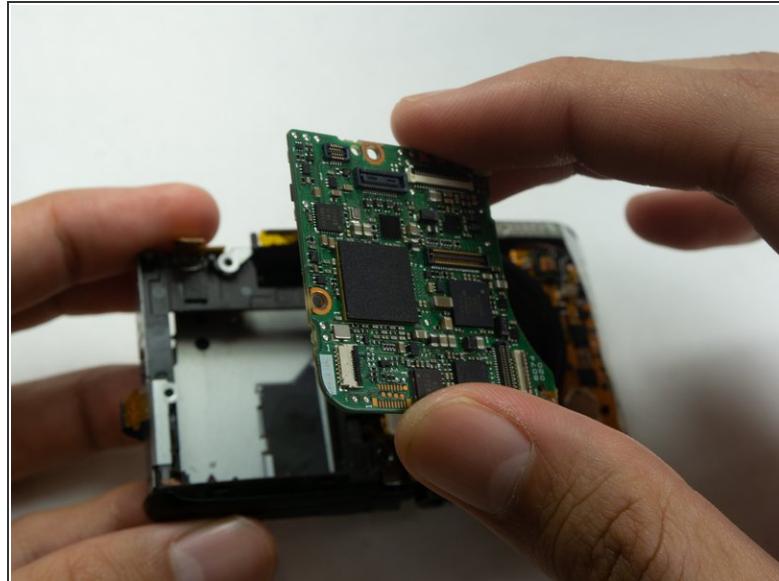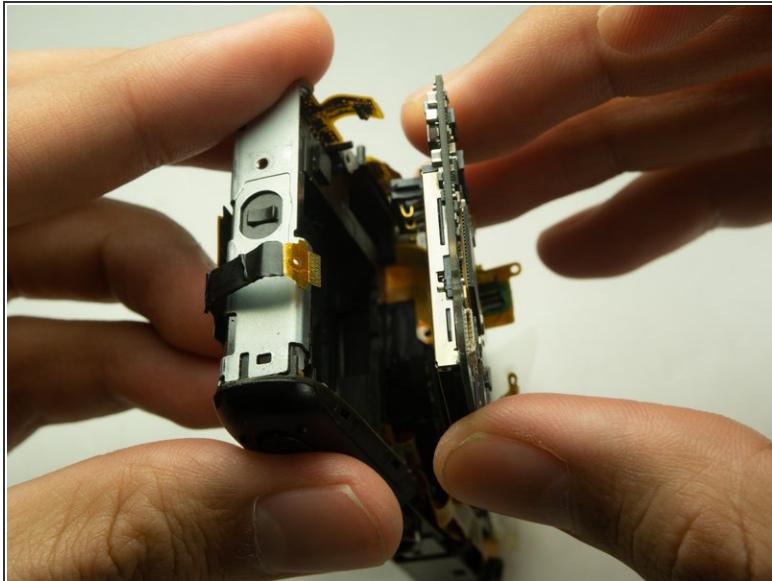

- Remove the motherboard.

To reassemble your device, follow these instructions in reverse order.