




Cirago M9030 Button Module Replacement

This guide shows how to install the button module.

Written By: Ryan Sutardji

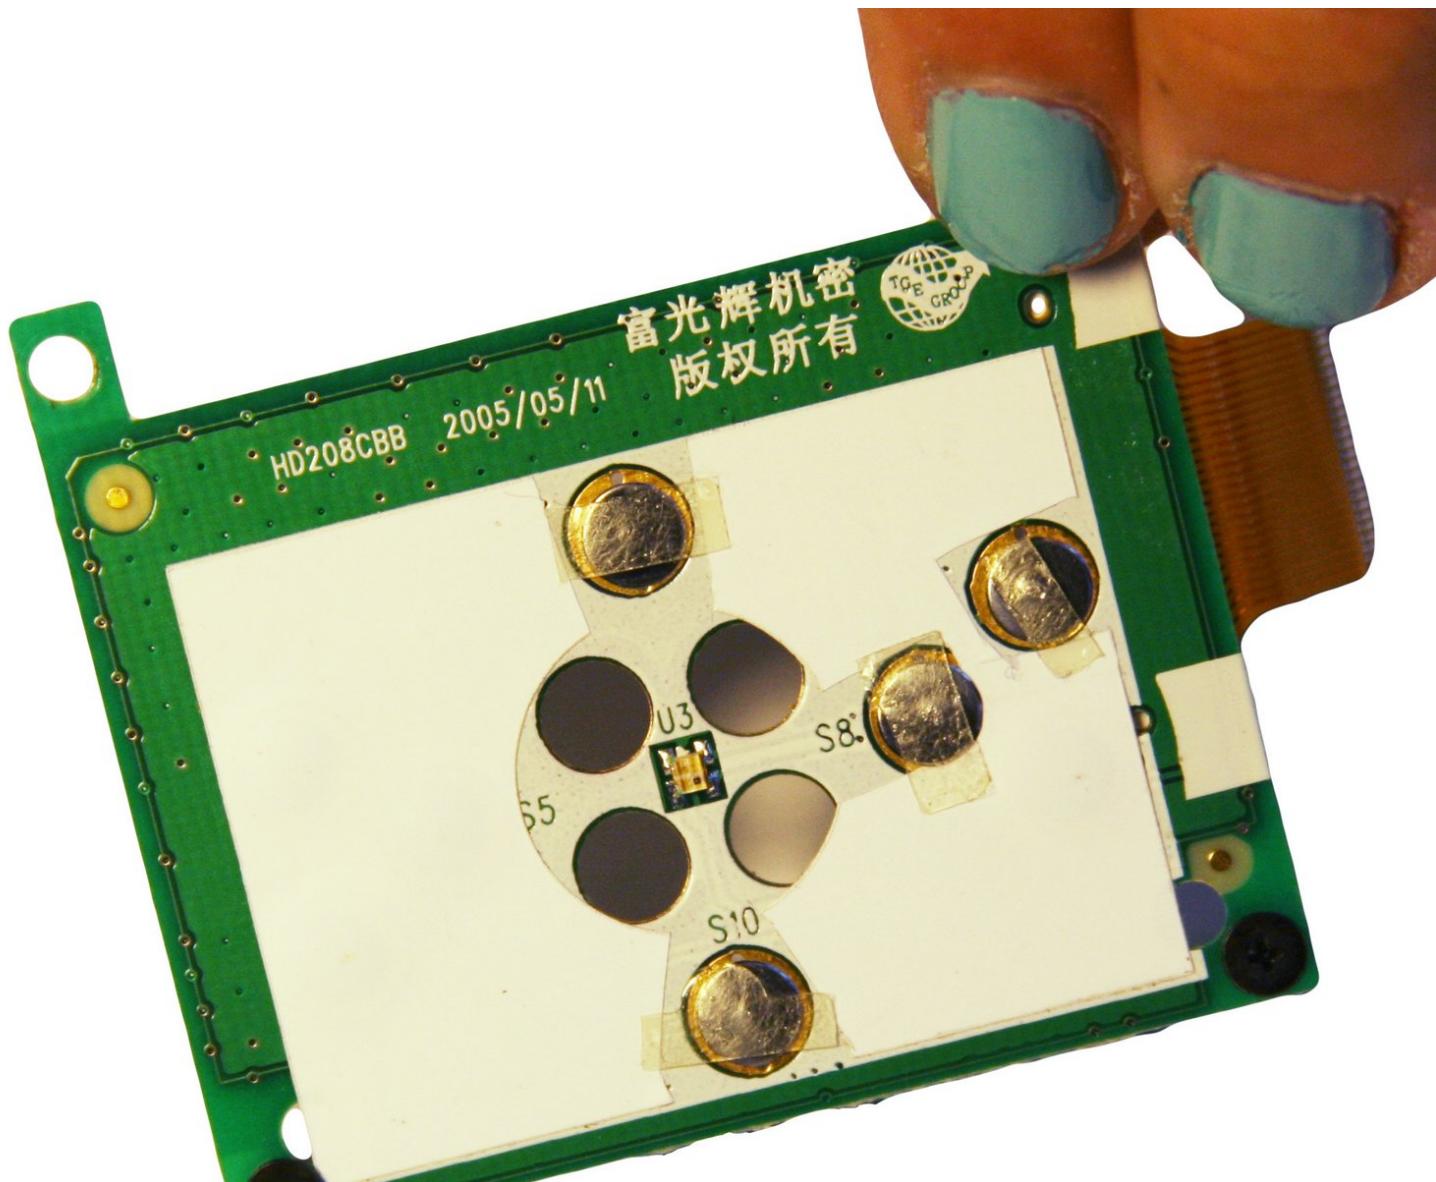

 **TOOLS:**

- [iFixit Opening Tools \(1\)](#)
- [Tweezers \(1\)](#)
- [Phillips #00 Screwdriver \(1\)](#)

Step 1 — Cover



- Using a Phillips #00 screwdriver, remove the four 1.1mm long screws from the top side.

Step 2



- Using a Phillips #00 screwdriver, remove the four 1.1mm long screws from the bottom side.

i Remove the warranty sticker across the bottom.

Step 3




- Gently lift off the back and front casing.
- *i* The outer shell should easily come apart.

Step 4 — Hard Drive




- Make sure the device screen is face down.

Step 5

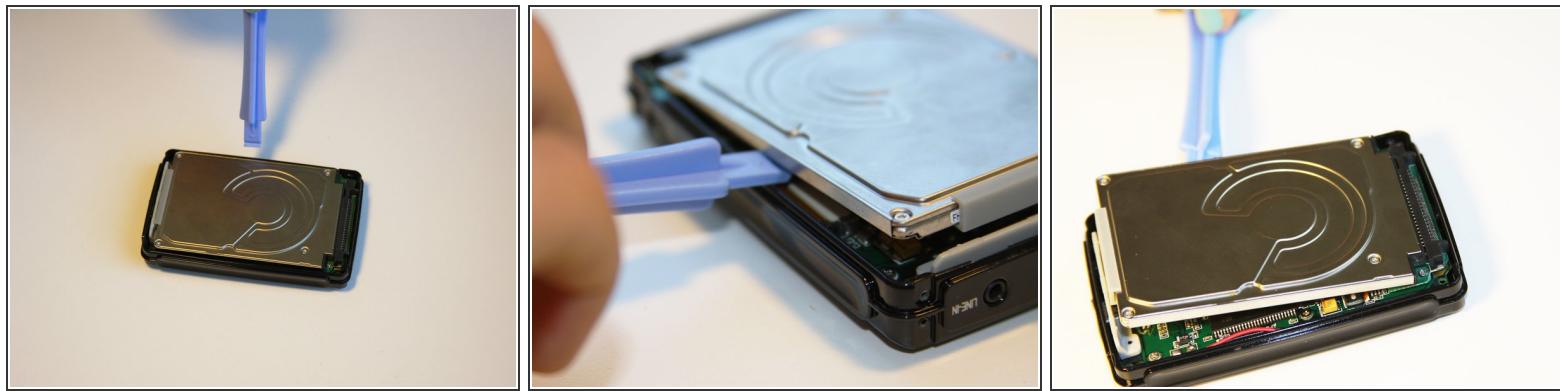


- Using the plastic opening tool, wedge the tool underneath the bottom left edge of the hard drive.
- Raise the bottom edge of the hard drive 15 degrees up from the device.

Step 6

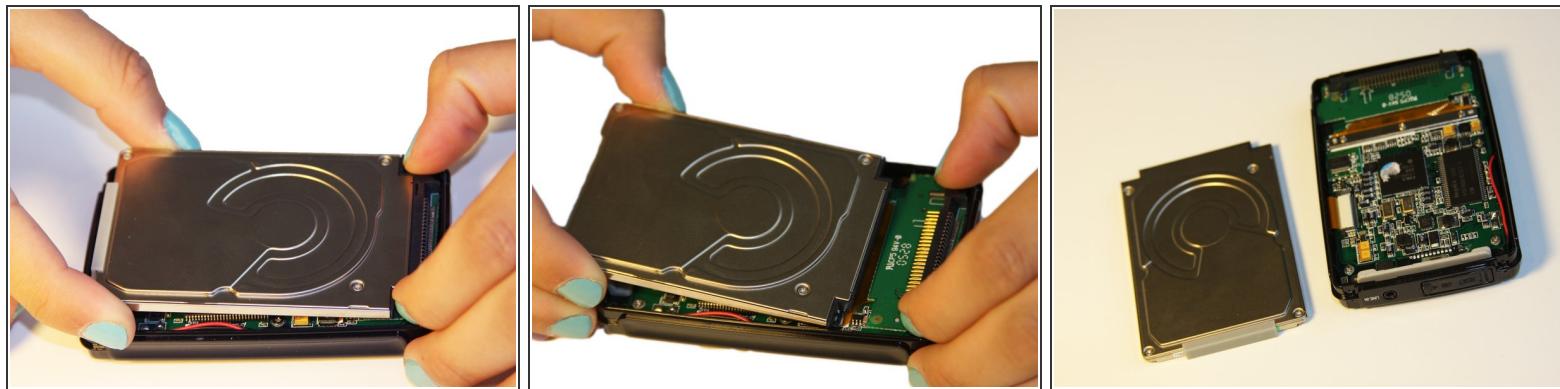

- Place fingers on the IDE connectors and gently slide the hard drive out from the IDE module.

Step 7 — IDE Connector

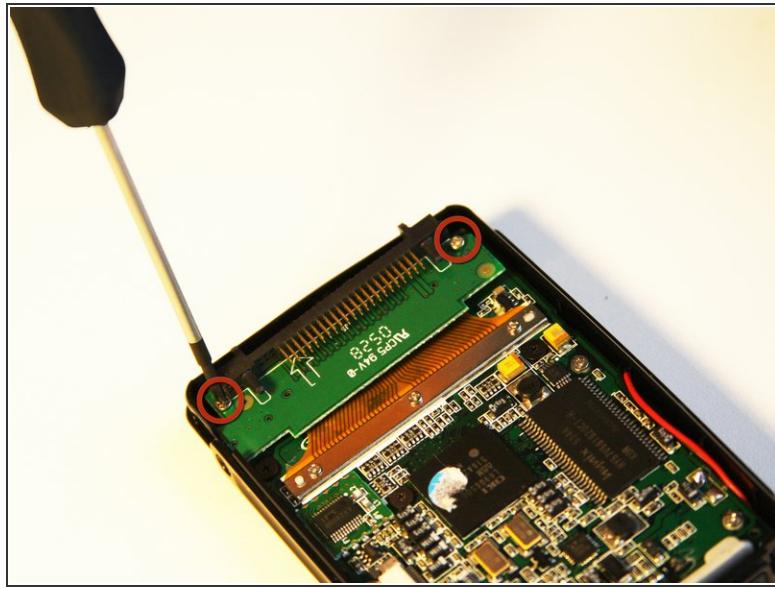


- Using the Phillips #00 screwdriver, unscrew the two 1.5mm long screws holding the IDE connector to the motherboard.

Step 8




- Using the Phillips #00 screwdriver, unscrew the three 1.5mm long screws on the metal bracket.

Step 9

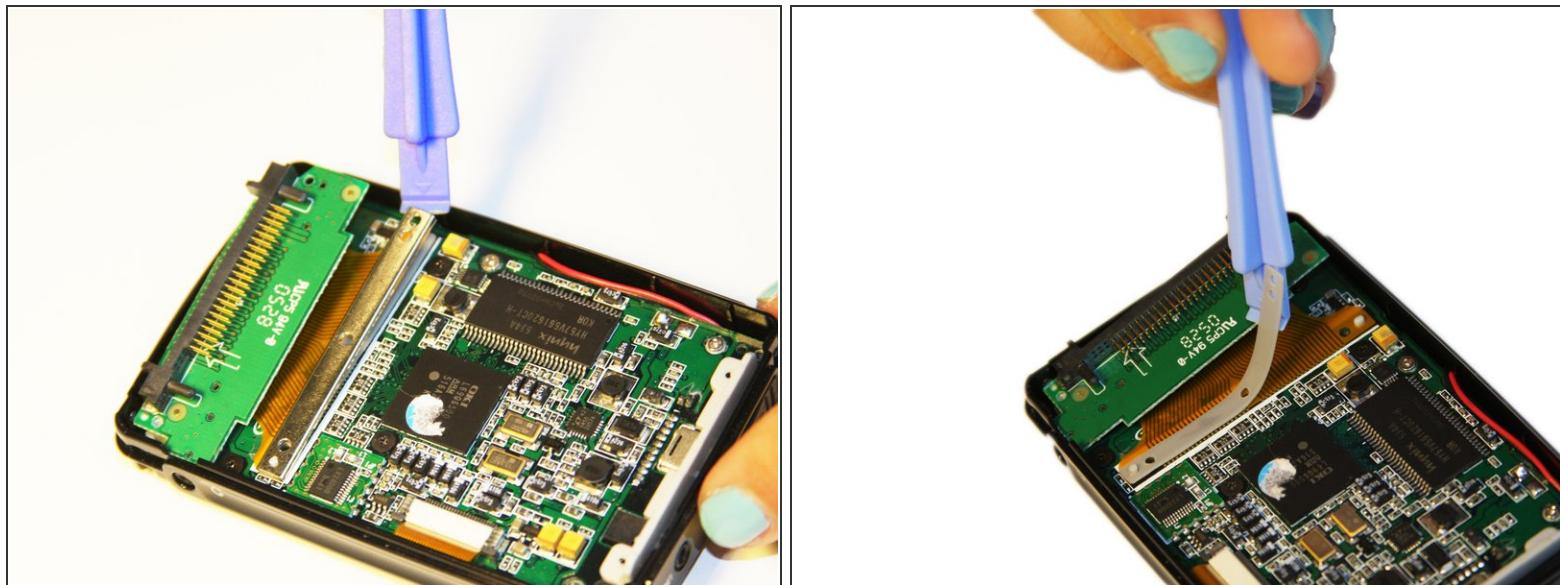


- Using the plastic opening tool, completely lift the metal bracket off of the motherboard.
- Using the plastic opening tool, completely lift the rubber insulator off of the motherboard.

Step 10

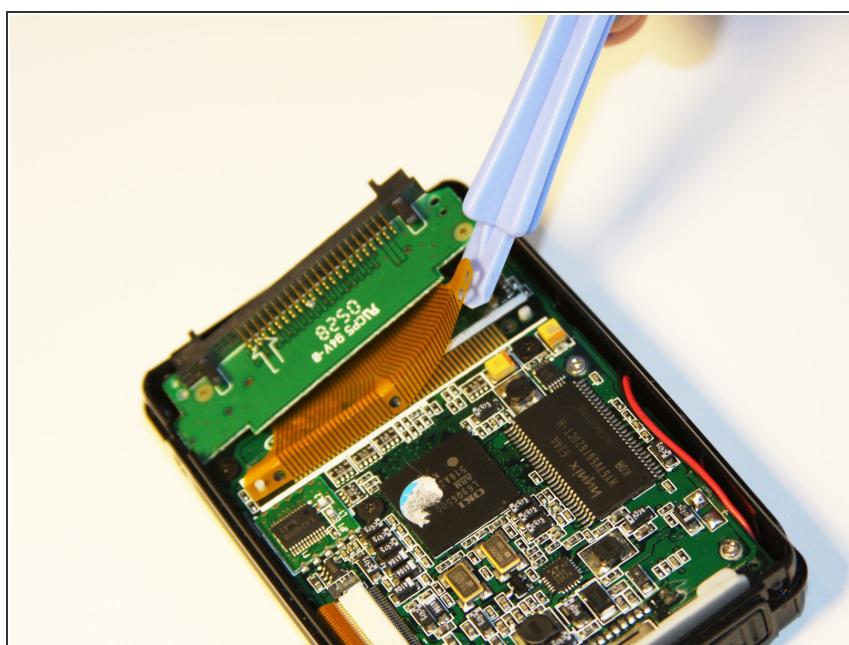

- Using the plastic opening tool, completely lift the ribbon off of the motherboard.


Step 11

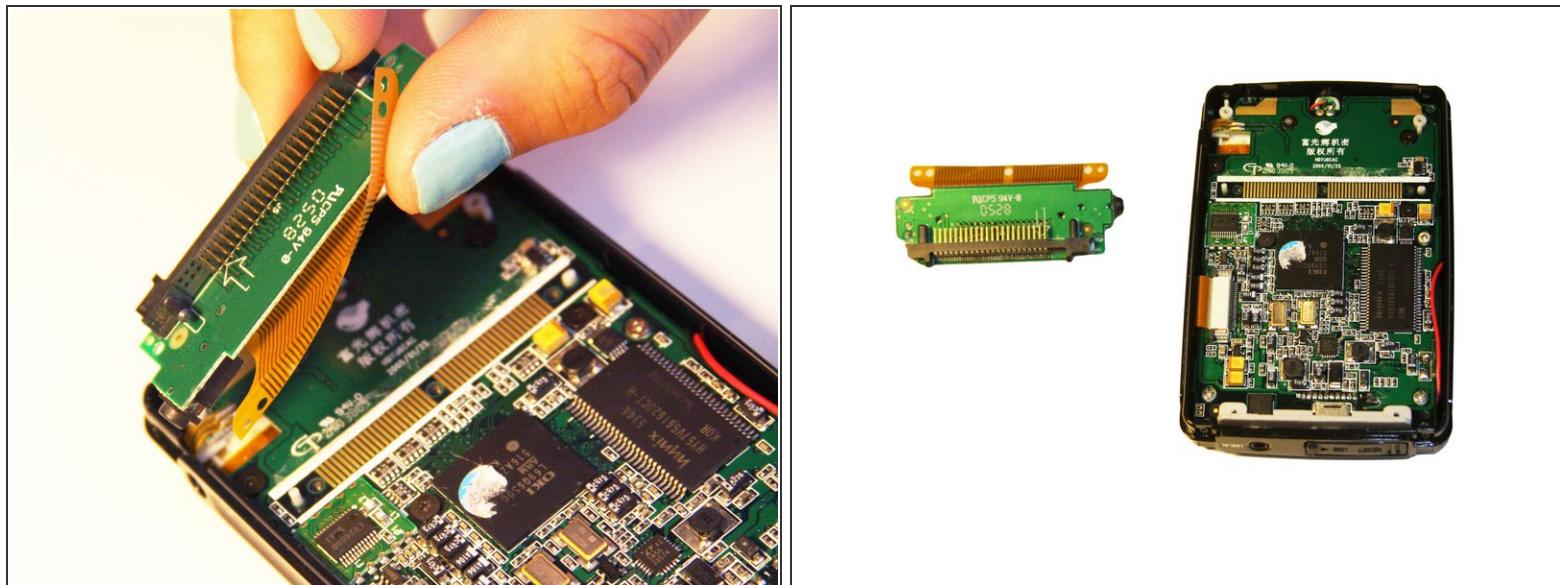

- Completely remove the IDE connector from the device.

⚠ The audio jack is attached to the IDE connector. Pull at a 45 degree angle from the audio jack.


Step 12 — Motherboard

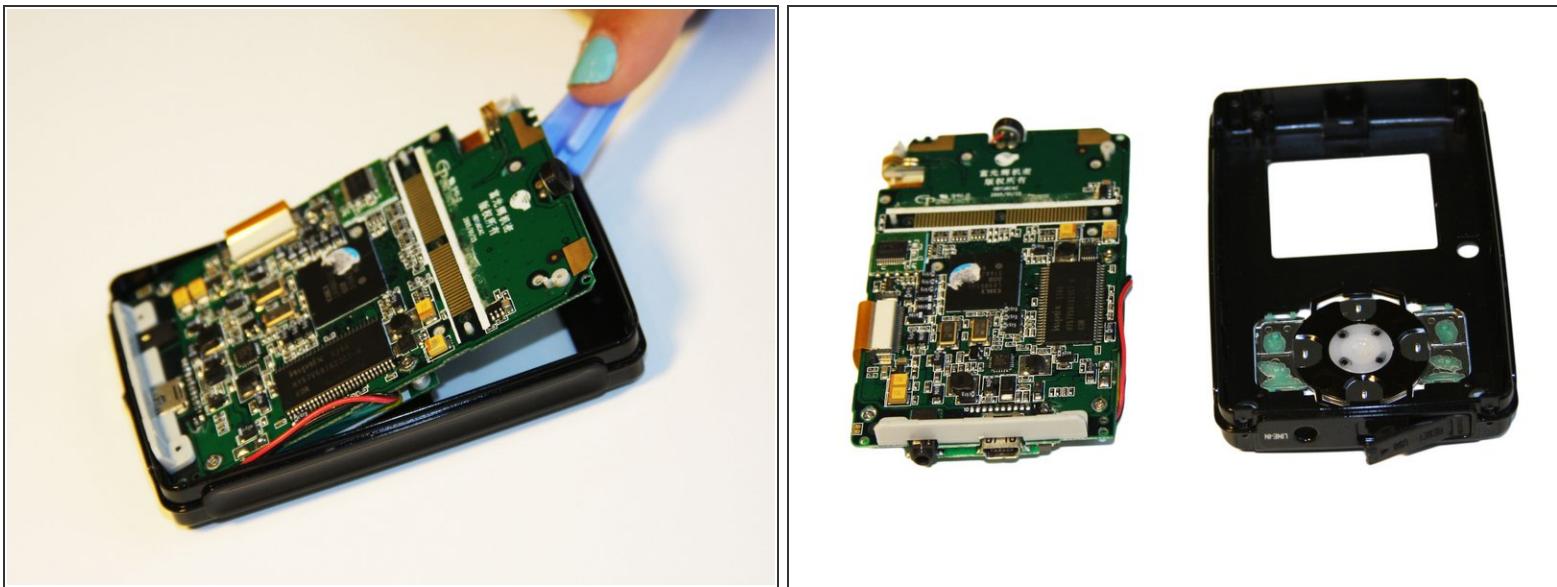

- Using the plastic opening tool, wedge the tool underneath the top edge of the motherboard.
- Completely remove the motherboard.


(i) The motherboard should slide out easily.

Step 13 — Button Module

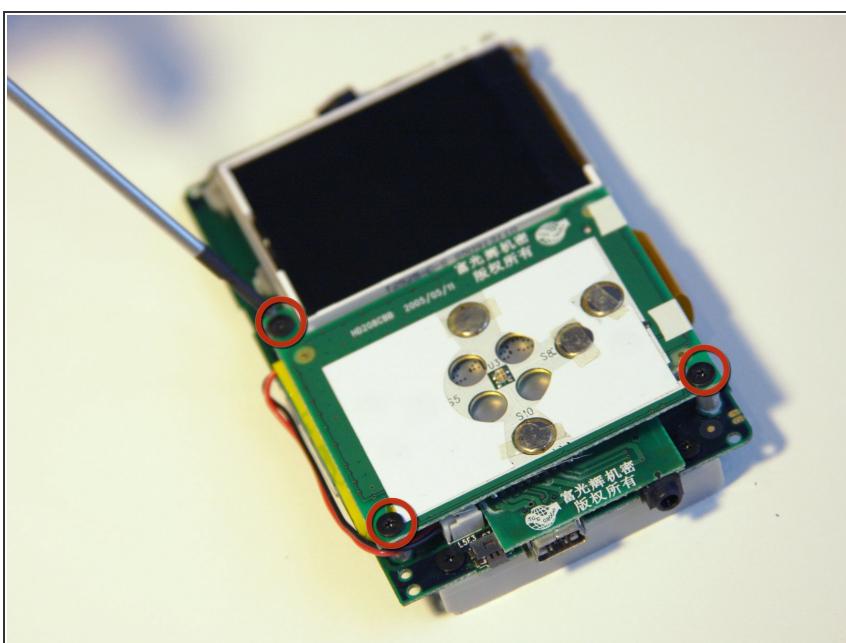


- Set aside the front cover.
- Flip over the motherboard.
- Using the Philips #00 screwdriver, remove the three 4mm long screws holding down the button module.

Step 14

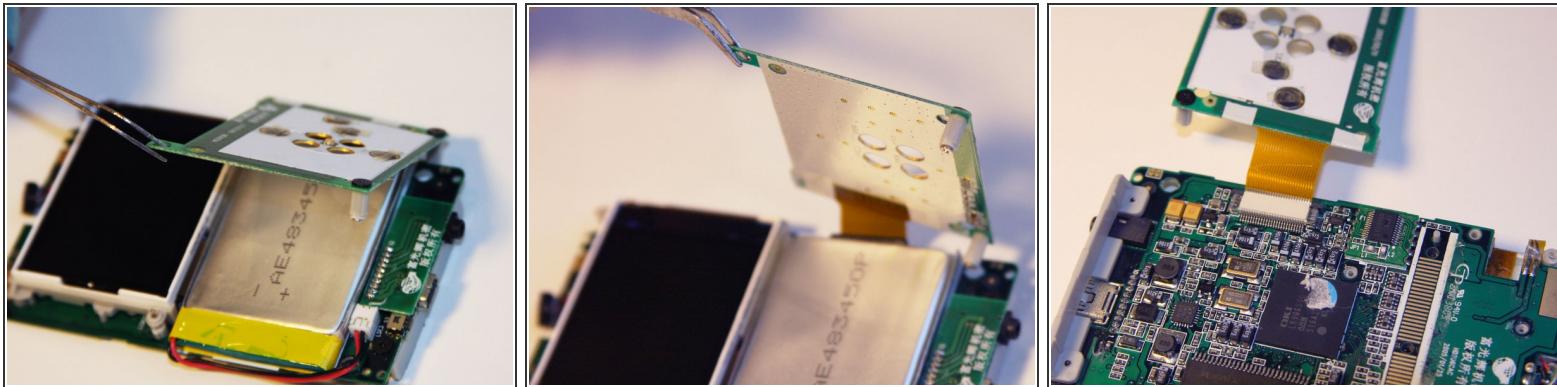

- Using the tweezers, lift up the button module to a 180 degree angle.
- ⚠ Leave the button module attached by the ribbon.
- Flip over the motherboard with the button module still attached.



Step 15

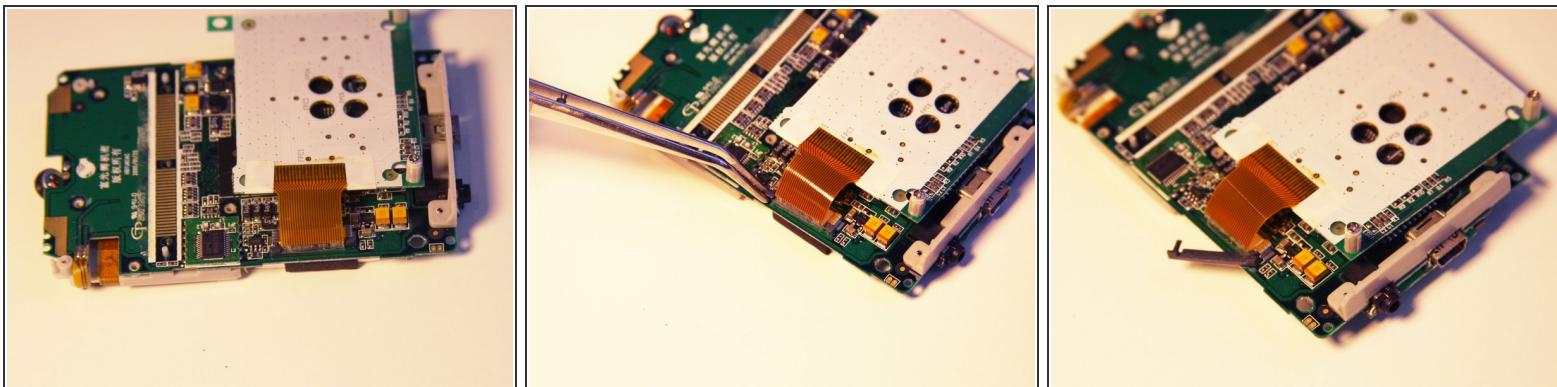

- Fold the button module over the motherboard.
- Using the tweezers, remove the ribbon pin.

ⓘ The ribbon pin should snap completely off of the motherboard.

Step 16

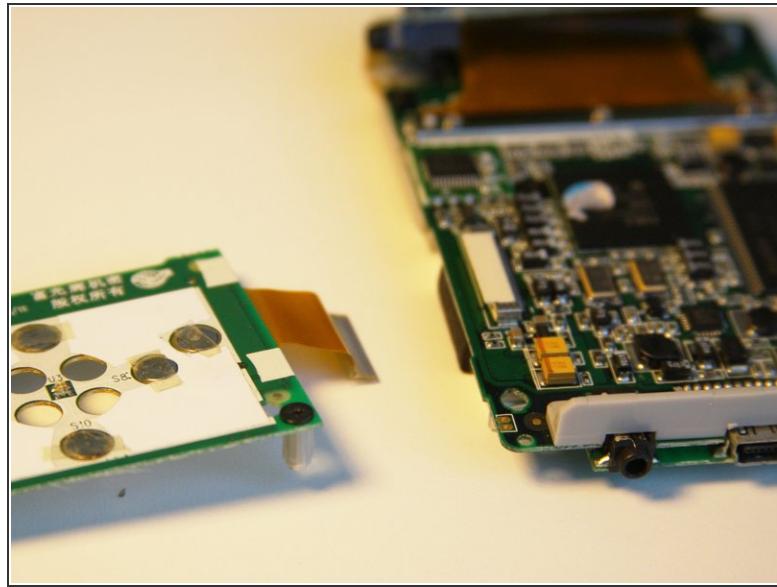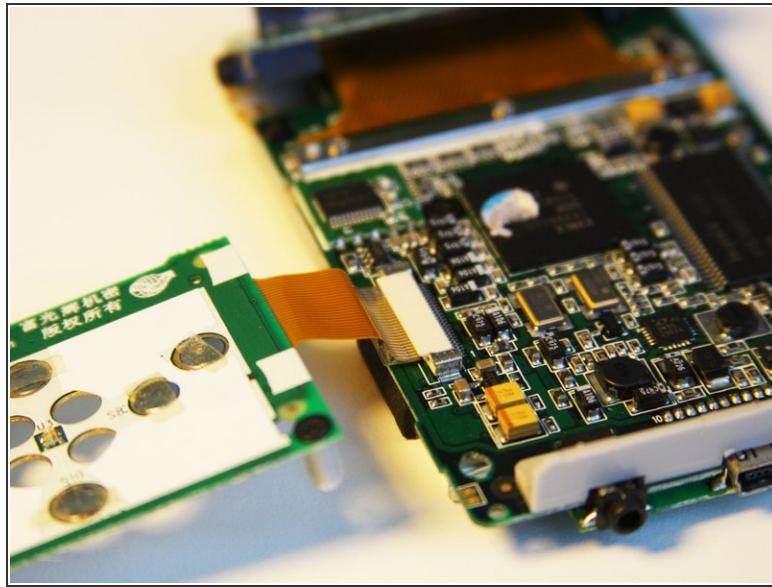

- The ribbon should easily detach from the motherboard.

To reassemble your device, follow these instructions in reverse order.