




Dell Alienware 13 R3 Solid-State Drive Replacement

In this guide, we will be showing you how to remove and replace the Solid-State Drive.

Written By: Terrence15

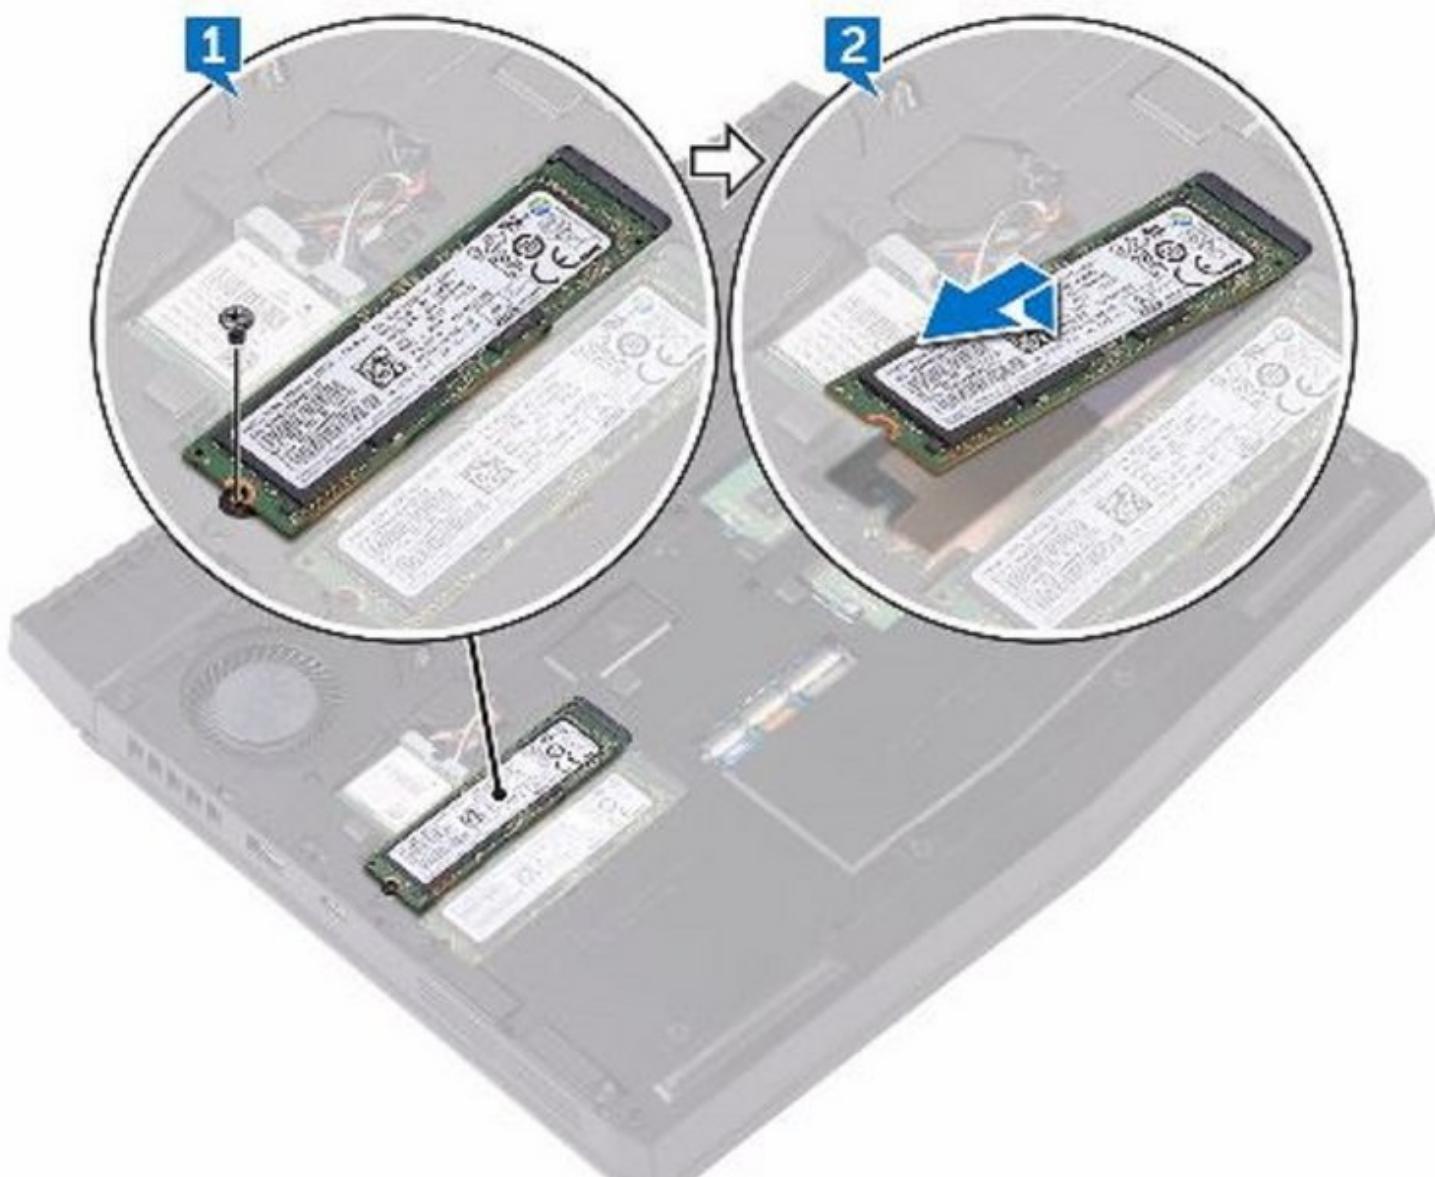

INTRODUCTION

In this guide, we will be showing you how to remove and replace the Solid-State Drive.

TOOLS:

- Pro Tech Toolkit (1)

Step 1 — Loosen the Screws



⚠️ WARNING: Before working inside your computer, read the safety information that shipped with your computer and follow the steps in [Before Working Inside Your Computer](#). After working inside your computer, follow the instructions in [After Working Inside Your Computer](#).

- Loosen the five captive screws that secure the base cover to the computer base.

Step 2 — Pry the Base Cover



- Using a plastic scribe, gently pry the base cover to release the tabs on the base cover from the slots on the computer base.

Step 3 — Lift the Base Cover



- Lift the base cover off the computer base.

Step 4 — Disconnect the Battery Cable



- Using a plastic scribe, disconnect the battery cable from the system board.

Step 5 — Press and Hold the Power-Button



- Press and hold the power button for five seconds to ground the system board.

Step 6 — Connect the Battery Cable



- Connect the battery cable to the system board.

Step 7 — Slide the Tabs




- Slide the tabs on the **NEW** base cover into the slots on the computer base and snap the base cover into place

Step 8 — Tighten the Five Captive Screws



- Tighten the five captive screws that secure the base cover to the computer base.


Step 9 — Remove the Screw

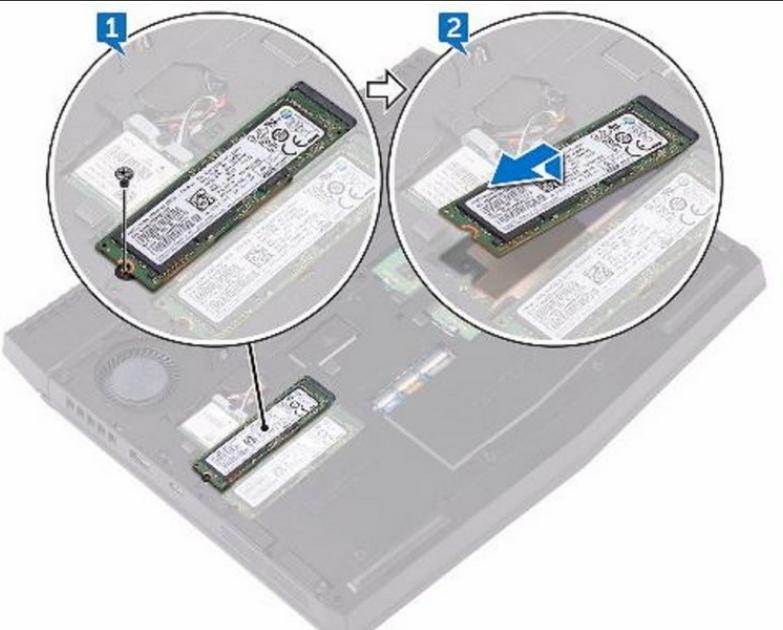

⚠️ **WARNING:** Before working inside your computer, read the safety information that shipped with your computer and follow the steps in [Before Working Inside Your Computer](#). After working inside your computer, follow the instructions in [After Working Inside Your Computer](#).

- Remove the screw (M2x3) that secures the solid-state drive to the computer base.

Step 10 — Lift and Slide the Solid-State Drive

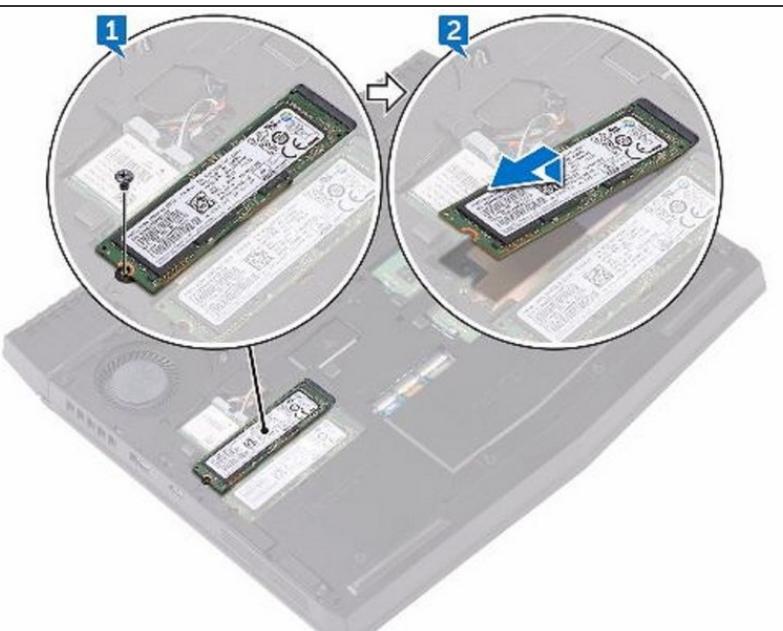


- Lift and slide the solid-state drive from the solid-state drive slot.

Step 11 — Align the Notch



- Align the notch on the **NEW** solid-state drive with the tab on the solid-state drive slot and slide the solid-state drive into the solid-state drive slot.

Step 12 — Press the Memory Module

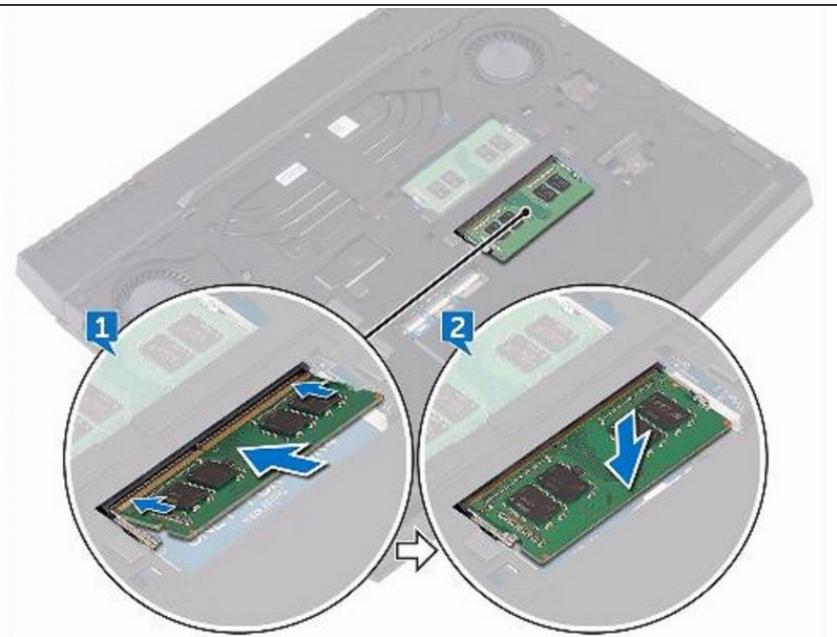

- Press the memory module down until it clicks into place.

To reassemble your device, follow these instructions in reverse order.