




Dell Inspiron 14 M4010 Display Assembly Replacement

Written By: Terrence15

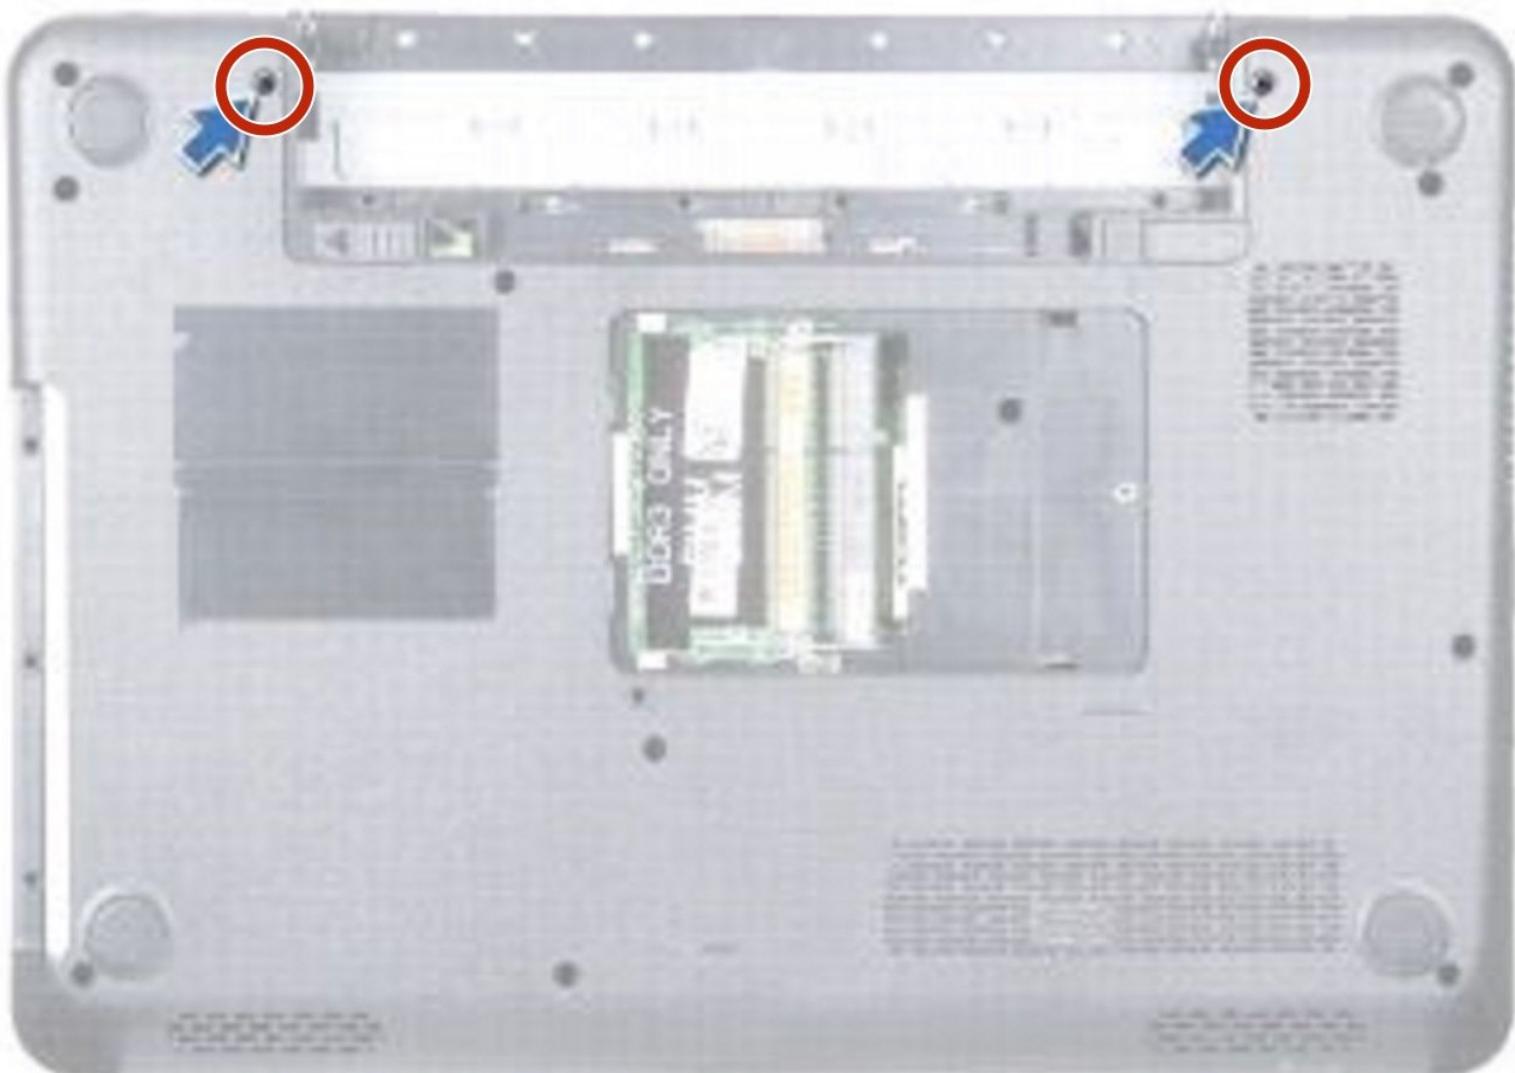


INTRODUCTION

In this guide, we will be showing you how to remove and replace the Display Assembly.

TOOLS:

- Phillips #0 Screwdriver (1)

Step 1 — Remove the Screws

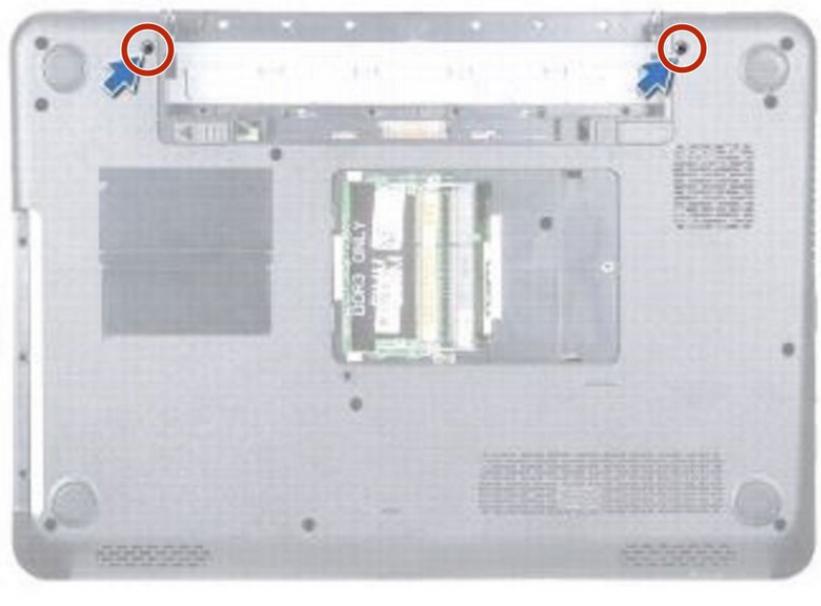

⚠️ **WARNING:** Before working inside your computer, read the safety information that shipped with your computer. Follow the instructions in [Before You Begin](#).


- Remove the two screws that secure the display assembly to the computer base.

Step 2 — Open the Display



- Turn the computer over and open the display as far as possible.

Step 3 — Disconnecting the Display Cable

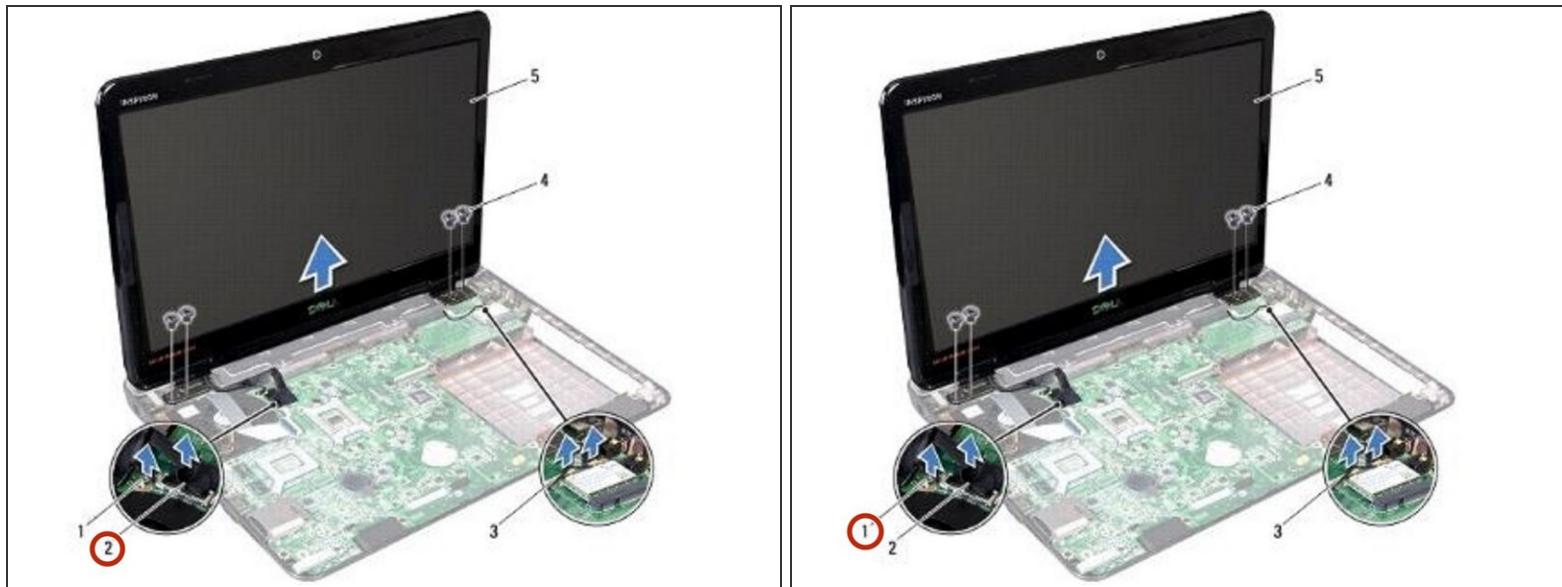

- Disconnect the display cable from the connector on the system board, and remove the display cable grounding screw.

Step 4 — Remove the Cables



- Make a note of the Mini-Card antenna cables and display cable routing and remove the cables from the routing guides.

Step 5 — Remove the Screws



- Hold the display assembly in place and remove the four screws that secure the display assembly to the computer base.

Step 6 — Removing the Display Assembly



- Lift and remove the display assembly out of the computer base.

Step 7 — Placing the Display Assembly



- Place the **NEW** display assembly in position and replace the four screws (two on each side) that secure the display assembly to the computer base.

Step 8 — Routing the Cables




- Route the Mini-Card antenna cables and display cable through the routing guides.

Step 9 — Replace the Display Cable




- Connect the display cable to the connector on the system board, and replace the display cable grounding screw.

Step 10 — Close the Display

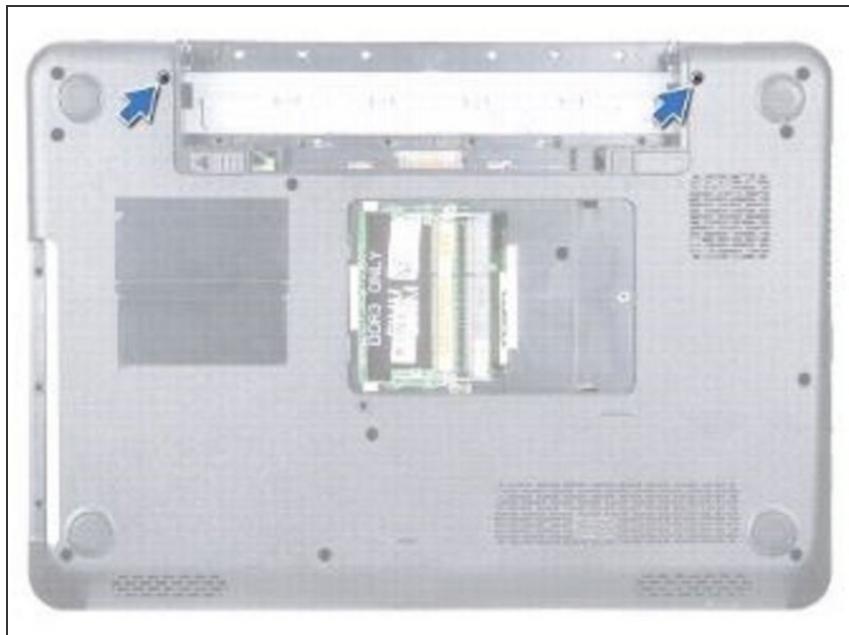

- Close the display and turn the computer over.

Step 11 — Replace the Screws

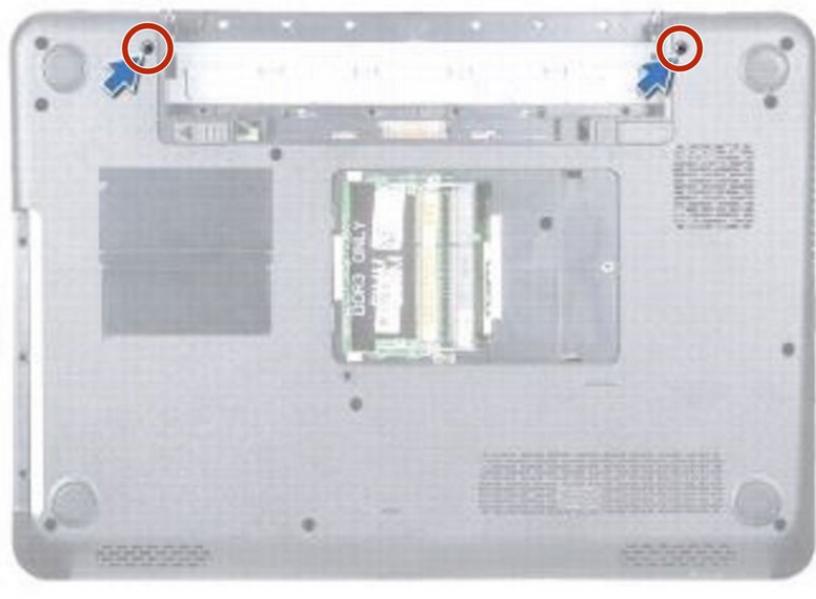

- Replace the two screws that secure the display assembly to the computer base.

 CAUTION: Before turning on the computer, replace all screws and ensure that no stray screws remain inside the computer. Failure to do so may result in damage to the computer.