




Disassembling VTech MobiGo Touch Learning System Screen Enclosure

Disassemble the screen enclosure of the VTech MobiGo Touch Learning System.

Written By: Daniel Kresge

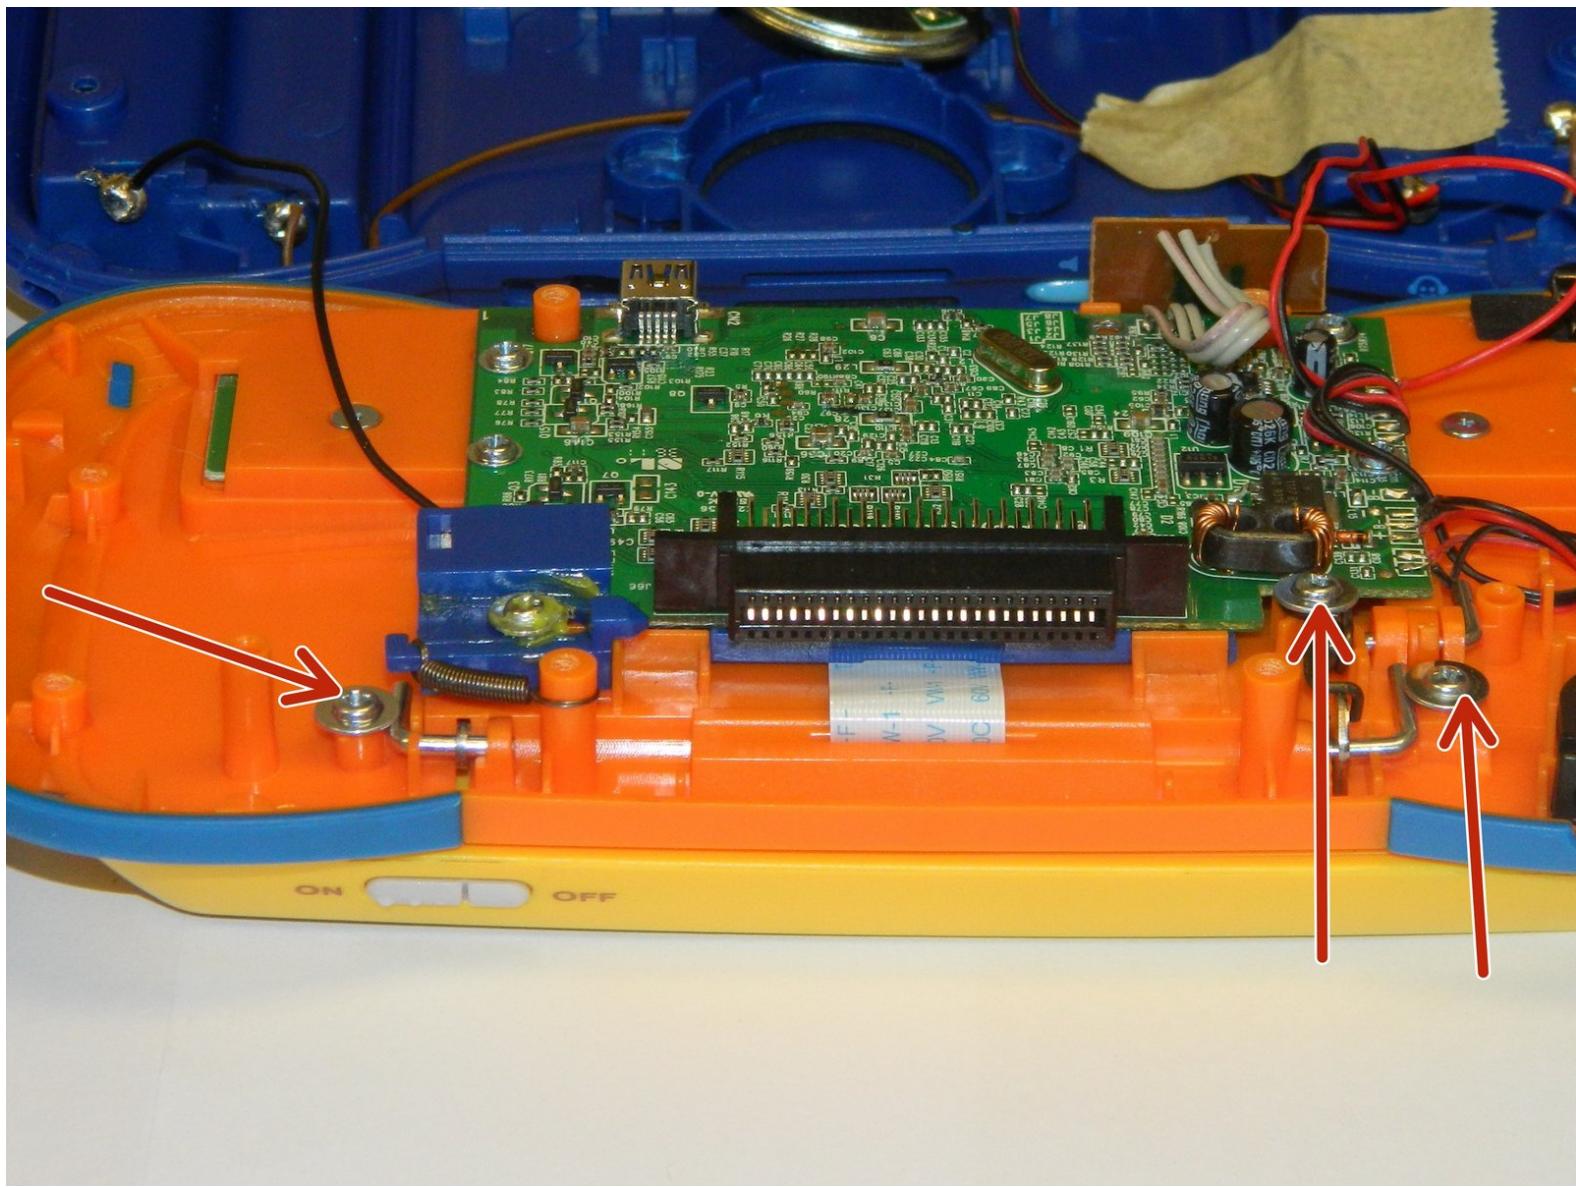

INTRODUCTION

The VTech has two cases. The main case housing the main circuit board and other components and a smaller enclosure that houses the screen and two buttons. This guide is how to disassemble the VTech to gain access to the screen and button components.

TOOLS:

- [Screwdriver](#) (1)
- [iFixit Opening Tools](#) (1)
- [Magnetic Project Mat](#) (1)

Step 1 — Case



- Remove the battery covers and the four batteries.

Step 2




- Remove the four plastic caps with a metal spudger to expose the 6.0 mm Philips JIS #0 case screws.
- Remove the eight 6.0 mm JIS #0 case screws.

Step 3




- Using a plastic opening tool, separate the two pieces of the case carefully.

Step 4 — Disassembling VTech MobiGo Touch Learning System Screen Enclosure

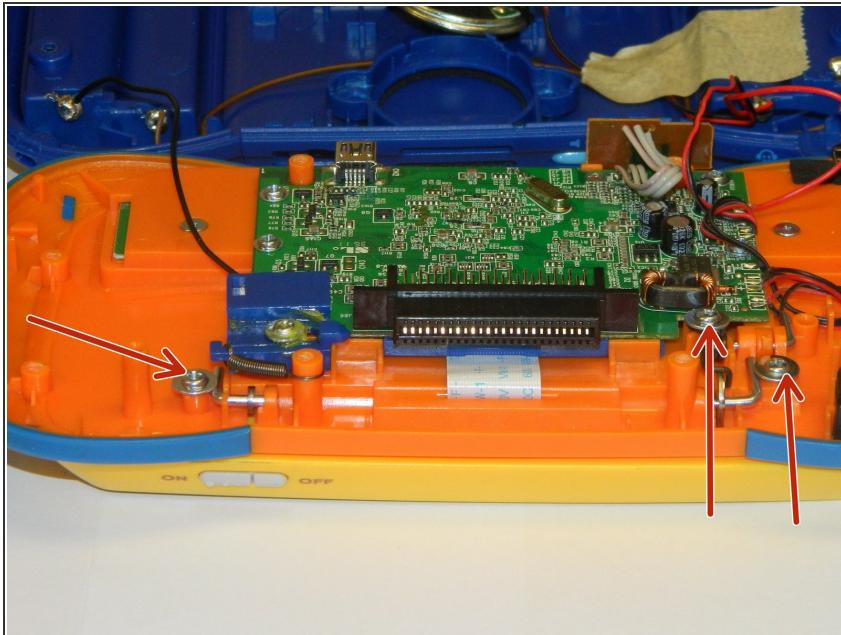


- Remove the three 4.0 mm Philips J0 screws holding the "L" shaped brackets in place.

Step 5

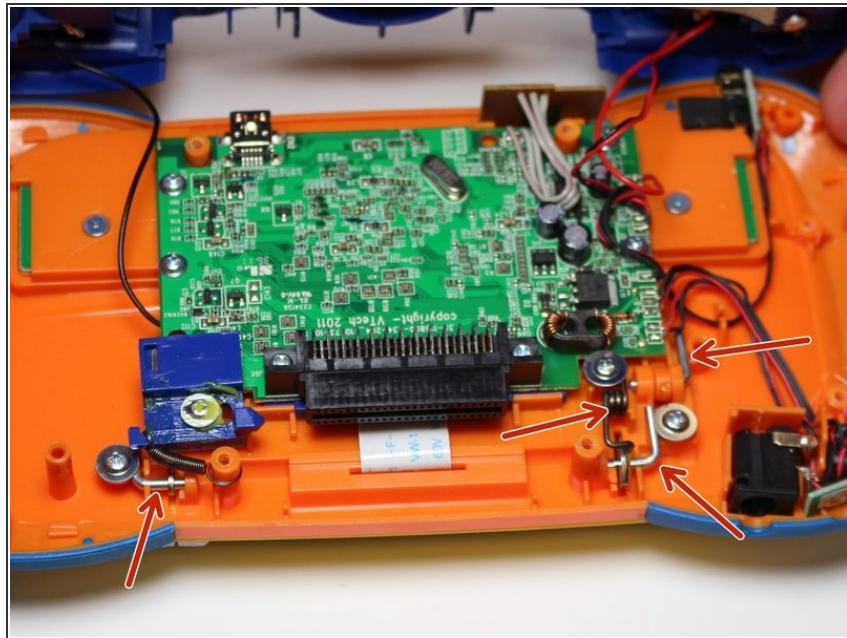


- Remove the three "L" shaped brackets and the spring.

Step 6

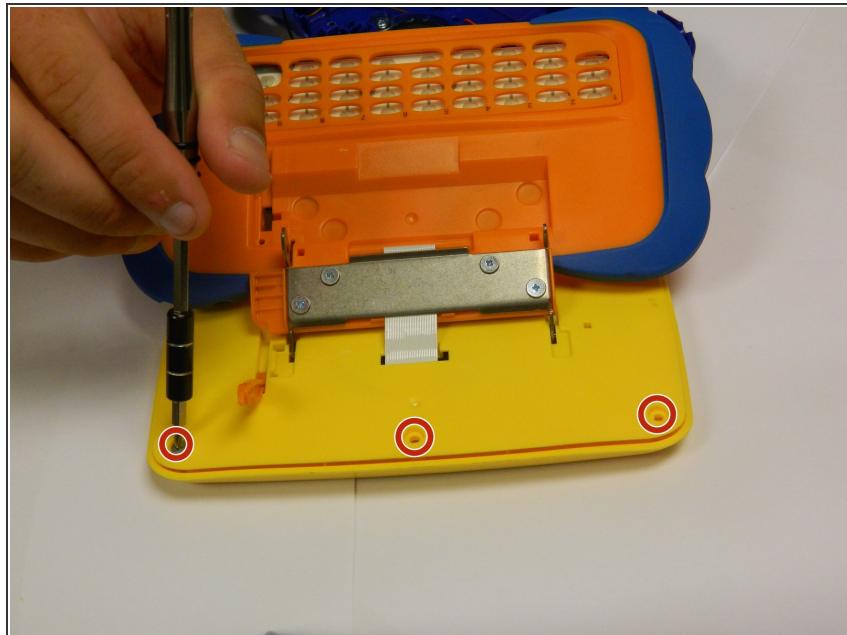

- Flip the device over and remove the three 4.0 mm Philips J0 case screws.

Step 7

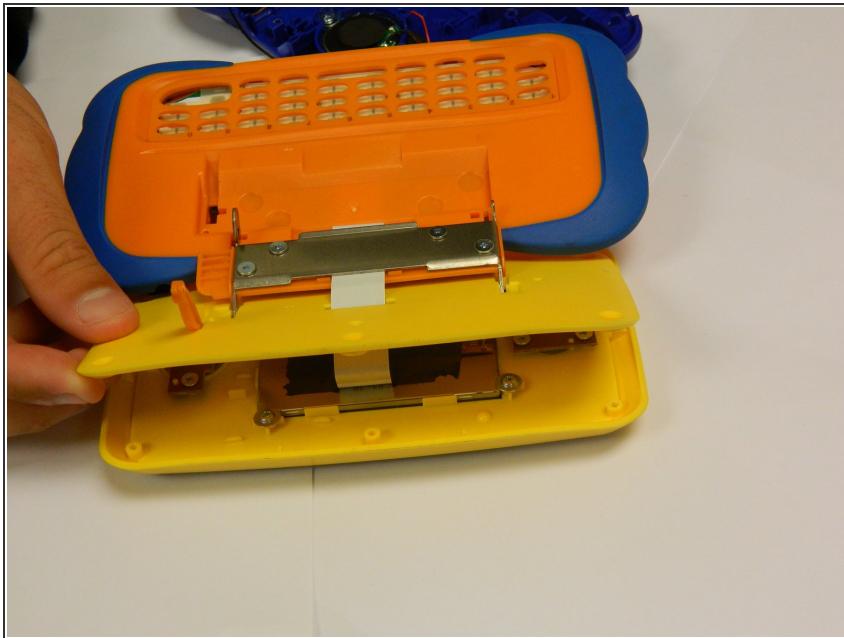

- Separate the front and back of the case.

i Use a plastic opening tool if necessary.

To reassemble your device, follow these instructions in reverse order.