



FitBit Surge Teardown

This is a complete teardown of Fitbit surge, let's see what makes this "Ultimate Fitness Super Watch" tick.

Written By: Tiago Monte



INTRODUCTION

This is a complete teardown of Fitbit surge, let's see what makes this "Ultimate Fitness Super Watch" tick.

TOOLS:

- Pro Tech Toolkit (1)

Step 1 — The Surge



- Fitbit's latest fitness "super watch" has some pretty nice features, including:
 - Built-in GPS
 - Wrist-based optical heart rate monitor
 - Wireless syncing to smartphone or computer
 - 7+days of battery life without gps and up to 7h with gps (according to some [reviews](#))

Step 2 — Removing the bands



- Remove the four screws
- The bands are glued pretty well so you need to cut your way through to remove them and expose the fibit body
- Cutting through the middle and lifting sideways worked pretty well

Step 3 — GPS antenna



- Once you remove the bands scrape away the glue on the top side to expose the GPS antenna

Step 4 — Bluetooth antenna




- On the other band you'll find the bluetooth antenna which is actually a flexible antenna glued to the inside of the band.
- This antenna can be left on the surge if you try to detach wrist band by fitting something thin between front glass and the band.

Step 5 — Opening the body




- With the bands out of the way it's time to go inside Fitbit's guts
- Remove the four metal parts as shown in the photo
- After that just insert a screw driver or other sharp object into the fissure and voilá

Step 6 — Touchscreen controller

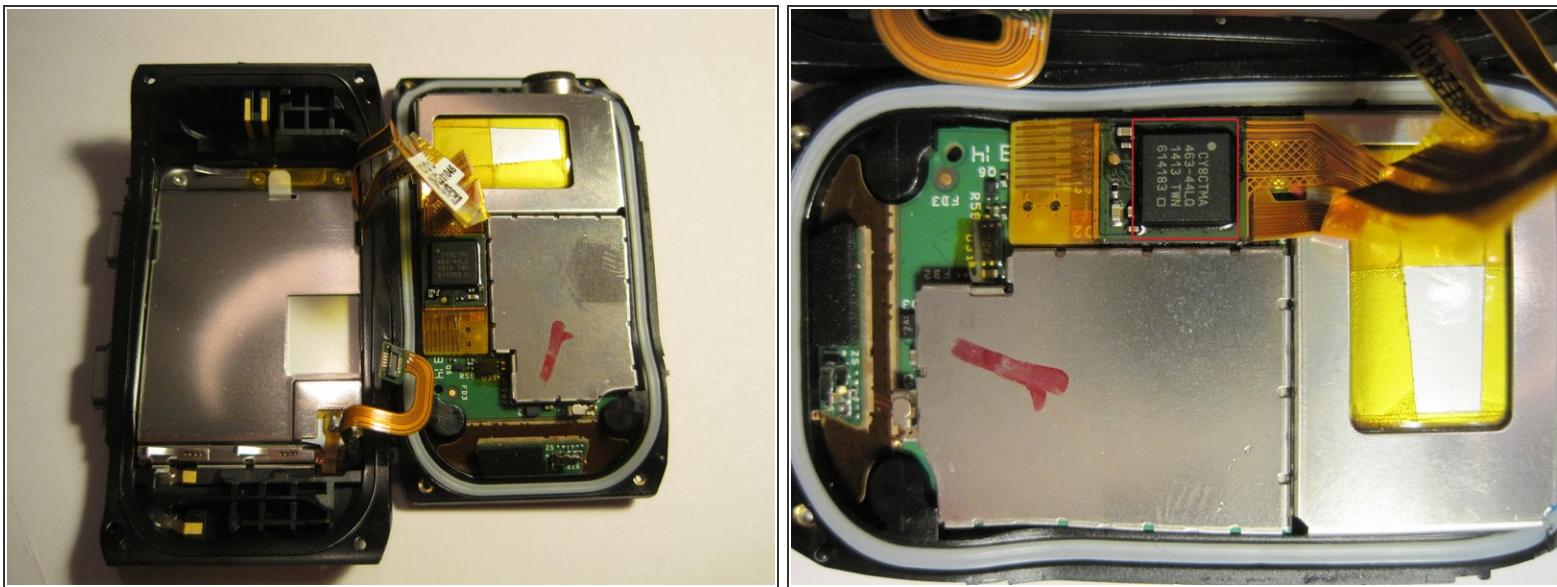



- Right after splitting Fitbit into 2 the first component is immediately exposed
 - Cypress [CY8CTMA463](#) touchscreen controller

Step 7 — Microcontroller

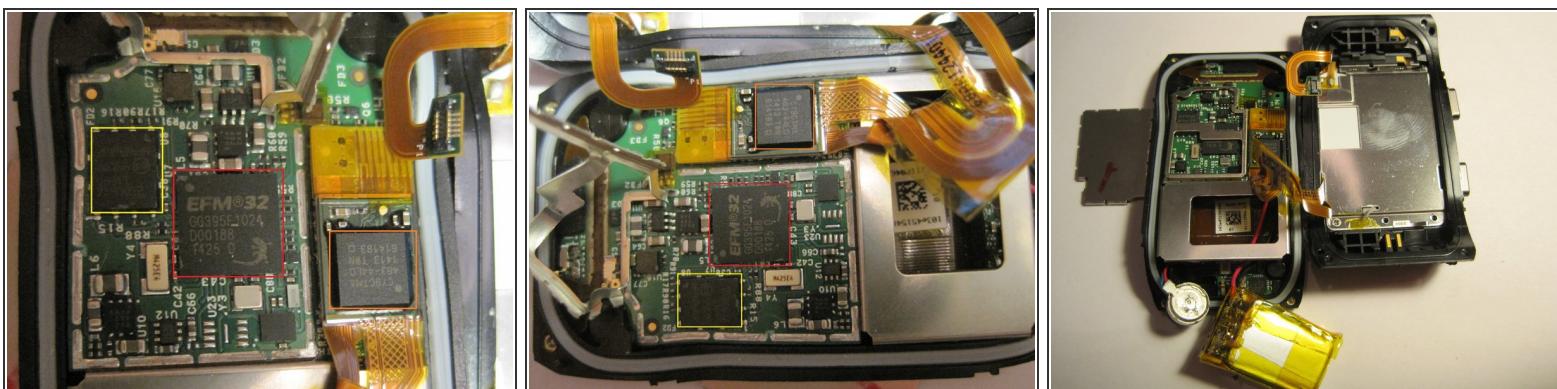

- After removing the large shield on the main PCB the brains of the gadget become visible
 - Silicon Labs EFM32 Giant Gecko (ARM Cortex-M3) [EFM32GG395F1024](#)
 - Micron Serial NOR Flash [N25Q064A11ESEA0F](#)
 - (Cypress touchscreen controller still visible here plugged into the main PCB)

Step 8 — The other side

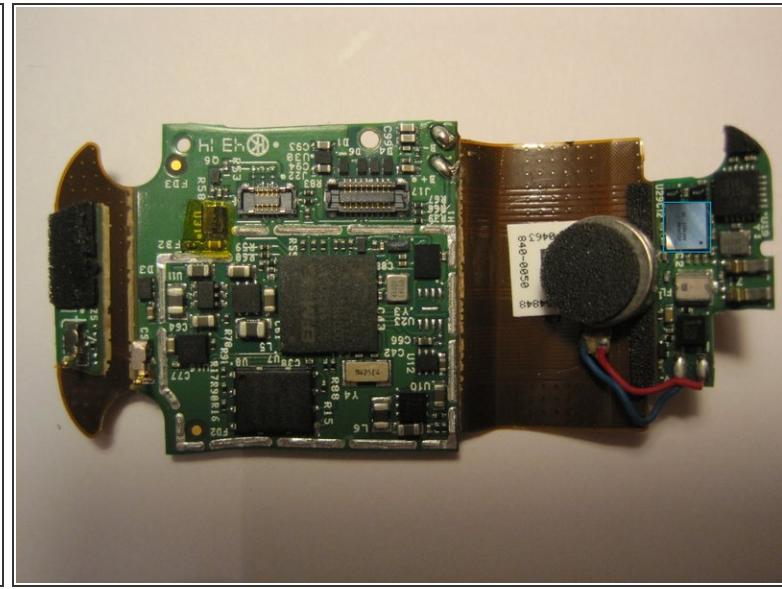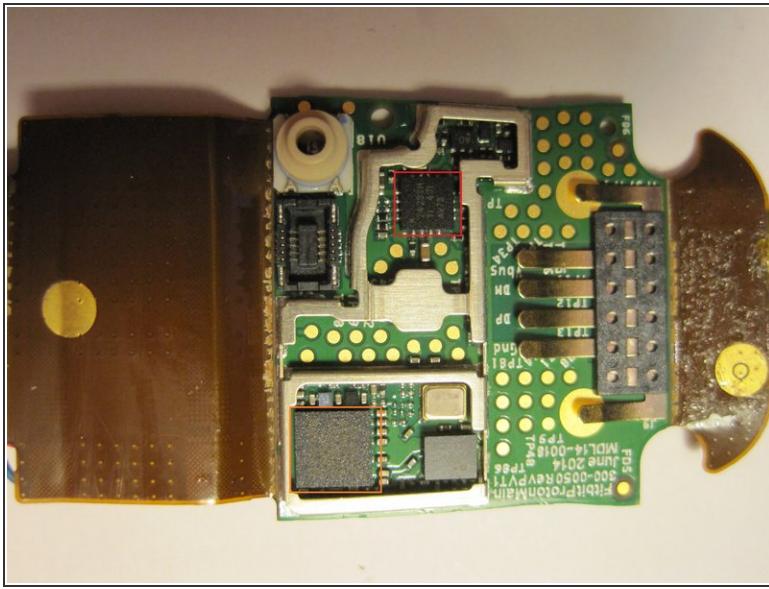

- After removing the battery holder the main PCB can be carefully dislodged from the plastic body
 - Texas Instruments Battery Charger [BQ24232H](#)
 - MediaTek GPS Receiver MT3339 (couldn't find any datasheet, just a [press release](#) on it)
 - Texas Instruments Bluetooth Controller [CC2564](#)

Step 9 — LCD and back side



- The LCD is secured with 3 very visible screws on the bottom side
- Sharp TFT-LCD [LS013B7DH01](#)

Step 10 — Family photo



- Here are all the parts after the teardown