
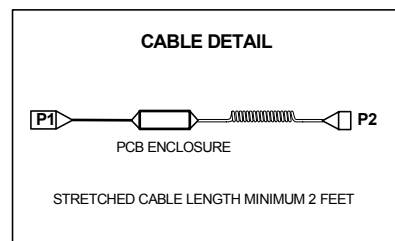


Rev	ECO	Date
B		3-18-05

PURCHASED PART

COIL CORD ASSEMBLY TAKEN FROM
THALES 25 Palm Spk/Mic 1600469-9
(JPS P/N 0314-000219)

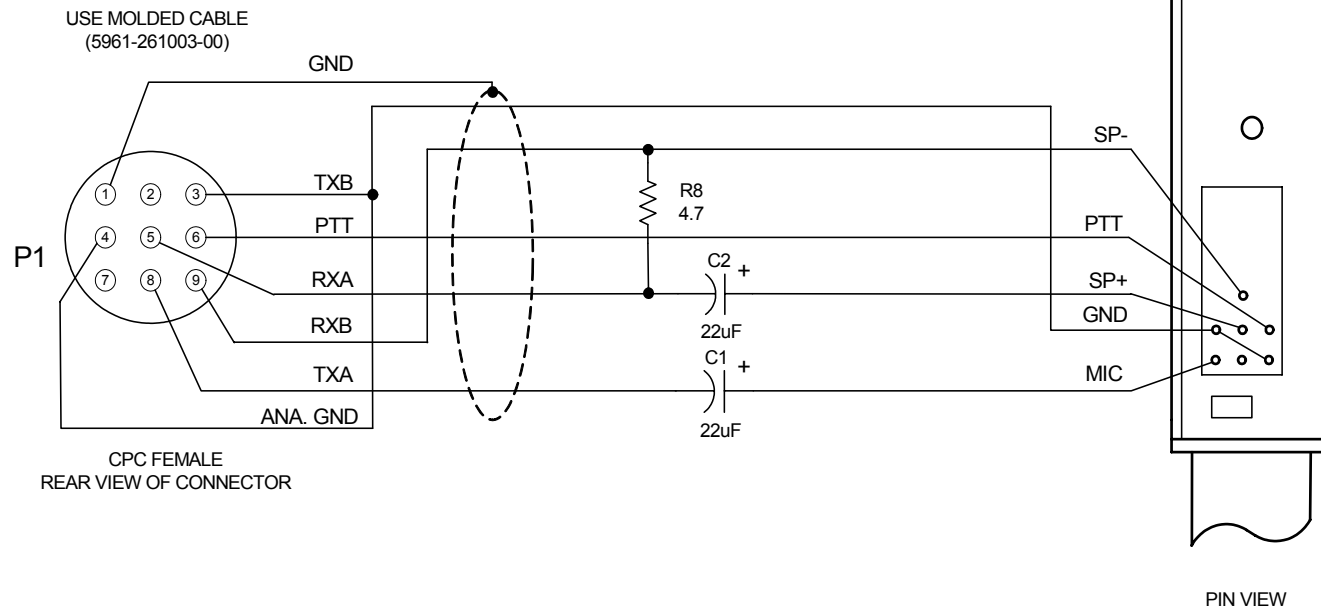

COMPONENT PCB (JPS P/N 5961-271000)	
C1	JPS P/N 0321-220250
C2	JPS P/N 0321-220250
R8	JPS P/N 1820-047000
JU2	
JU5	


NOTES: SHIELD DRAIN CONNECTED TO PIN 1 OF P1 ONLY.

USED WITH:
THALES 25 PORTABLE RADIO (PRC 6894)

Designed By:	RBP	Raytheon JPS Communications Raleigh, NC USA		
Drawn By:	RBP	Title CABLE, CPC TO THALES 25		
Checked By:	CTS	Size A	Document Number 5961-271289	Rev B
		Issued Date	March 11, 2005	Sheet <u>1</u> of <u>1</u>

PURCHASED PART

Rev	ECO	Date
A		

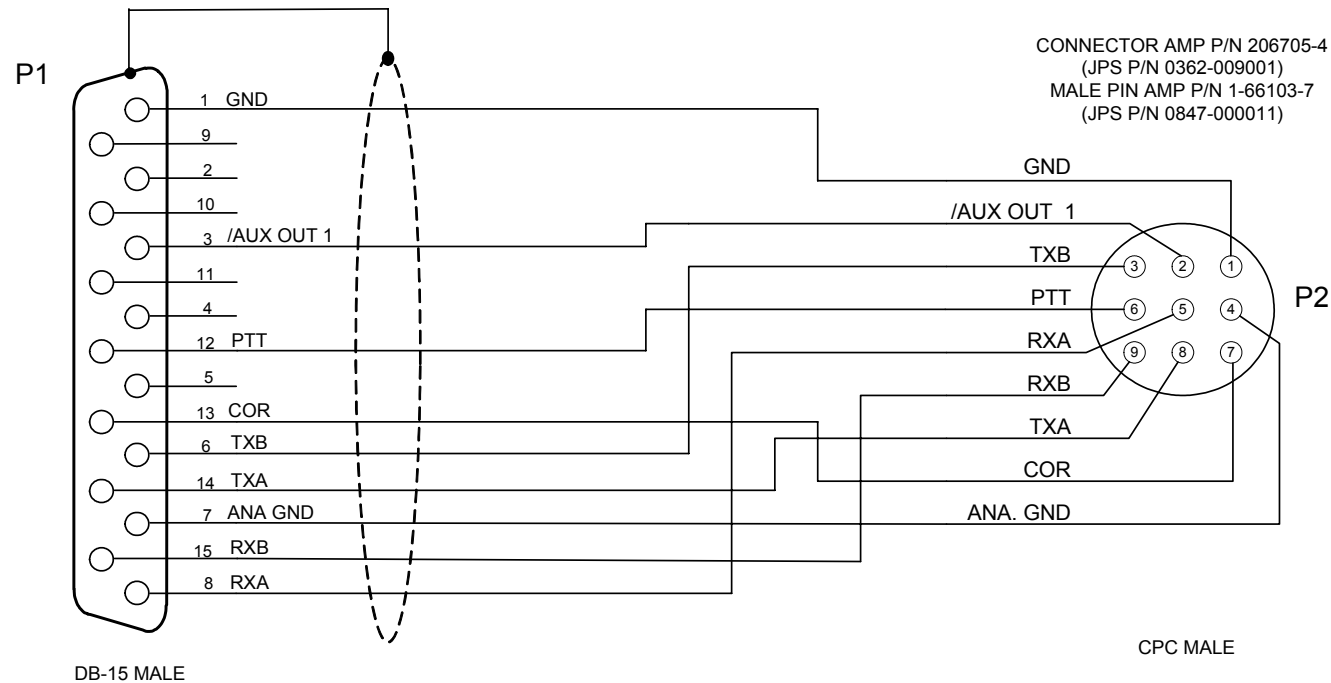

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.
2) CONNECT SHIELD DRAIN TO SHELL OF P1 ONLY.
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).


Designed By: JAC	Raytheon JPS Communications		
Drawn By: JAC	Title CABLE, ACU-1000 RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number 5961-261002-00	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	

Rev	ECO	Date
A		

PURCHASED PART

CONNECTOR AMP P/N 206708-1
(JPS P/N 0362-005003)
FEMALE PIN AMP P/N 1-66105-8
(JPS P/N 0362-005002)

CONNECTOR AMP P/N 206705-4
(JPS P/N 0362-009001)
MALE PIN AMP P/N 1-66103-7
(JPS P/N 0847-000011)

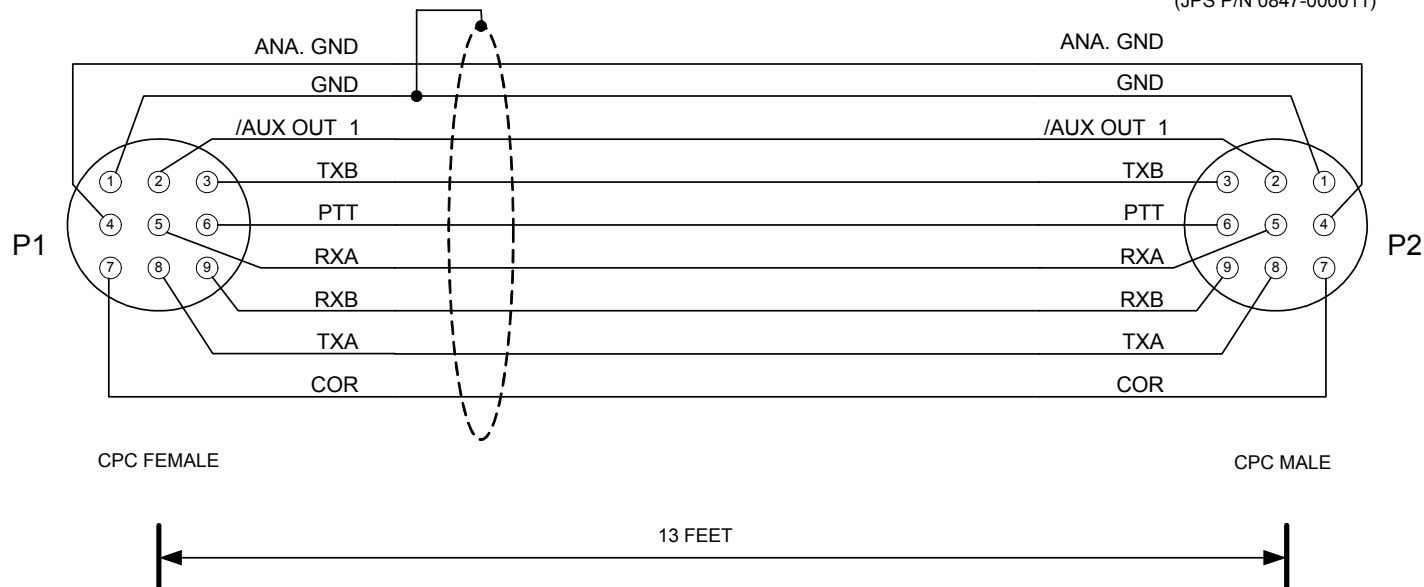

- NOTES: 1) USE BELDEN 9934 SHIELDED CABLE.
2) CONNECT SHIELD DRAIN TO PIN 1 OF P1 ONLY.
3) CONNECTORS P1 AND P2 MUST BE MOLDED TO THE CABLE.
4) CABLE MUST BE LABELED WITH THE RAYTHEON/JPS P/N AND REV, VENDOR CODE AND DATE (MM/YY).

Designed By: JAC	Raytheon JPS Communications Raleigh, NC USA		
Drawn By: JAC	Title CABLE, ACU-T RADIO EXTENSION - 13 FT		
Checked By: RBP	Size A	Document Number 5961-281013-00	Rev A
Issued Date JANUARY 5, 2004		Sheet <u>1</u> of <u>1</u>	