



# JBL Pulse 3 Motherboard Replacement

This guide will accomplish the replacement of the motherboard for the JBL Pulse 3.

Written By: Kaitlyn Greenfield



## INTRODUCTION

The motherboard for the JBL Pulse 3 is located inside the LED light display next to the battery.

### TOOLS:

- iFixit Opening Tools (1)
- Phillips #0 Screwdriver (1)
- Phillips #1 Screwdriver (1)
- Phillips #2 Screwdriver (1)
- Tweezers (1)
- Flush Wire Cutters (1)
- Soldering Iron (1)

### PARTS:

- JBL Pulse 3 Motherboard (1)

## Step 1 — Speaker Grill



- Lay the JBL Pulse 3 on its side as shown in the picture.
- Use a plastic opening tool to lift the top right corner of the speaker grill. A small amount of force is necessary to remove the grill.

## Step 2



- Repeat step 1 for bottom right corner of speaker grill.

## Step 3



- After pulling the right side of the grill off, place thumb underneath grill as shown in the picture.
- Lift and pull straight out to pull grill off the posts.

## Step 4



- Repeat steps 1-3 for the left side of the speaker grill on the JBL Pulse 3. The speaker grill should now be completely removed from the JBL Pulse 3.

## Step 5 — Outside Casing



- Use a Phillips #00 screwdriver to remove the six black 6mm screws on the inside of the top of the bottom section.

## Step 6



- Turn the JBL Pulse 3 right-side up and unscrew the top ring of the device. A small amount of force and/or a cotton cloth may be necessary to remove this piece.

## Step 7




- Remove the six 5mm screws on top of the JBL Pulse 3 with a Phillips #0 screwdriver.

## Step 8



- Pull off the top disc of the JBL Pulse 3.

## Step 9

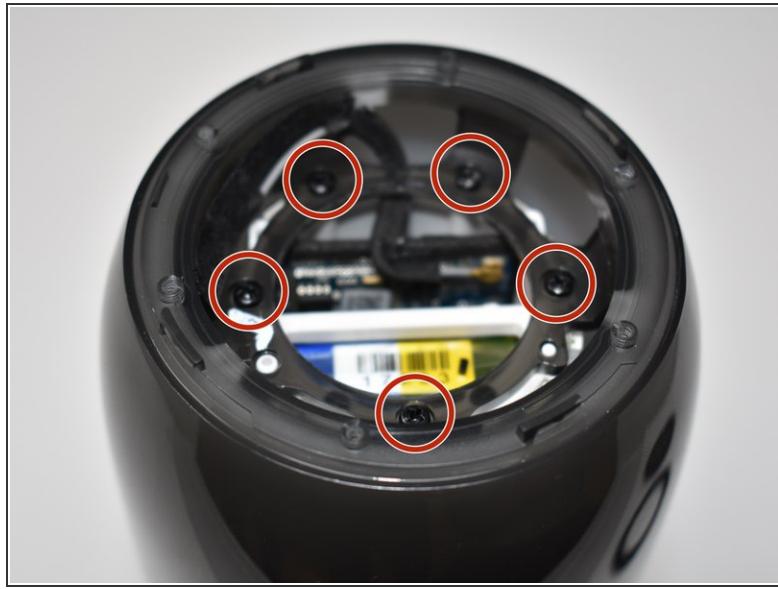

- Remove the five 7mm screws on the inside of the JBL Pulse 3 with a Phillips #1 screwdriver.

## Step 10




- Peel off black, taped-on electrical lead from the inside side of the JBL Pulse 3.

## Step 11



- Pull the top section of the JBL Pulse 3 up. The outside casing to the JBL Pulse 3 should now be removed.

## Step 12 — LED Light Display

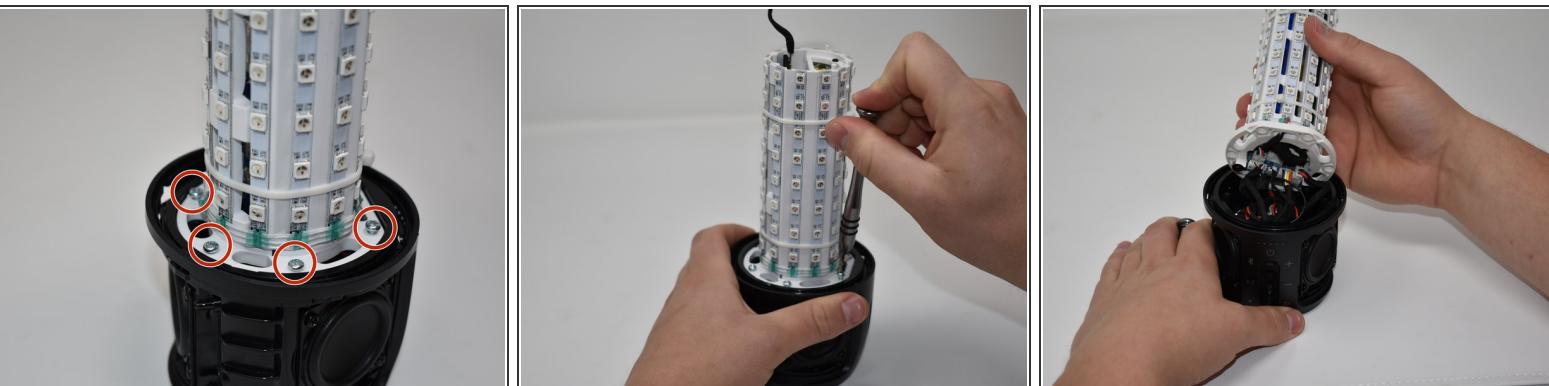

- Use a Phillips #2 screwdriver to remove the six 11 mm screws that circle the bottom of the LED light display.
- Pull the LED light display off of the JBL Pulse 3 base.

## Step 13




- Use tweezers to pull the five connections off of the LED light display.

## Step 14 — Motherboard




- Using a Phillips #0 screwdriver, remove the two black 8mm screws on the bottom of the LED light display.

## Step 15

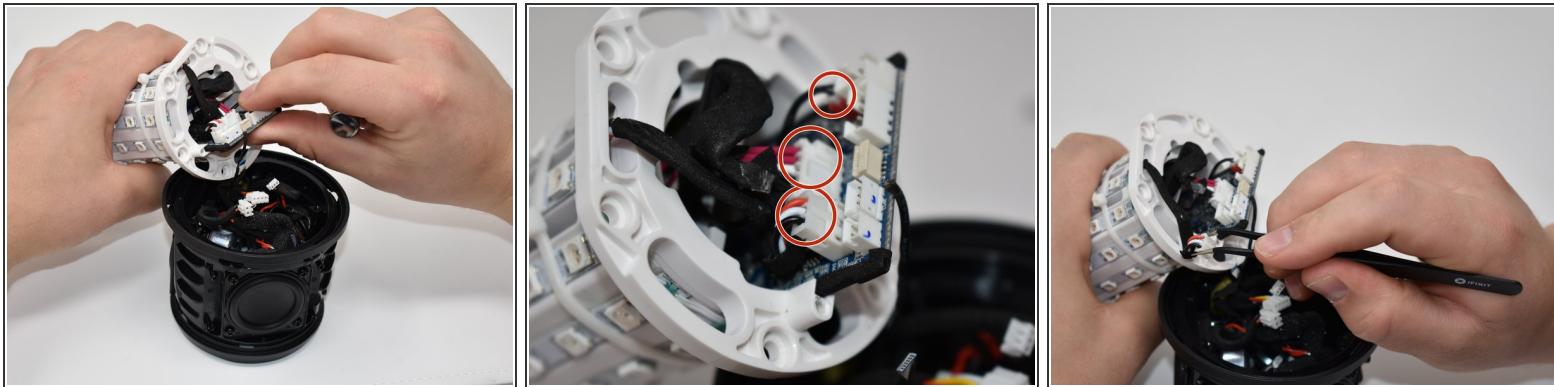

- Pull out the motherboard slightly from the LED light display as shown. Using tweezers, unplug the three connections attached to the motherboard.

## Step 16

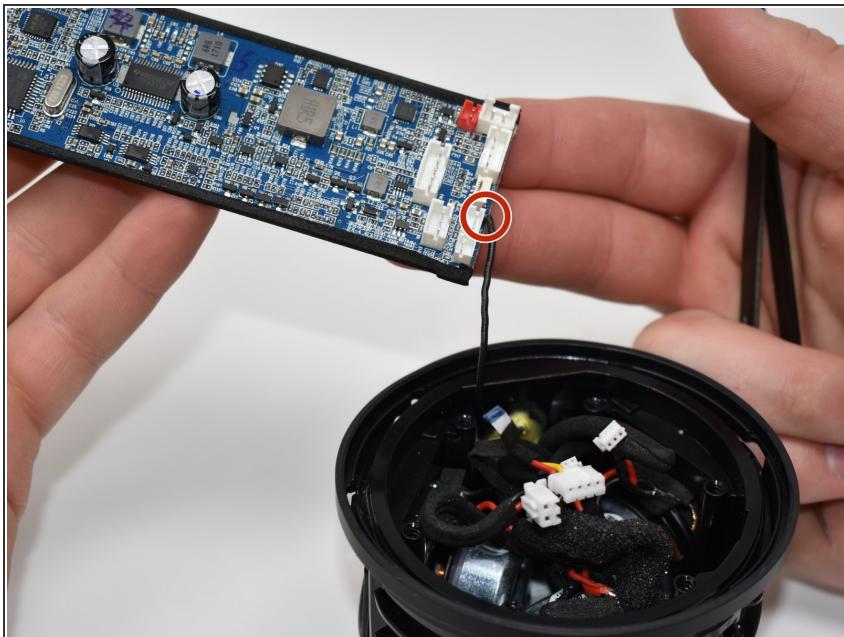

- Pull the rest of the motherboard out from the LED light display.
- Using wire cutters, snip the black wire connecting to the base of the JBL Pulse 3 at the base of the motherboard. The motherboard should now be removed from the JBL Pulse 3.

To reassemble your device, follow these instructions in reverse order.

Note: To replace the motherboard, you will need to re-solder the black wire to the motherboard.