




# MacBook Pro 15" Retina Display Mid 2014 IO Board Cable Replacement

Replace the I/O board cable in a MacBook Pro 15" Retina Display Mid 2014.

Written By: Andrew Optimus Goldheart

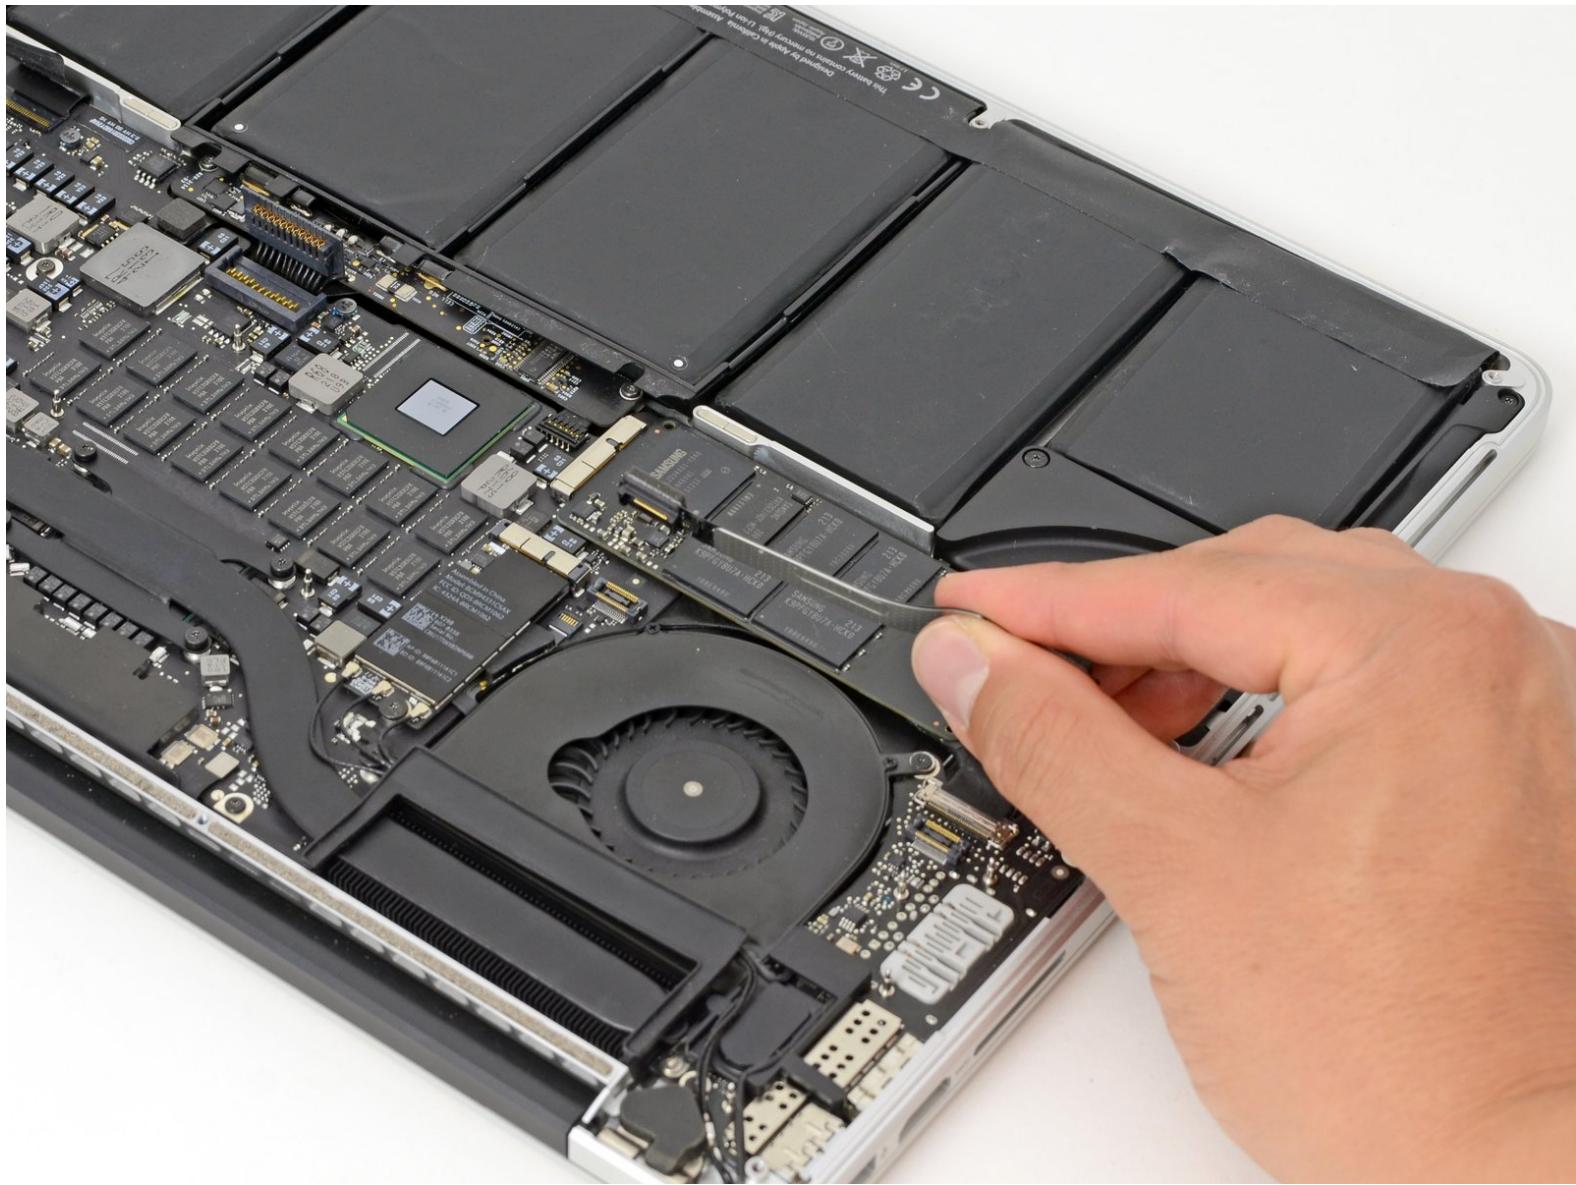

## INTRODUCTION

Input, Output, Sideput. Whatever kind of putting you will be doing, a faulty I/O board cable is going to severely limit the functionality of your MacBook Pro with Retina display. This guide will show you how to replace it.


### TOOLS:

- MacBook Pro and Air 5-Point Pentalobe Screwdriver (1)
- Spudger (1)

### PARTS:

- MacBook Pro 15" Retina (Late 2013 Mid 2014) I O Board Data Cable (1)

## Step 1 — Lower Case

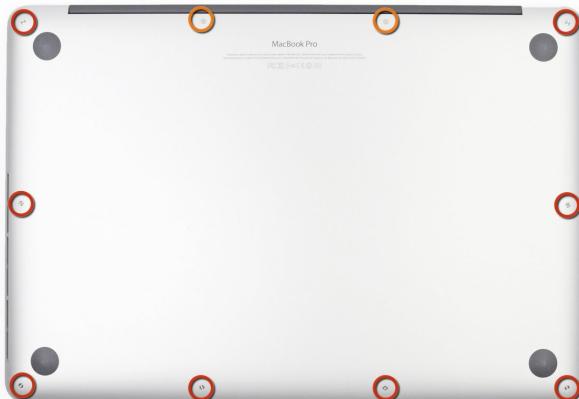

- Remove the following P5 pentalobe screws securing the lower case to the MacBook Pro:
  - Eight 3.0 mm
  - Two 2.3 mm

## Step 2





- Lifting from the edge nearest the clutch cover, lift the lower case off the MacBook Pro.
- Set the lower case aside.

## Step 3 — Battery Connector



- Peel back the warning label covering the battery connector.

## Step 4

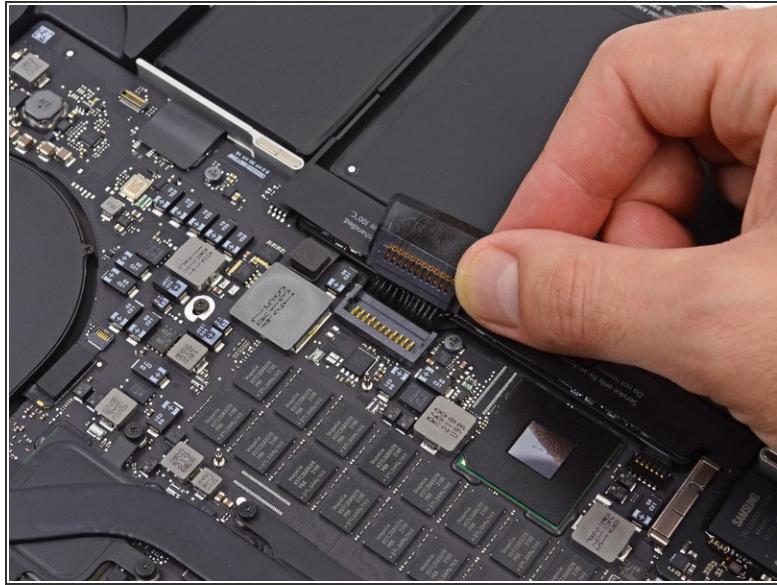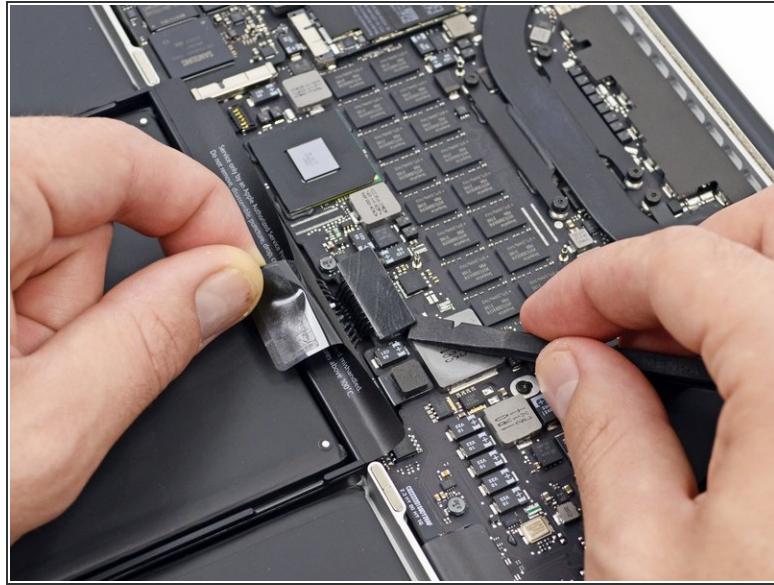


- Using the flat end of a spudger, gently pry the battery connector straight up out of its socket on the logic board.
- Bend the battery cables back and out of the way, ensuring that the battery connector doesn't accidentally make contact with the logic board.

## Step 5 — I/O Board Cable



- Using the flat end of a spudger, pry the I/O board cable straight up out of its socket on the I/O board.
- In a similar fashion, remove the I/O board cable from its socket on the I/O board.

## Step 6

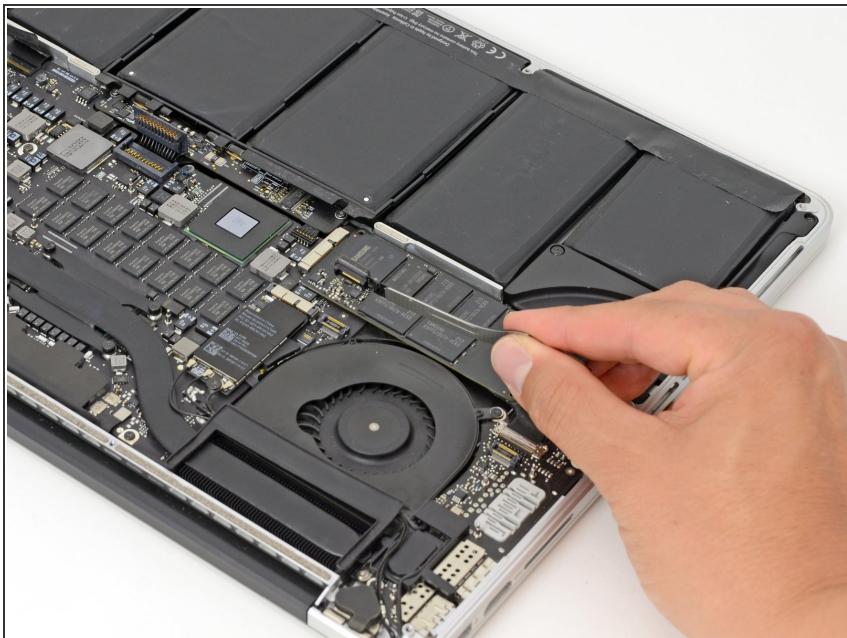

- Remove the I/O board cable from the MacBook Pro.

To reassemble your device, follow these instructions in reverse order.