




OLPC XO-4 Touch Antenna Replacement

Replace the antennae on the OLPC XO-4 Touch.

Written By: Matthew Smith

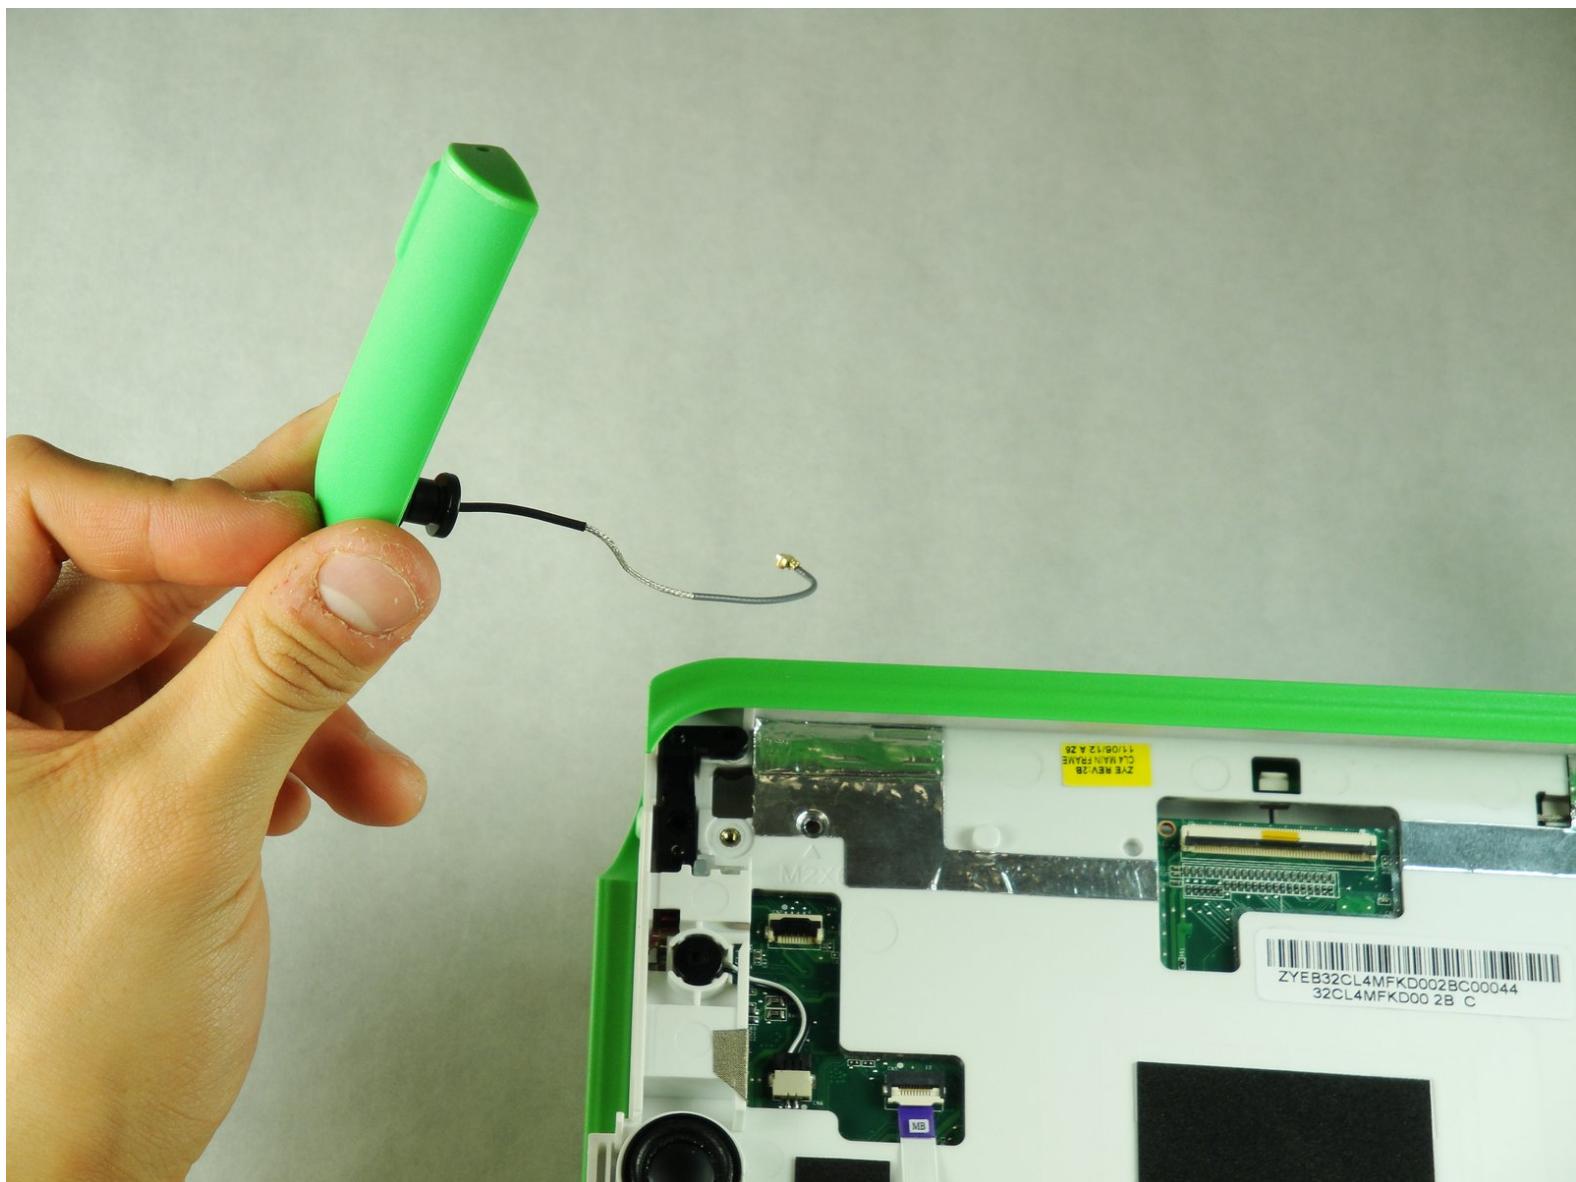

INTRODUCTION

How to replace the two antenna on the OLPC XO-4 Touch.

TOOLS:

- Phillips #1 Screwdriver (1)

Step 1 — Battery



- Turn the laptop upside-down, with the handle facing away from you.

Step 2



- Pull the lock tabs towards the green outer edges of the laptop.
- Hold the left lock tab in the unlock position until the battery is completely removed in the next step.

Step 3



- Lift up on the middle of the battery to remove it from the device.

Step 4 — Screen Frame



- Remove the two 4mm Phillips #1 screws underneath the screen on the right-hand side.
- Rotate the screen 180° and remove the other two screws.

● You will have to put your screwdriver through the handle in order to reach the middle screw for both sides.

Step 5



- Remove the green side panel by pressing down on the small green button on the top and sliding the panel up.
- Repeat the step above for the panel on the other side.


Step 6



 Be careful not to pull the bottom too far out because a ribbon cable is under the frame and can easily break.

- Gently lift up the lower part of the frame and pull it down to free the screen frame.

Step 7

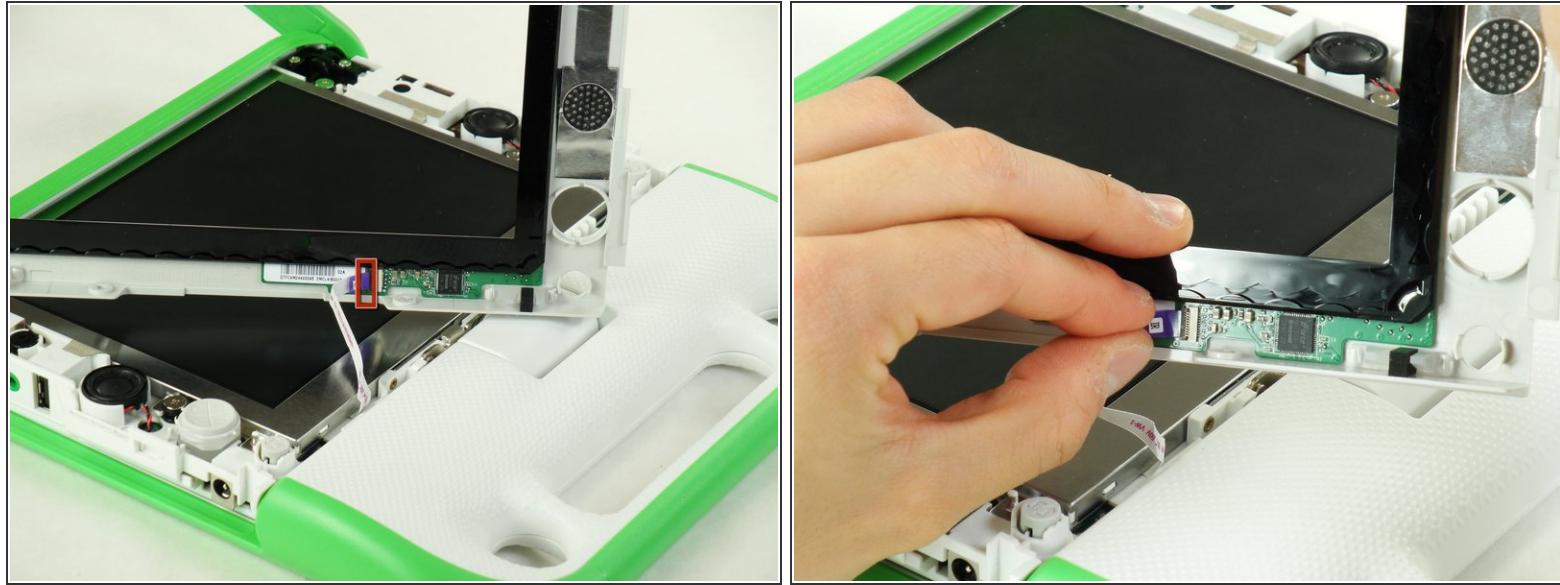

- Lift the black connector and pull the ribbon cable out by the purple tab, freeing the frame.

Step 8 — Screen



- Remove the four 7.62mm screws using a Phillips #1 screwdriver.


Step 9



⚠ Be careful not to pull the screen out too far. There are two ribbon cables attached to the screen, and they can easily break.

- Carefully lift the screen out.

Step 10

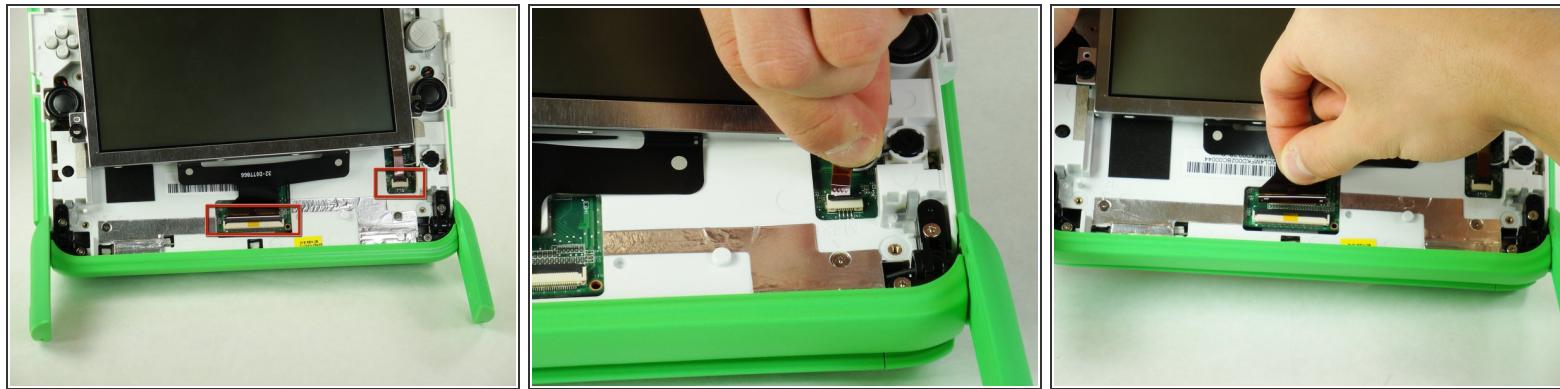

ⓘ Notice that the laptop in this picture has been turned 180° with the antennas now below the screen.


- For each ribbon cable, lift up the black connector and gently pull the ribbon cables out by the plastic tabs.

Step 11




- Remove the screen from the laptop.

Step 12 — Back Cover

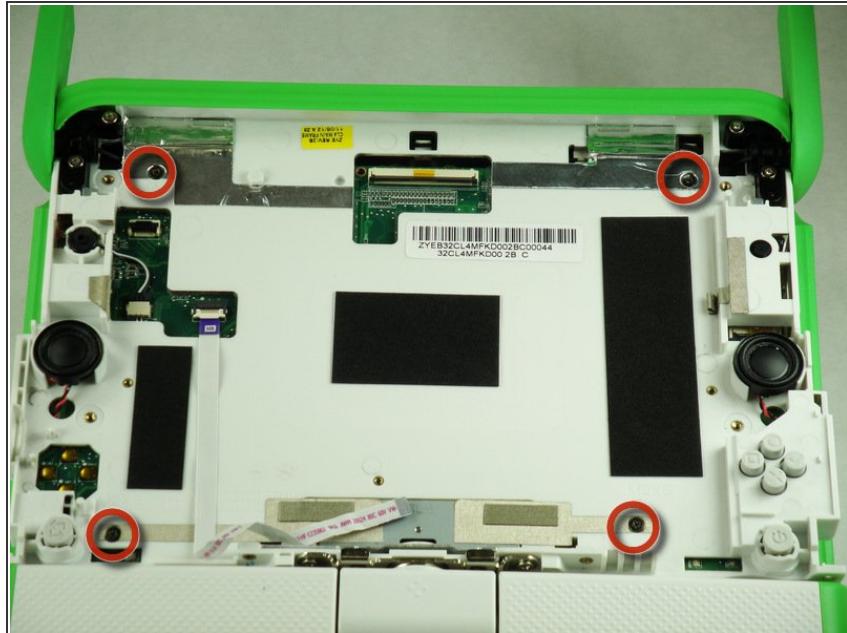

- Remove the four 6mm screws using a Phillips #1 screwdriver.

Step 13

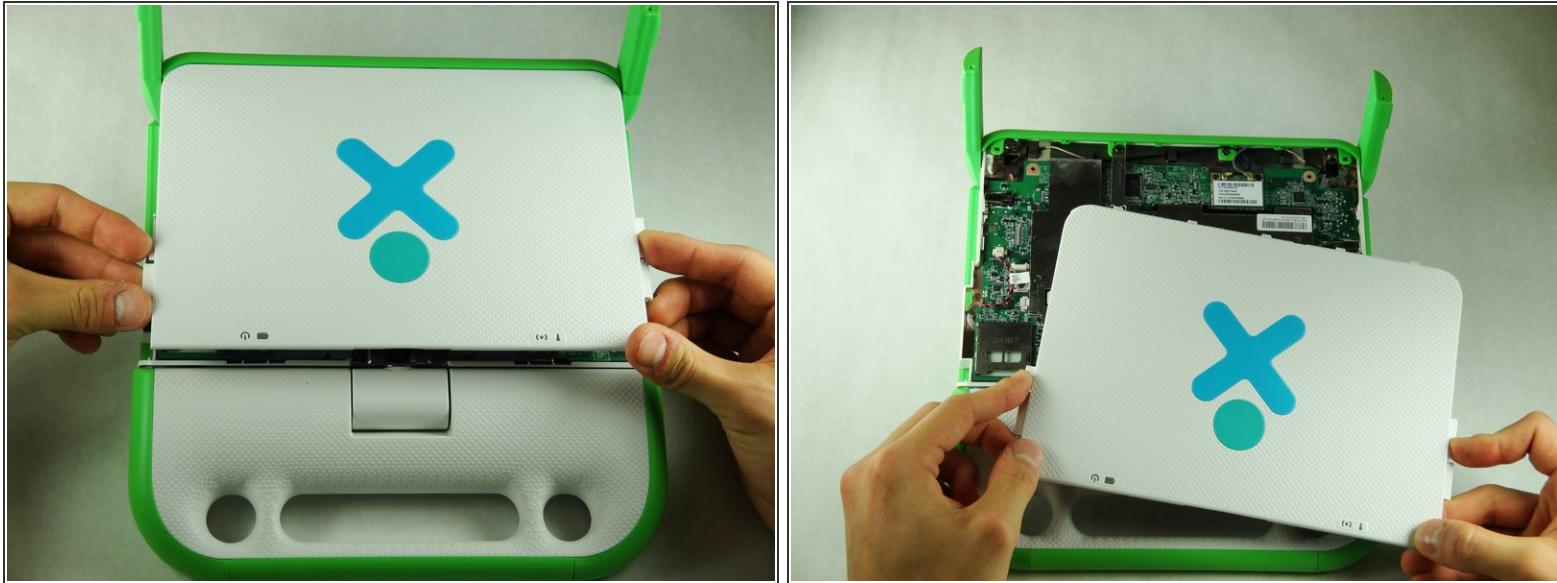

- Rotate the top half of the laptop so that the back cover is facing you.
- Pull up the tabs on the lower part of the back cover and pull it down and away from the antennas.
- Remove the back cover by gently lifting it off of the laptop.


Step 14 — Antenna



 When pulling out connectors, make sure to hold the metal connector instead of the wire.


- Gently unplug the two connectors by pulling them away from the motherboard.

Step 15

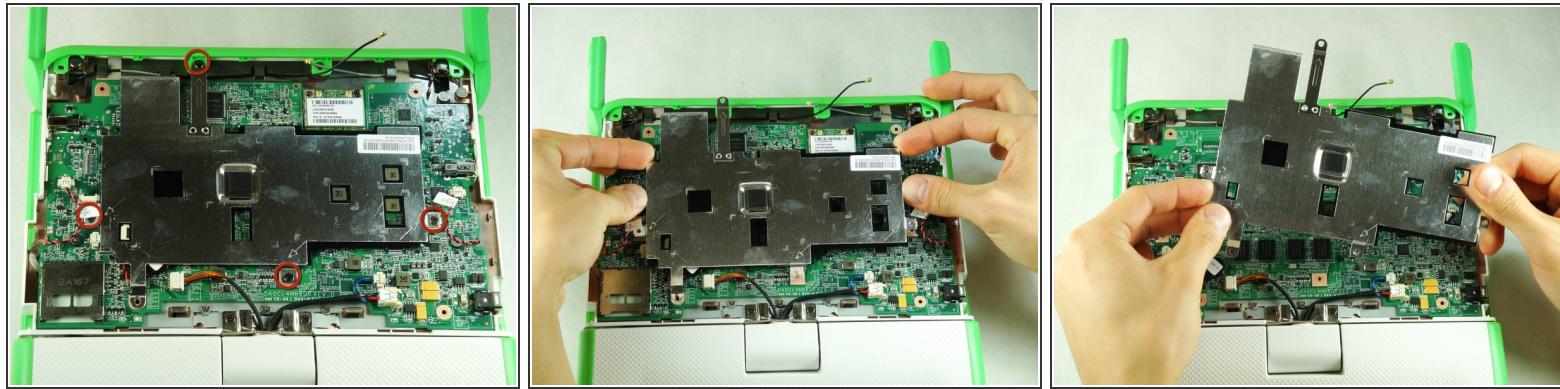


- Unscrew the four black 4mm Phillips #1 screws holding the metal cover on.
- Remove the metal cover by gently lifting it out of the laptop.

Step 16

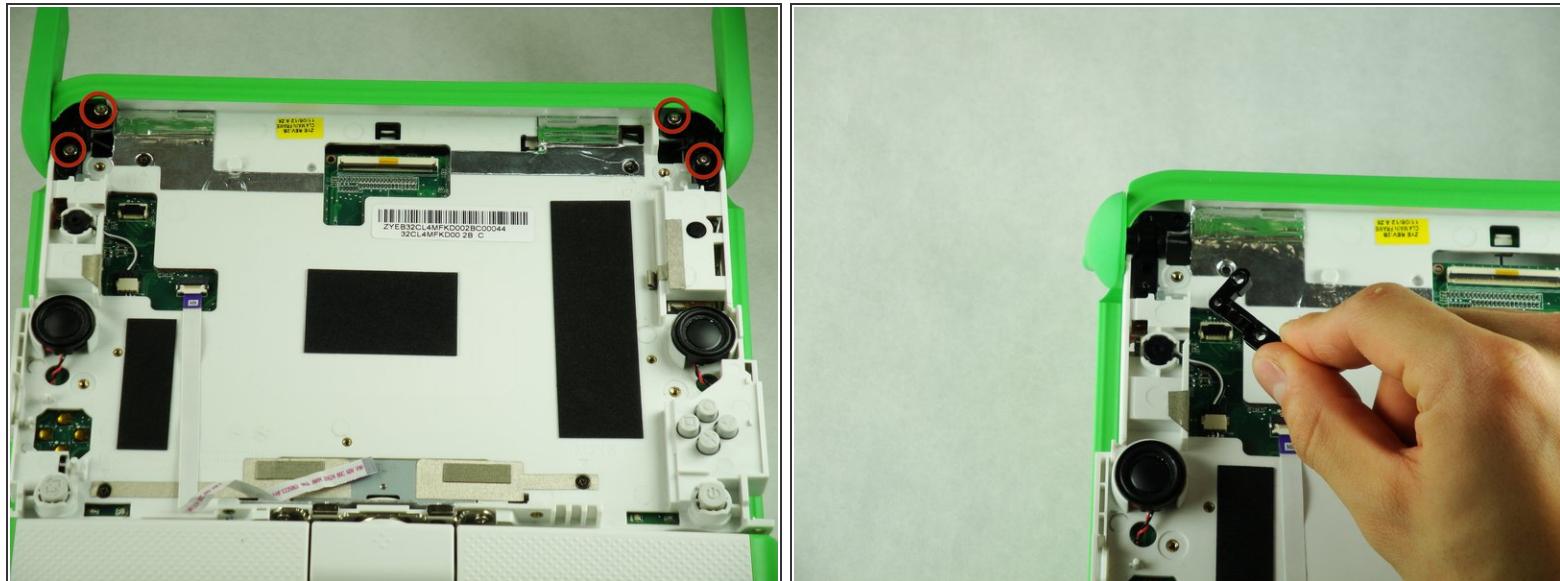

- Flip the top part of the laptop over so that you are looking at the front.
- Unscrew the two 12.7mm Phillips #1 screws on each antenna ear clamp.
- Remove the two outer clamps.

Step 17

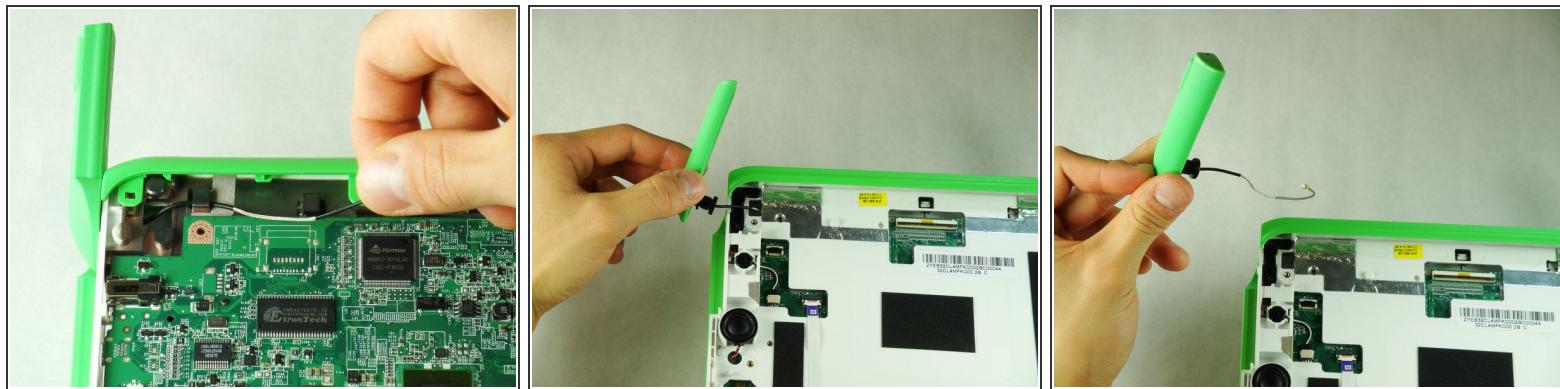

- Remove the antenna wires from the black tabs.
- On the front side of the laptop, carefully pull the wire through the hole and out.
- Remove the antenna from the laptop.

To reassemble your device, follow these instructions in reverse order.