




# Ozeri Pronto ZK14-S LCD Motherboard Replacement

Replace the LCD Motherboard to view the weight readings on the device.

Written By: Oneika White

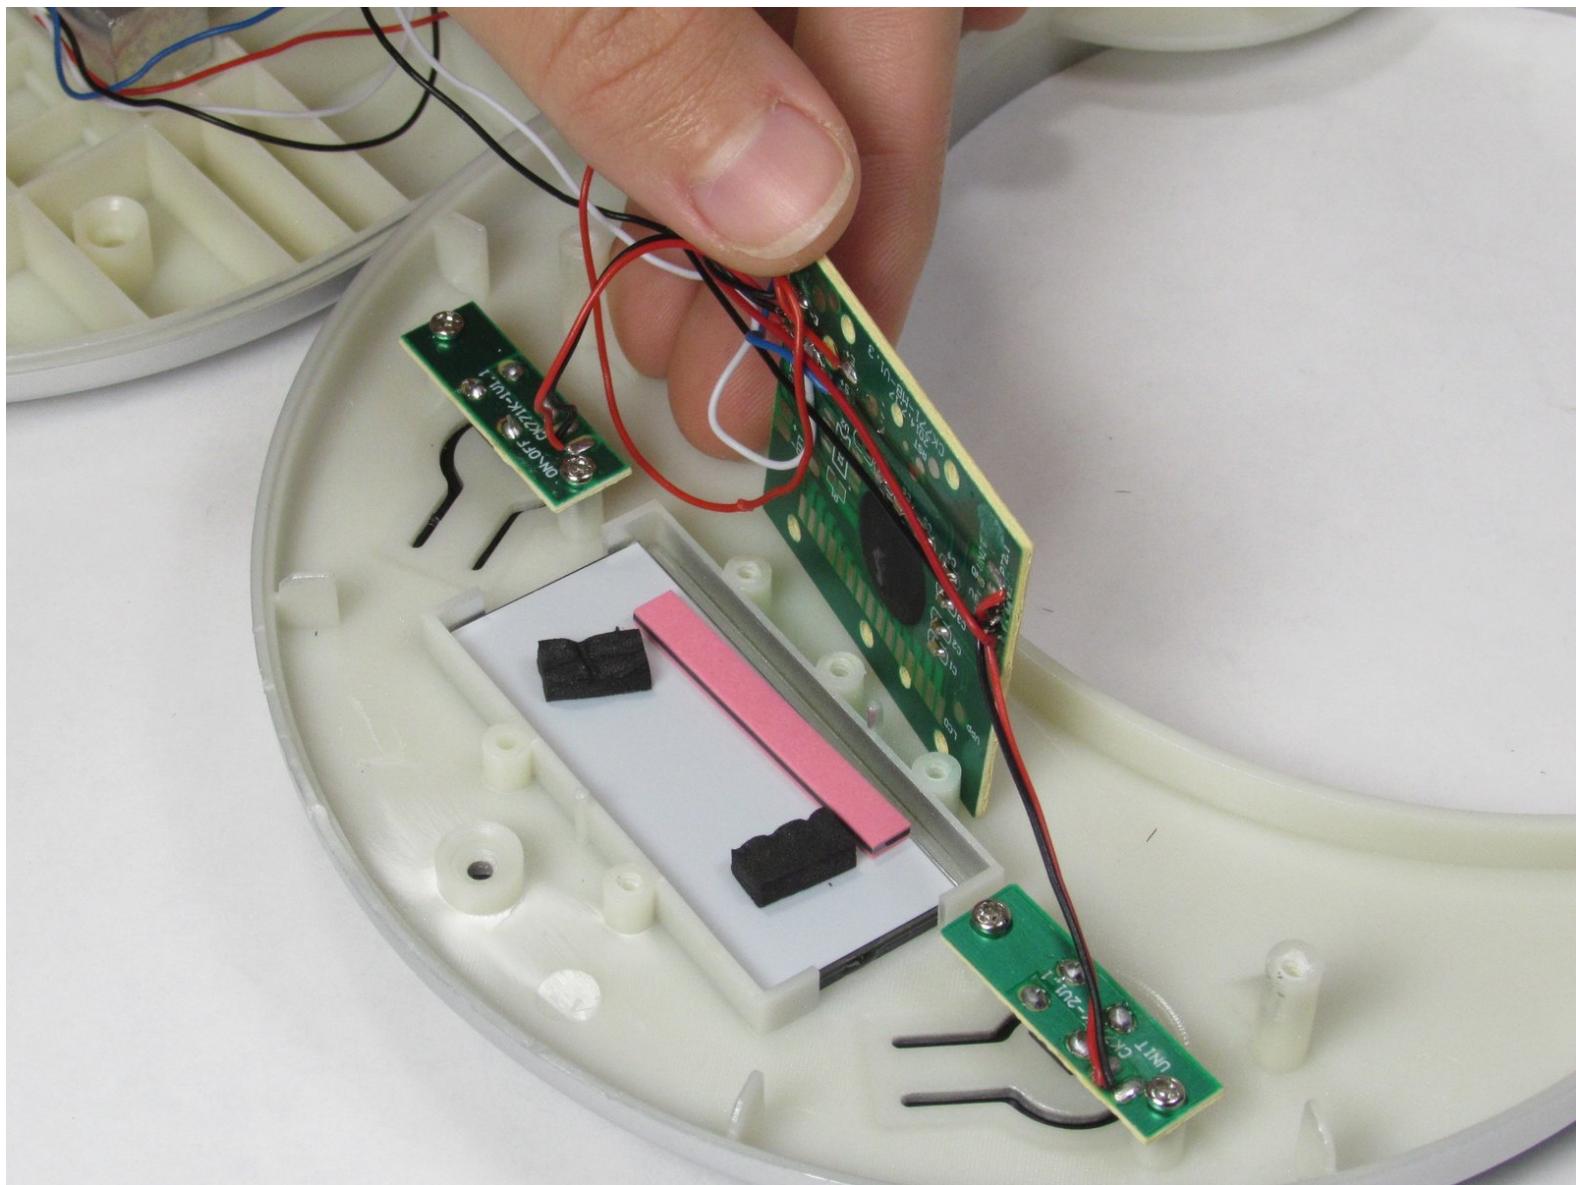

## INTRODUCTION

This guide explains how to expose, detach, and remove the LCD motherboard of the Ozeri Pronto ZK14-S. Assistance may be necessary if you do not feel confident about using the iOpener. A soldering iron will be necessary to remove the wires from the motherboard. Please view the following link for detailed instructions on how to operate a soldering iron: [How To Solder and Desolder Connections](#)

### TOOLS:

- 2.0 Flathead screwdriver (1)
- iOpener (1)

## Step 1 — Panel Removal



- Twist the plastic plate slowly to the left to pull it away.

## Step 2



- Pry off the sticker at the bottom where the “Ozeri” logo is to reveal a screw. The sticker does not need to be completely removed for the next step.

## Step 3





- Using the 2.0 Flathead screwdriver, remove the 9.50 mm Phillips head screw under the sticker.

## Step 4



- Using the 2.0 Flathead screwdriver, remove the two 18.76 mm Phillips head screws in the plate stand.

## Step 5

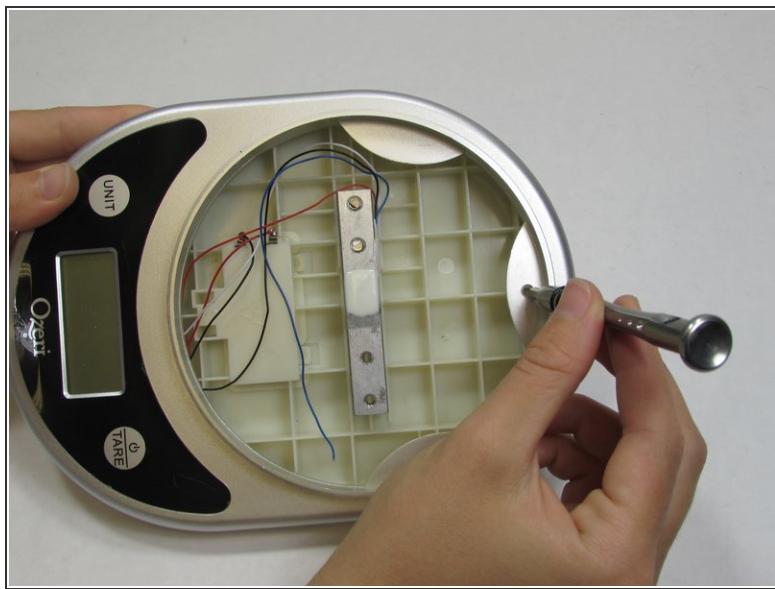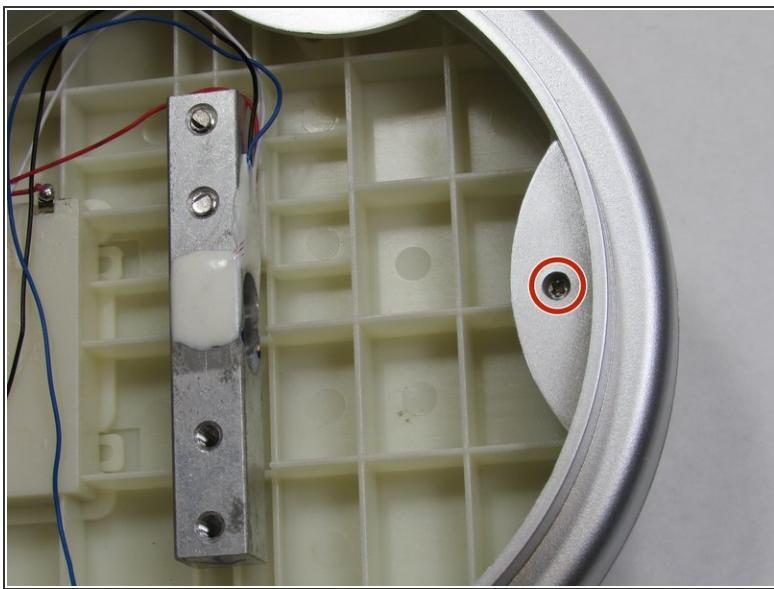

- Using the 2.0 Flathead screwdriver, remove the 9.44 mm Phillips head screw on the end opposite of the LCD screen.

## Step 6



- Turn the device over so the back panel is facing up.

## Step 7




- Using the plastic opening tool, pry off each of the two rubber stubs on the right side and the two stubs on the left side of bottom of the device.

## Step 8



- Using the 2.0 Flathead screwdriver, remove of the four 9.46 mm Phillips head screws under the removed stubs.


## Step 9

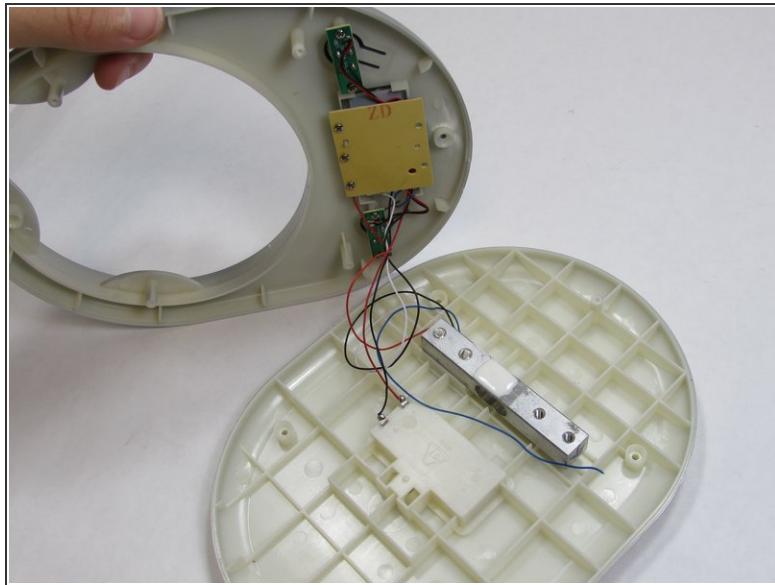

- Pry apart the two panels to separate them from each other.
- Flip the device over so the LCD is facing up. Flip the front panel over on its side.


**⚠** Be careful when separating the panels to avoid damaging the wires they are connected by.

## Step 10 — LCD Motherboard

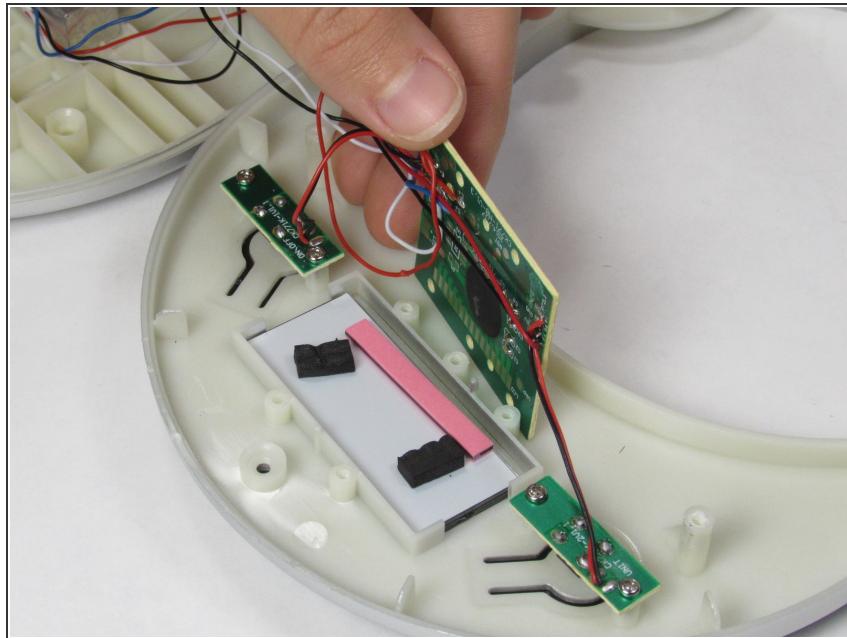

- Stand the center motherboard up.  
⚠ Be careful when standing up the LCD motherboard to avoid damaging the wires it is connected to.

## Step 11

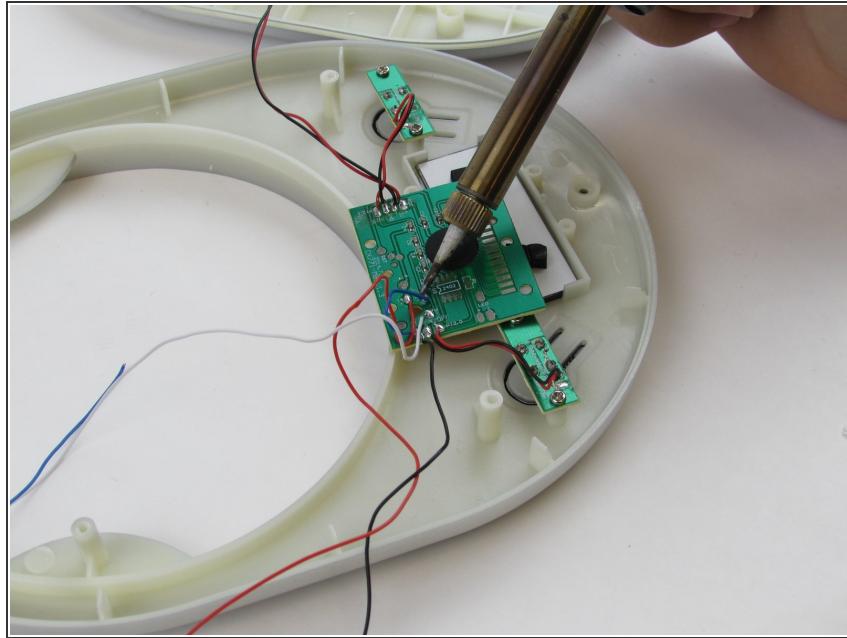

- Unsolder the posts to remove the wires  
 ⓘ Repeat this step to remove the other two motherboards

To reassemble your device, follow these instructions in reverse order.