



Removing Bottom of iMac G4 15" 700 MHz EMC 1873

Removing the white bottom of the the base, giving us access to the components inside.

Written By: Elliot Freerks



INTRODUCTION

We will unscrew the bottom faceplate, then remove the base to access the internal components.

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [T15 Torx Screwdriver](#) (1)

Step 1 — Outer Base Plate



(i) Place the computer monitor face down on a safe, harmless surface.


- Using a Phillips #00 screw driver, remove the four 6.86 mm screws from the metal plate.

Step 2




- Remove the metal plate from bottom of the iMac G4.
- (i)* The four screws do not completely separate from the metal plate.

Step 3 — RAM DIMM

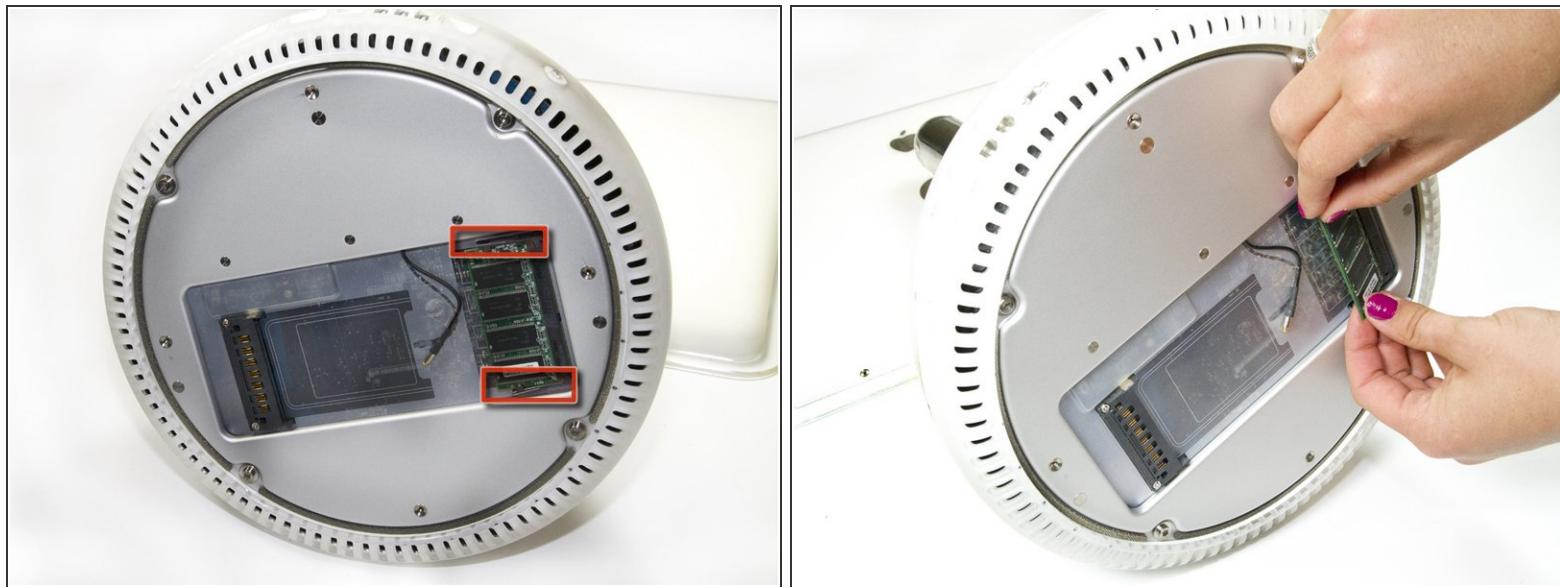

- Release the tabs on each side of the module by simultaneously pushing each tab away from the RAM.
- *(i)* These tabs lock the module in place and releasing them will cause the module to "pop" up.
- Remove the RAM module from the iMac.

Step 4 — AirPort Card

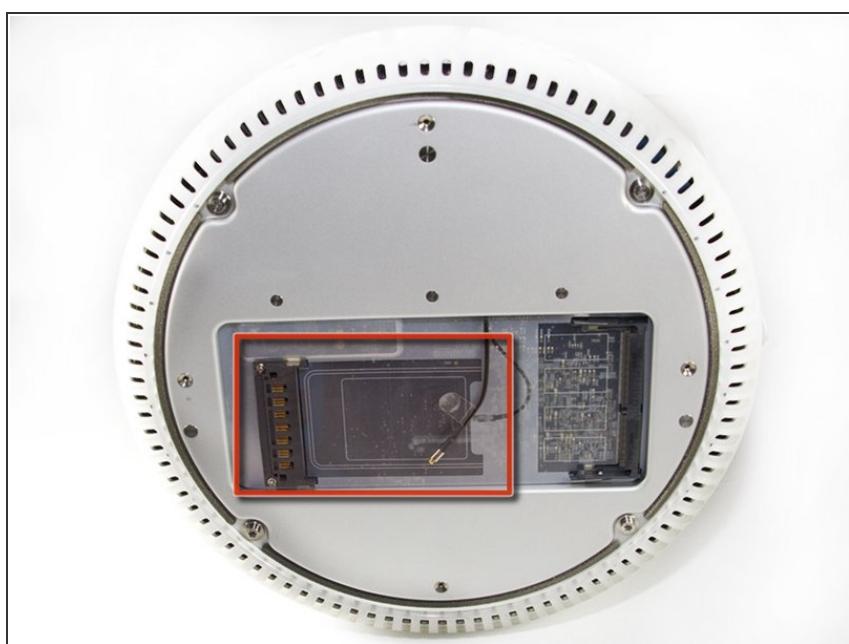

- Use a spudger to lift and remove the AirPort's antenna connector.
- *(i)* This step is only applicable to iMacs that came with an AirPort card installed.

Step 5 — Removing the Lower Case



- Remove the four 28.07mm Torx #15 screws from the lower case.


Step 6



- Open the base by carefully pulling straight off, do not rotate the cover.


⚠ Open slowly to ensure that no cables are damaged or disconnected.

Step 7

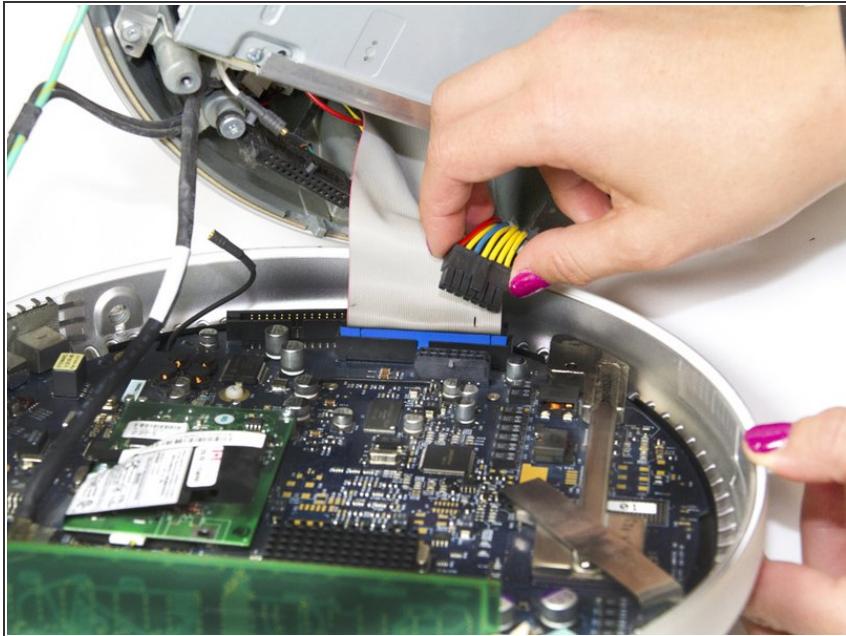

- Squeeze the small black tab and wiggle gently to remove the colored power cable.
- ⚠** Do not pull directly on the colored wires.
- i** Do not remove black grounding wire.

Step 8

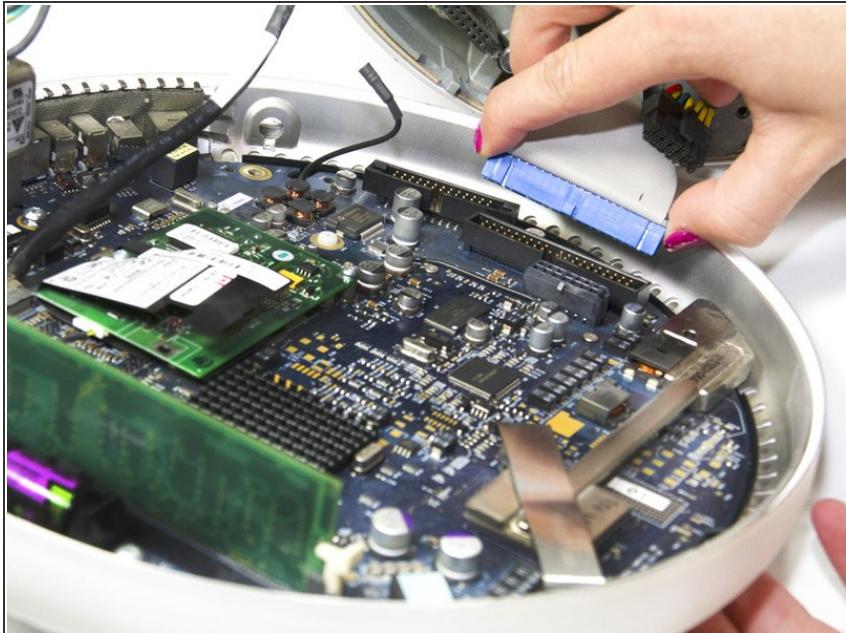

- Grab both sides of the blue connector and firmly pull to remove it from the mother board.
- ⚠** Do not pull directly on the ribbon cable.

To reassemble your device, follow these instructions in reverse order.