




Texas Instruments TI-30 XS Multiview Screen Replacement

This guide will show you how to replace the screen on the TI-30 XS Multiview.

Written By: Taylor Lamb

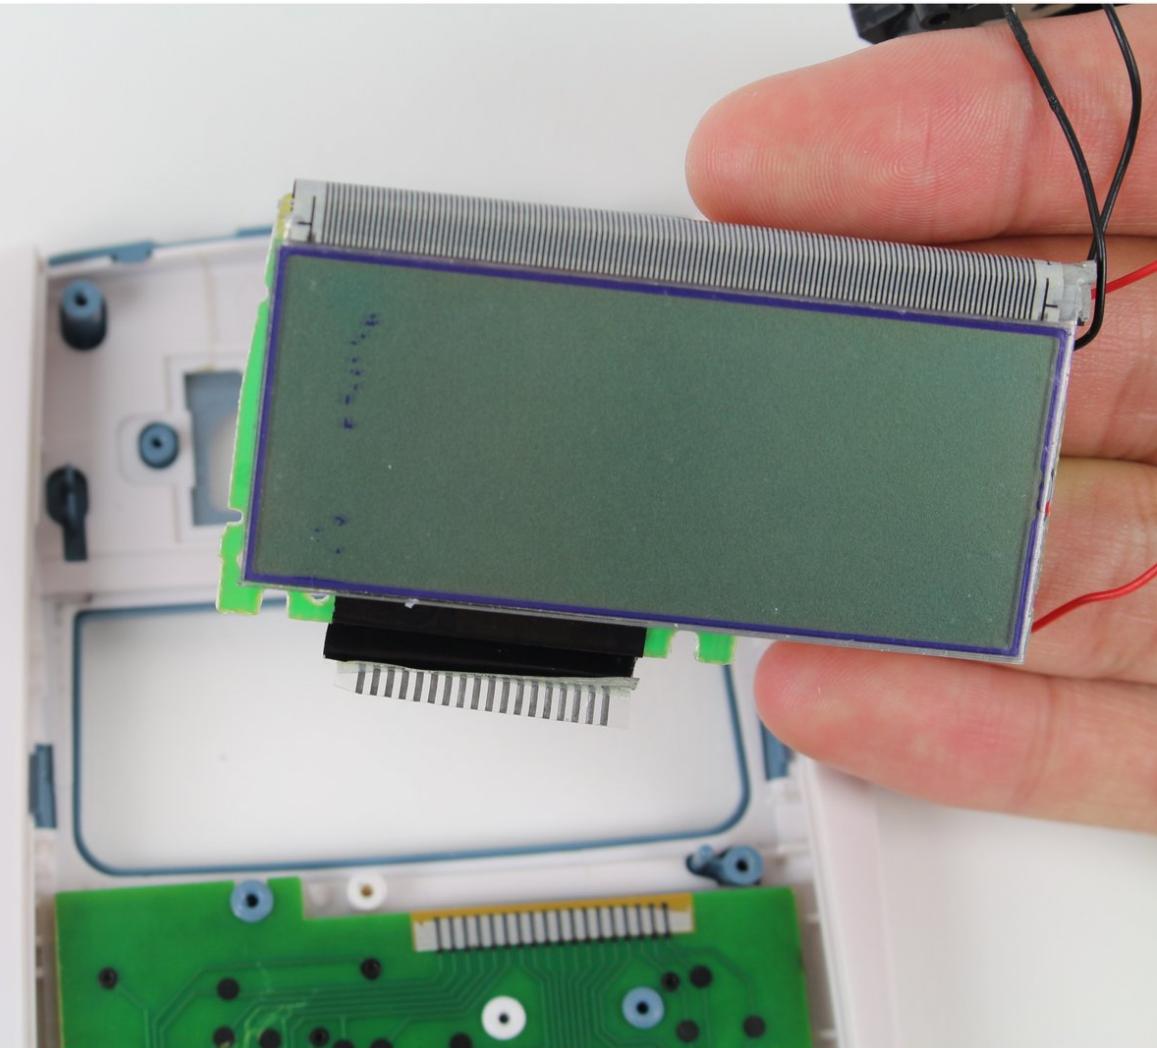

INTRODUCTION

This guide will require a new calculator, as well as some soldering. If you're not sure how to solder, see iFixit's [soldering guide](#).

TOOLS:

- [Phillips #00 Screwdriver](#) (1)
- [Spudger](#) (1)
- [Soldering Iron](#) (1)


Step 1 — Open the device



⚠ If the screw is not turning, do not force it. This can strip the screw. See the [How to Remove a Stripped Screw](#) guide if the screw is already stripped.


- Using the #00 screwdriver, unscrew the six, 6mm Phillips screws.
- Use the spudger to pry into the space between the blue back cover and the white body to take off the back cover.

Step 2 — Open the battery compartment

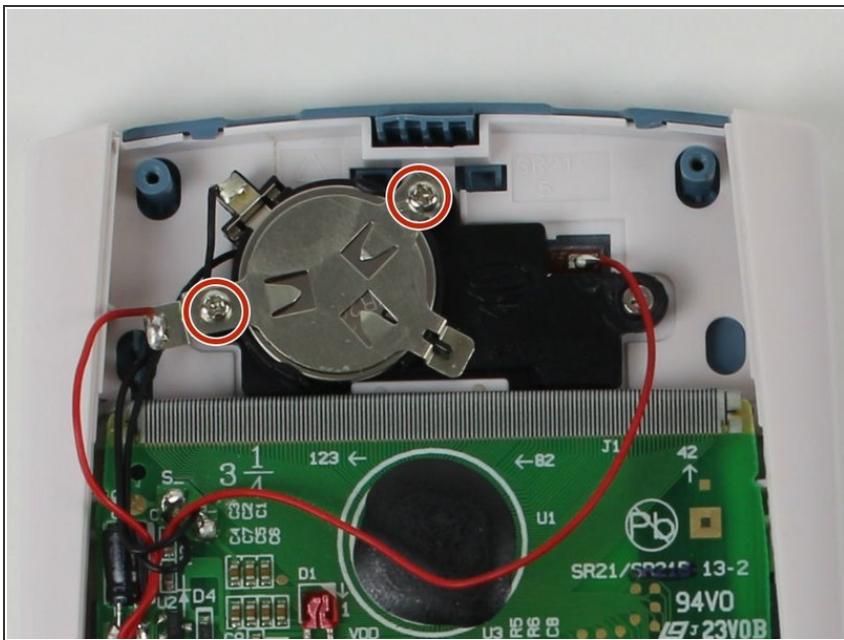

- Using the #00 Phillips screwdriver unscrew the two, 3mm Phillips screws located near the top of the calculator.
- Lift the metal plate from the battery and set it to the side.

Step 3 — Eject the battery

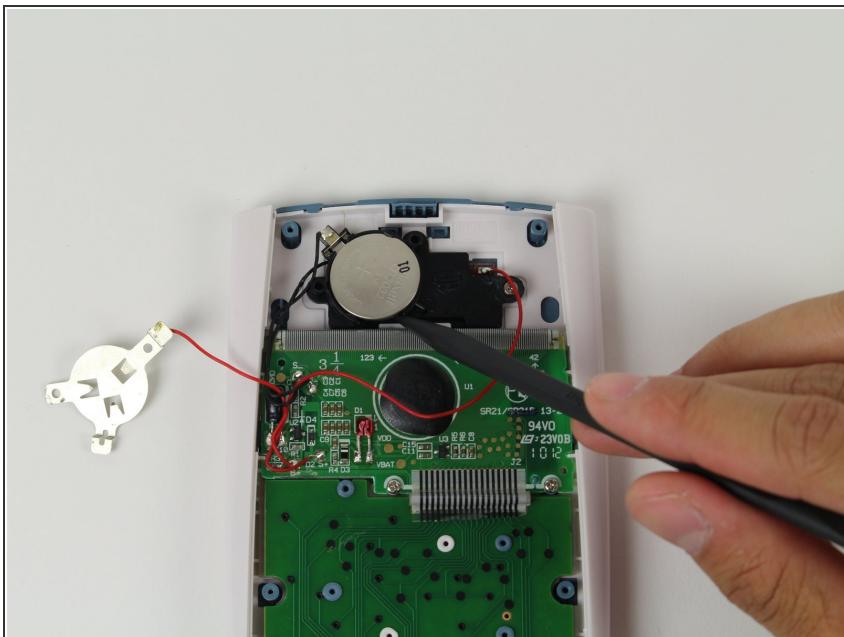


- Use the spudger to lift the battery up from the black holder.

Step 4 — Finish up




- Put the new CR2032 battery in. **Never** insert a different type of battery!
- Reverse the steps 2 and 1.

Step 5 — Free the screen

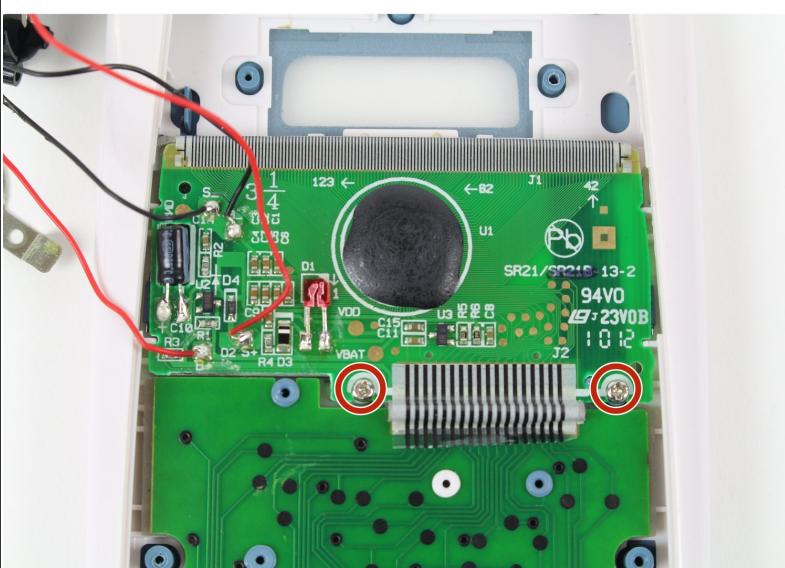

- Using the Phillips #00 screwdriver, carefully remove the two 3mm screws holding the screen in place.


Step 6 — Carefully eject the screen

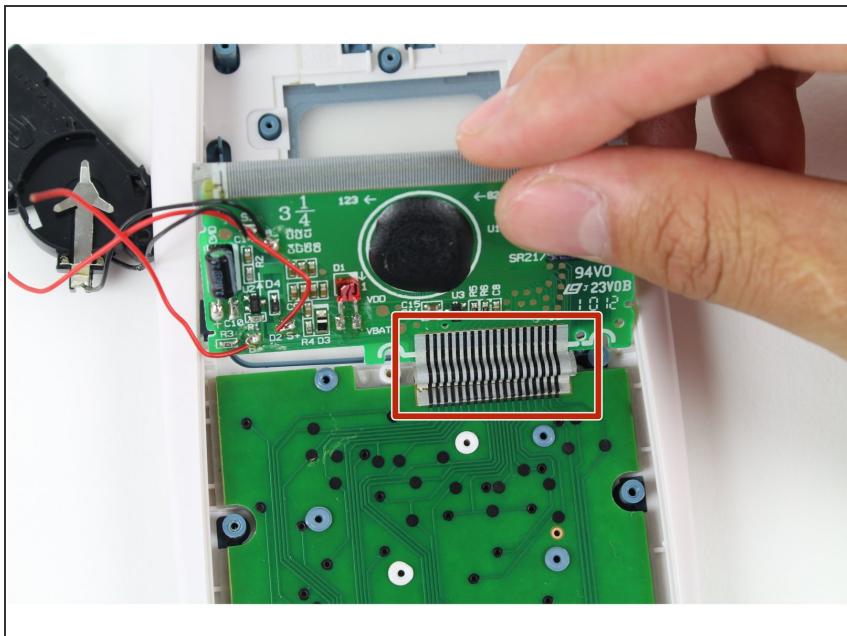

i Be sure to pull the ribbon cable, so that it only disconnects from the larger green board.

- Gently lift the screen up from the front of the calculator, carefully disconnecting the ribbon cable from the larger green board.

Step 7 — Finish up

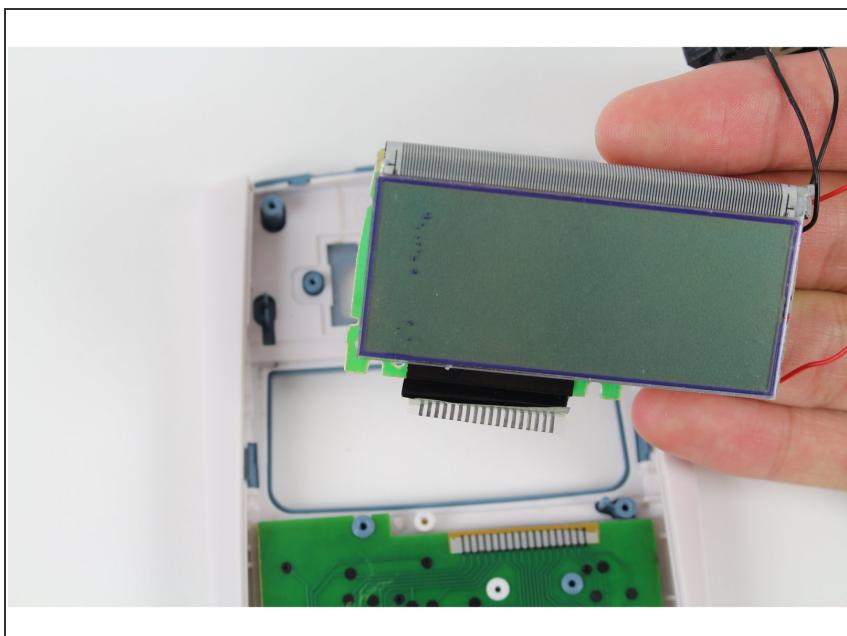

Once the screen has been removed, it should still have all connecting wires and the ribbon cable attached to it.

📌 After the screen is replaced, you will have to re-solder the ribbon cable to the motherboard.

To reassemble your device, follow these instructions in reverse order.