



iDea USA CT702 Microphone Replacement

This guide demonstrates the steps to replace the microphone in order to maximizes the potential of the iDea USA CT702.

Written By: Benton Gray



INTRODUCTION

Plug your soldering iron in on the highest setting for later steps. This is a easy to intermediate level guide that requires a knowledge of soldering.

TOOLS:

- [Soldering Workstation \(1\)](#)

PARTS:

- [Solder \(1\)](#)

Step 1 — Microphone



- Place the tablet face up with portholes facing you.

Step 2




- Use a fingernail, or a plastic opening tool to gently pry the black panel around the portholes.
- *i* Be gentle and take your time. Excessive force could damage the device.

Step 3




- Use your fingers to pry the rest of the back off; slowly apply pressure from each side to break each clip connection.

Step 4

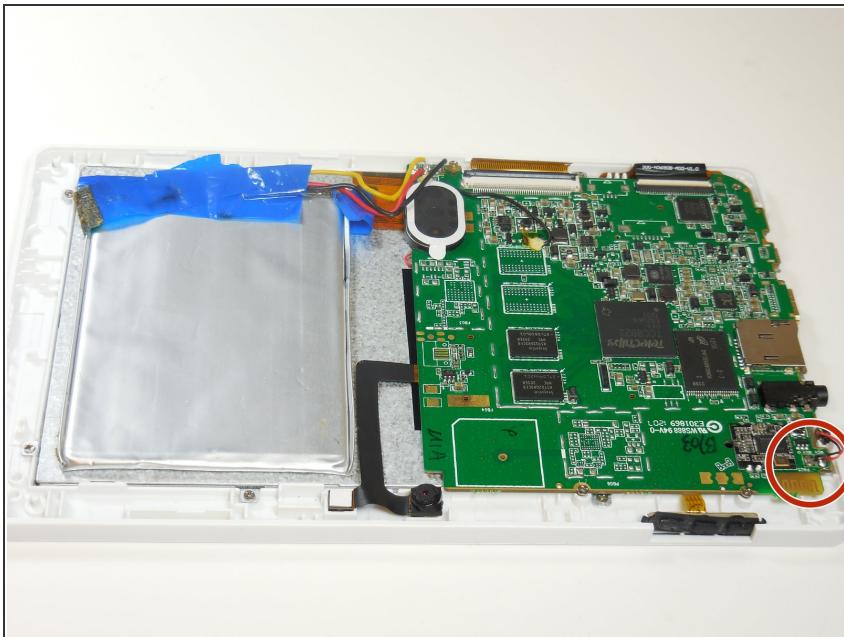

- Once the back is off, position the tablet as shown and be sure to warm your soldering iron.


Step 5

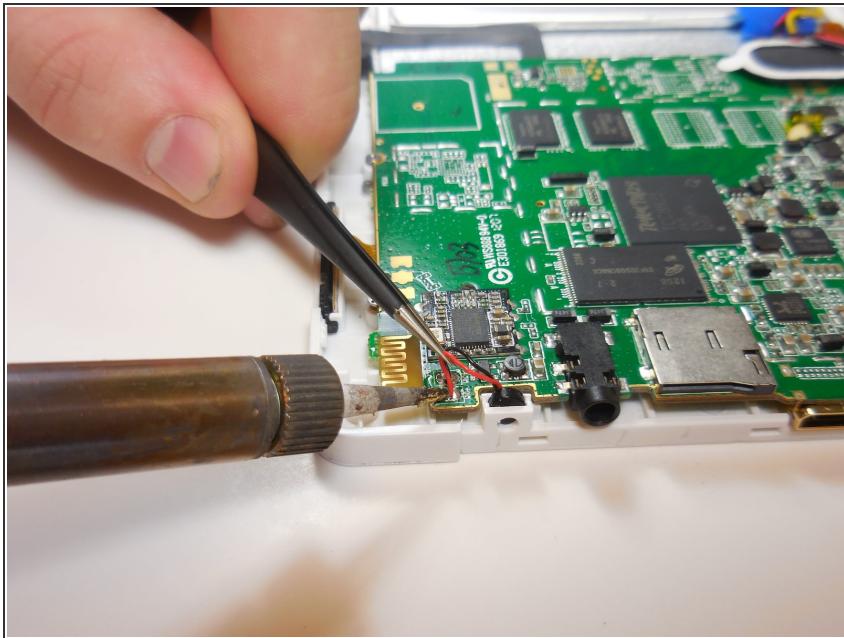

- Place tip of the soldering iron on the end of the wire to break connection.

 Remember to use proper safety precautions when soldering.

Step 6

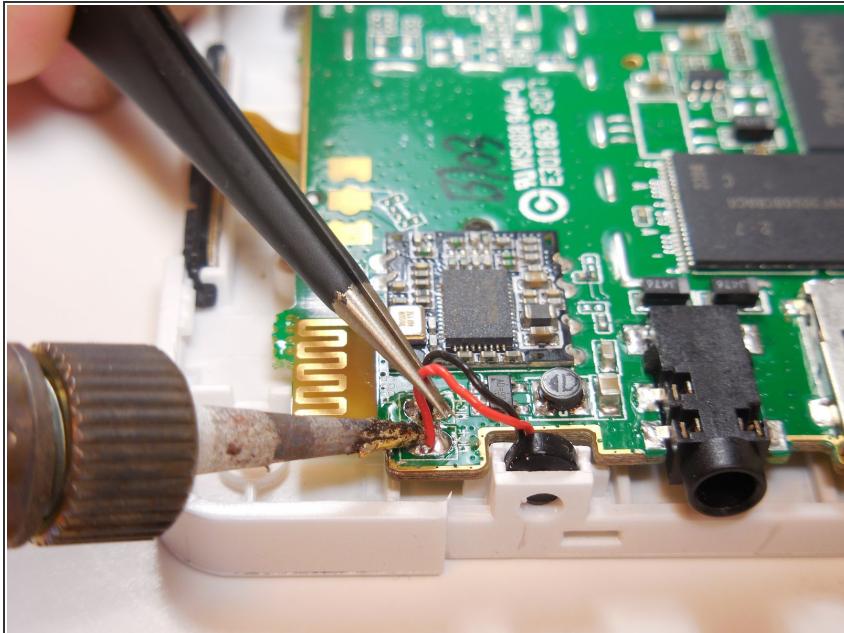

- Grip the new microphone with tweezers and place in the slot.
- Solder the new connections while using tweezers to hold the speaker steady.

To reassemble your device, follow these instructions in reverse order.