

STORING LADDER BLOCKS

1. GENERAL

1.01 This appendix describes an optional method of storing ladder blocks on the underside of the bottom step of rolling ladders.

1.02 It is reissued to:

- Include the appropriate legend on Page 1 in accordance with AT&Ts "Guidelines and Procedures for Safeguarding Information" and Pacific Company's System Instruction (SI) 178.

Note: Marginal arrows used to denote changes are omitted.

2. APPARATUS

2.01 Connect the following apparatus to all rolling ladders:

- 1 holder
- 2 FH plated machine screws, $\frac{1}{4}$ " by 20", 1 $\frac{1}{4}$ inches long
- 2 nuts
- 2 lockwashers

3. INSTALLATION AND MAINTENANCE

3.01 The rear of the holder shall be flush with the rear underside of the bottom step of the ladder. Center the holder and attach it with $\frac{1}{4}$ " by 20" FH plated machine screws, nuts, and lockwashers (see Fig. 1).

3.02 Drill and counter-sink holes so there is no obstruction on the top of the step surface.

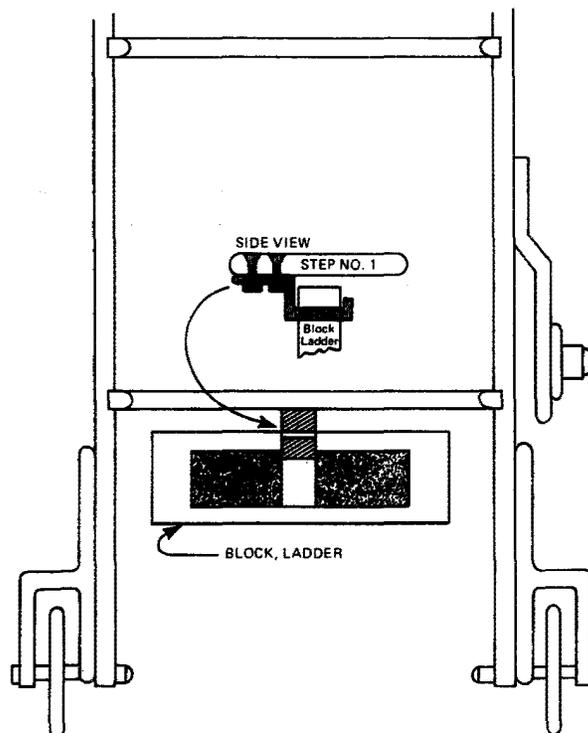


Fig. 1

NOTICE

Not for use or disclosure outside the Bell System except under written agreement

SECTION 010-110-004PT
APPENDIX 2

4. ORDERING INFORMATION

Note: Holders may also be manufactured locally.

4.01 Address all requests for orders to:

Bell Metal Fabricators
2500 Adeline St.
Oakland, CA 94607

4.02 Holders are to be made of cadmium plated
 $\frac{1}{8}$ -inch by 1-inch stock (see Fig. 2).

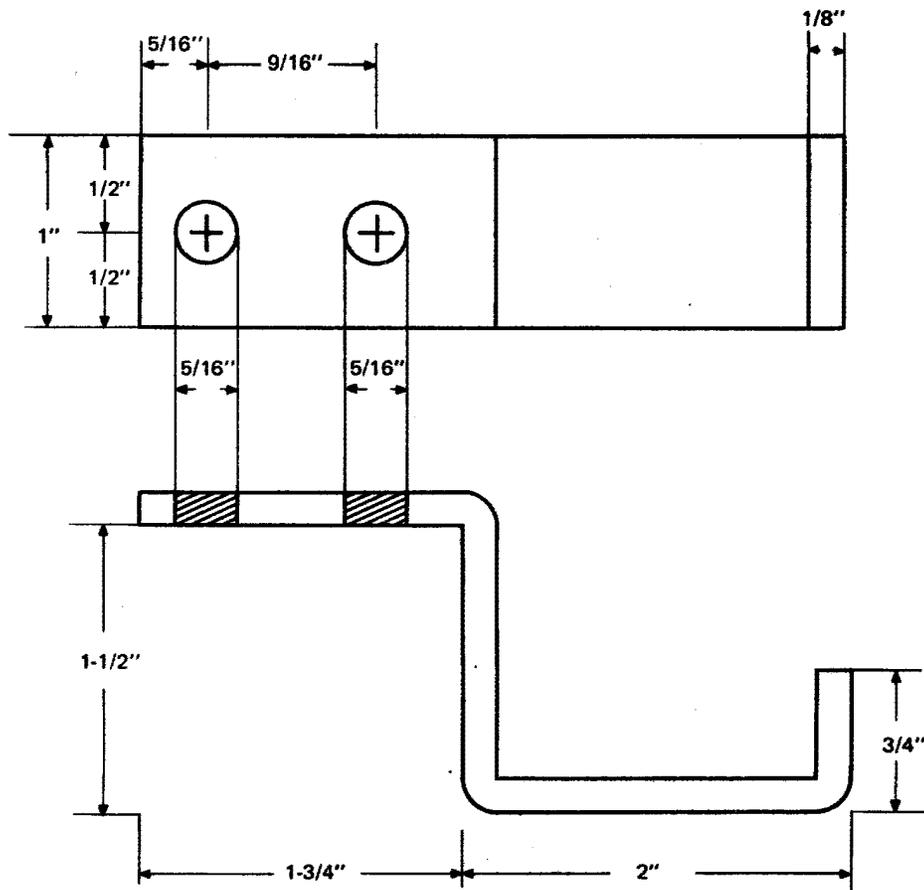


Fig. 2