

**PATCHING CORD ASSEMBLIES**  
**3-CONDUCTOR CORDS**  
**P3A THROUGH P3W**  
**DESCRIPTION**

**1. GENERAL**

**1.01** This section lists and illustrates the P3A through P3W 3-conductor cords.

**1.02** This section is reissued to:

- Update the format
- Rate the P3W cord Mfr Disc.


Revision arrows are used to emphasize the more significant changes. The Equipment Test List is not affected.

**1.03** For general information on these cords, refer to Section 032-313-100.

**2. DESCRIPTION OF CORDS**

**P3A**

3 feet long

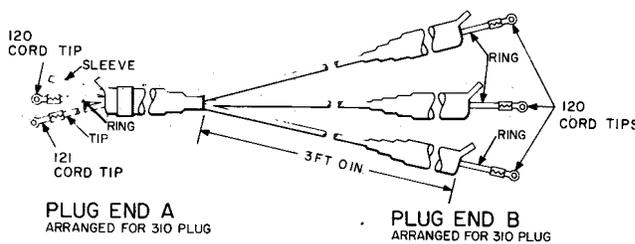


Res 0.21  $\Omega$ /ft

The P3A cord includes four 120 cord tips and one 121 cord tip. The cord was initially intended for use in emergency plugging-up to make a line busy.

**P3D**

9 inches, 3, 6, or 8 feet long in slate color or 8 feet in red-green (Unless otherwise specified, the 6-foot slate cord will be furnished.)

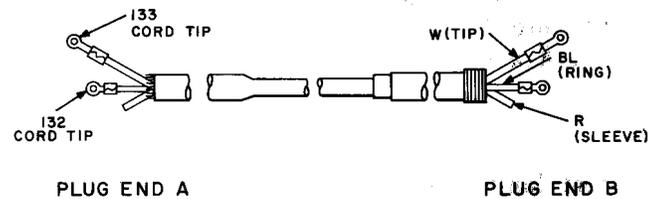


Res 0.18  $\Omega$ /ft

The P3D cord includes two 132 cord tips and two 133 cord tips. Both ends are arranged for a 309 plug.

**P3E**

1 foot, 2, 3, 4, 6, 8, 10, 12, 15, 20, and 25 feet long in slate or 8 feet in green. (Unless otherwise specified, the 6-foot slate cord will be furnished.)

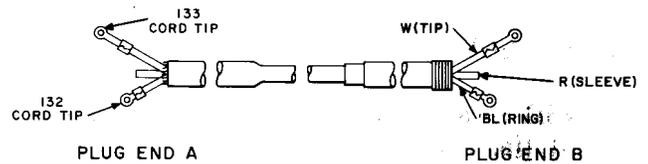

Res 0.18  $\Omega$ /ft

The P3E cord includes two 132 cord tips and two 133 cord tips. Both ends are arranged for 291B, 310, 257A and B, and 248A plugs.


**NOTICE**

Not for use or disclosure outside the  
Bell System except under written agreement

**SECTION 032-313-108**

**P3F**

2, 4, 6, and 8 feet long in slate, red, black, or green. The 8-foot, red-green cord is also available. (Unless otherwise specified, the 8-foot slate cord will be furnished.)

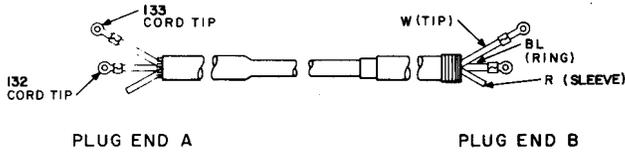


Res 0.18  $\Omega$ /ft

The P3F cord includes two 132 cord tips and two 133 cord tips. Arranged for a 309 plug at plug end A and a 310 plug at plug end B.

**P3H**

10 feet long (When specified in the order, 5, 6, 7, and 8 feet, 8 feet 6 inches, and 9 feet 6 inches long can also be obtained.)

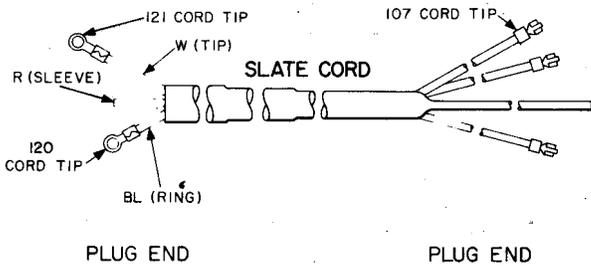


Res 0.21  $\Omega$ /ft

The P3H cord includes one 120 cord tip, one 121 cord tip, and three 107 cord tips. Arranged for a 310 and D-5773 plugs or a 310-and 240-type plugs. When ordered equipped with the A.E. Company D-5773 plug, the white conductor will be connected to the inside spring and the blue conductor to the outside spring on the side of the plug on which the heads of the clamping screws appear.

**P3J**

3 feet long (When specified in the order, 1-, 2-, 4-, and 6-foot cords can also be obtained.)

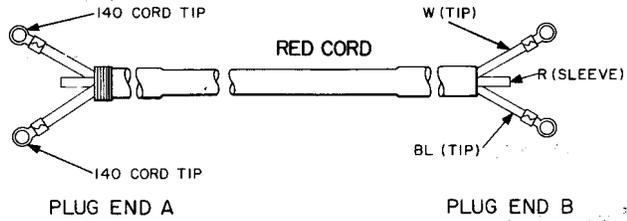


Res 0.18  $\Omega$ /ft

The P3J cord includes four 140 cord tips. Both ends are arranged for the 241-type plugs.

**P3K**

12 feet long (When specified, 6-foot cords will be furnished.)

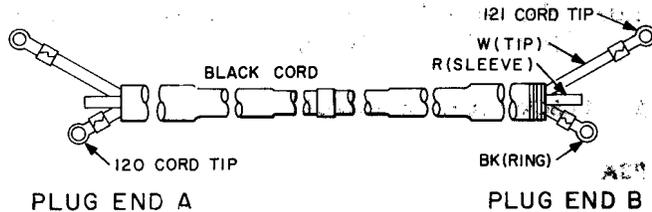


Res 0.01  $\Omega$ /ft

The P3K cord includes two 120 cord tips and two 121 cord tips. Both ends are arranged for the 310 plugs.

**P3L**

12 feet long. (When specified, 6-foot cords will be furnished.)

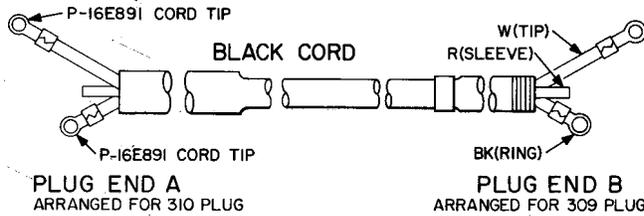


Res 0.017  $\Omega$ /ft

The P3L cord includes four P-16E891 cord tips.

**P3N**

3 feet long (When specified, 6-, 15-, and 20-foot lengths can also be obtained.)

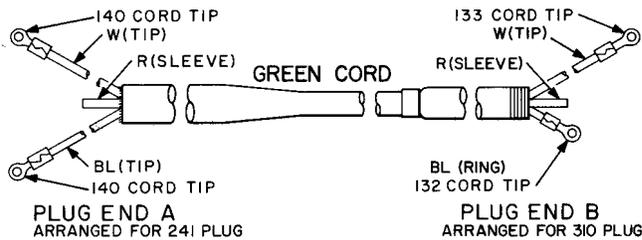


Res 0.18  $\Omega$ /ft

The P3N cord includes one 132 cord tip, one 133 cord tip, and two 140 cord tips. The cord was initially intended for use on the No. 4, 5, and 16 toll testboards and No. 9 telegraph testboard.

**P3P**

6 feet long (When specified, 2-, 4-, 8-, 10-, and 12-foot cords can also be obtained.)

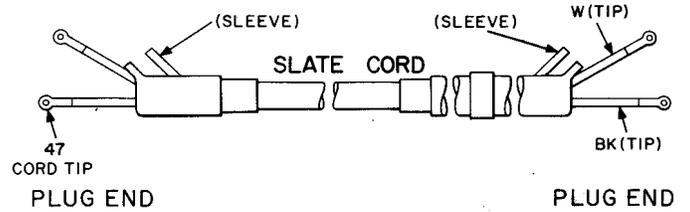


Res 0.006  $\Omega$ /ft

The P3P cord includes four 47 cord tips. The cord was initially intended for use as a patching cord in the K carrier telephone circuits. Both ends are arranged for the 305 plugs.

**P3R**

19 feet 6 inches long

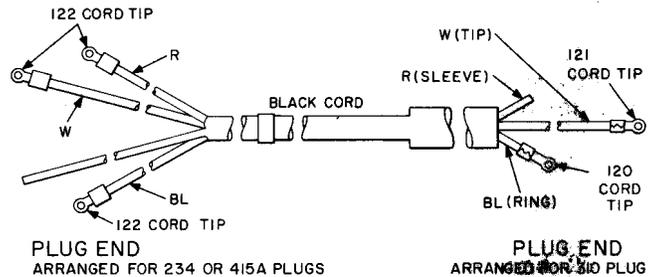


Res 0.21  $\Omega$ /ft

The P3R cord includes one 120 cord tip, one 121 cord tip, and three 122 cord tips. The cord was initially intended for use on manual switchboards in answering the time recorder circuit.

**SECTION 032-313-108**

**P3S**

19 feet 6 inches long

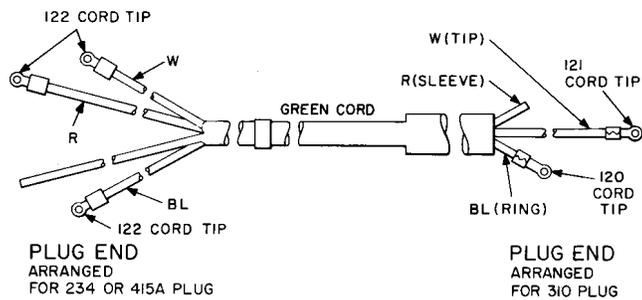


Res 0.21  $\Omega$ /ft

The P3S cord includes one 120 cord tip, one 121 cord tip, and three 122 cord tips. The cord was initially intended for use on manual switchboards in answering the time recorder circuit.

**P3U**

7 feet long (When specified, the 19-foot 6-inch length can also be obtained.)

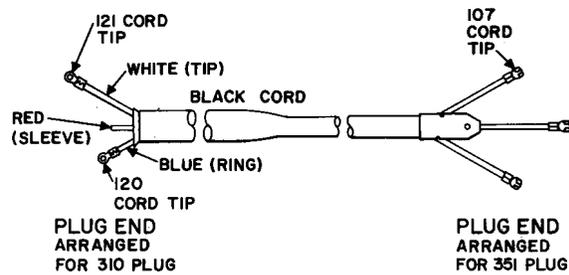

Res 0.21  $\Omega$ /ft

The P3U cord includes one 120 cord tip, one 121 cord tip, and three 107 cord tips.

▶P3W — MFR DISC.

No replacement.⚡