

**PATCHING CORD ASSEMBLIES**  
**4-CONDUCTOR CORDS**  
**4P1A THROUGH 4P24A**  
**DESCRIPTION**

**1. GENERAL**

**1.01** This section lists and illustrates the 4P1A through 4P24A 4-conductor cords.

**1.02** This section is reissued to:

- Update the format
- Add the 4P3B and 4P3C cords
- Rate the 4P8A, 4P8B, 4P17D and 4P21A cords Mfr Disc.

Revision arrows are used to emphasize the more significant changes. The Equipment Test List is not affected.

**1.03** For general information on these cords, refer to Section 032-314-100.

**2. DESCRIPTION OF CORDS**

**4P1A—MFR DISC.**


Replaced by the 4P18A cord.

**4P2A—MFR DISC.**

Replaced by the 5P3A cord.

**4P3A**

1 P4H cord, 6 feet long, equipped with:  
2 288A plugs

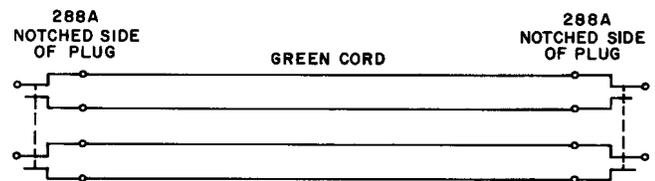


**4P3B**

1 P4H cord, 4 feet long, equipped with:  
2 327B plugs

**4P3C**

1 P4H cord, 6 feet long, equipped with:  
2 327B plugs




**NOTICE**

Not for use or disclosure outside the  
Bell System except under written agreement

**SECTION 032-314-102**


**4P4A**

- 1 P4BB cord, 12 feet long, equipped with:
  - 1 464C plug
  - 1 240B plug

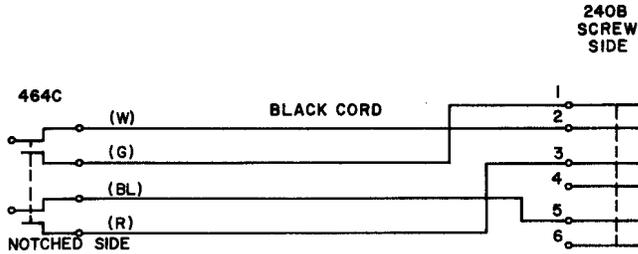


**4P4B**

- 1 P4BB cord, 12 feet long, equipped with:
  - 1 464C plug
  - 1 240B plug

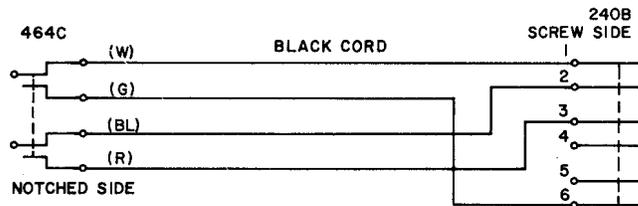


**4P5A**

- 1 P4BB cord, 12 feet long, equipped with:
  - 1 464C plug
  - 1 240C plug

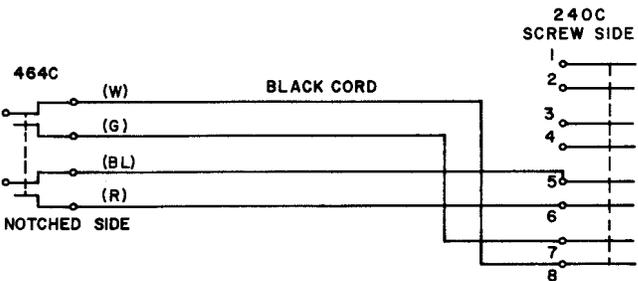


**4P6A**

- 1 P4BC cord, 19 feet 6 inches long, equipped with:
  - 1 464C plug
  - 1 234 plug

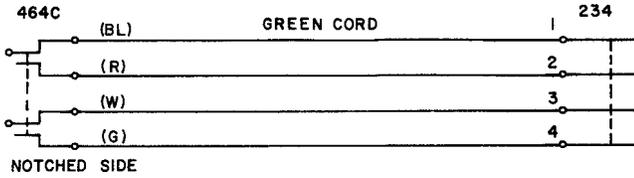

**4P7A**

- 1 P4BC cord, 19 feet 6 inches long, equipped with:
  - 1 464C plug
  - 1 235 plug

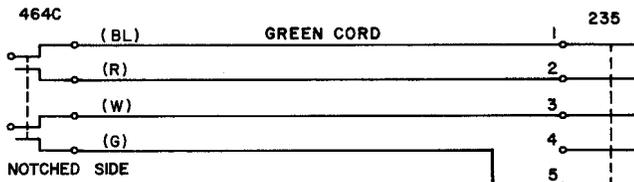

**4P8A—MFR DISC.**


Replaced by the 4P18A.

**4P8B—MFR DISC.**

Replaced by 4P18B.⚡

**4P9A**

- 1 P4BE cord, 19 feet 6 inches long, equipped with:
  - 1 464C plug
  - 1 234 plug

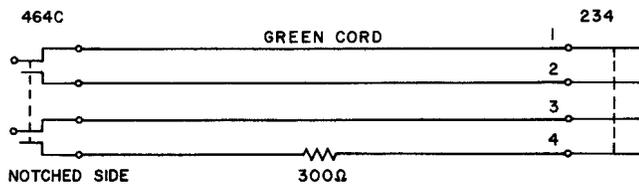

**4P10A—MFR DISC.**

Replaced by the 4P19A cord.

**4P11A—MFR DISC.**

Replaced by the 4P14A cord.

**4P12A—MFR DISC.**

Replaced by the 4P16A cord.


**4P13A—MFR DISC.**

Replaced by the 4P15A cord.

**4P14A**

1 P4Y cord, 7 feet long, equipped with:

- 1 309 plug
- 1 310 plug
- 1 351A plug

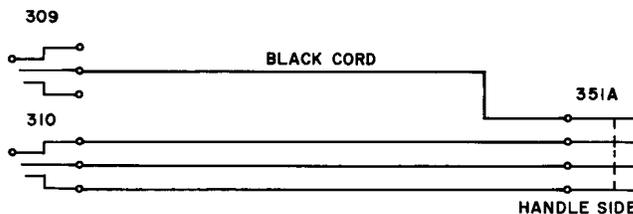

Res 0.16 Ω/ft


P-15A417 cord holders furnished when specified.

Replaces the 4P11A cord.

**4P15A**

1 P4BH cord, 7 feet long, equipped with:

- 1 464B plug
- 1 351B plug

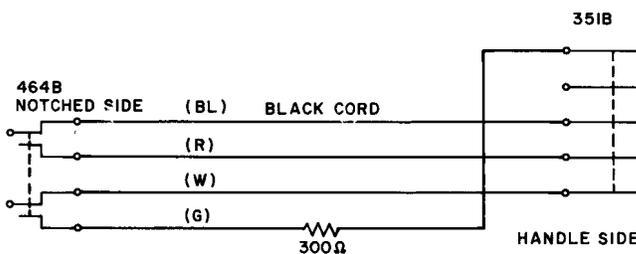


P-15A417 cord holders furnished when specified.

Replaces the 4P13A cord.

**4P16A**

1 P4BH cord, 7 feet long, equipped with:

- 1 464B plug
- 1 351A plug

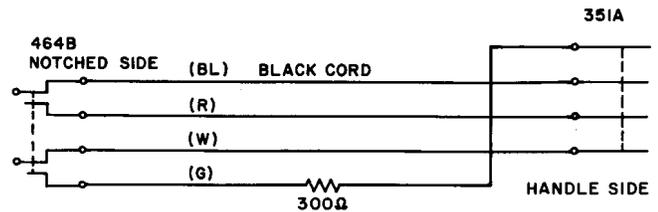


P-15A417 cord holders furnished when specified.

Replaces the 4P12A cord.

**4P17A**

1 P4S cord, 4 feet long, equipped with:

- 2 315A plugs

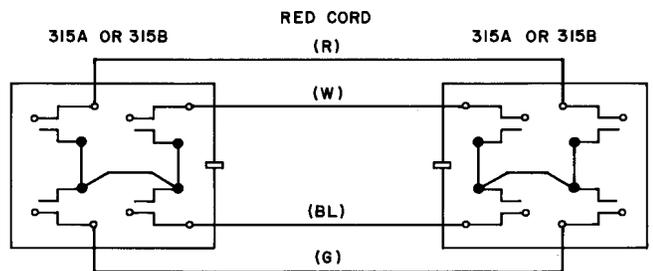

**4P17B**

1 P4S cord, 6 feet long, equipped with:

- 2 315A plugs

**4P17C**

1 P4S cord, 10 feet long, equipped with:

- 2 315A plugs


**4P17D—MFR DISC.**

No replacement.

**SECTION 032-314-102**

**4P18A**

1 P4BG slate cord, 2 feet long, equipped with:  
2 464C plugs

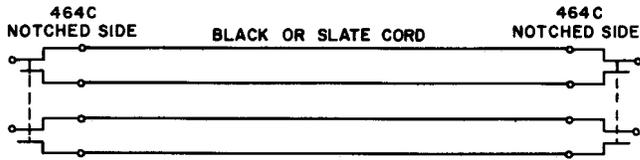

Replaces the 4P1A cord.

**4P18B**

1 P4BG slate cord, 4 feet long, equipped with:  
2 464C plugs

Replaces the 4P1B cord.

**4P18C**

1 P4BG slate cord, 6 feet long, equipped with:  
2 464C plugs

Replaces the 4P1C cord.


**4P18D**

1 P4BG black cord, 6 feet long, equipped with:  
2 464A plugs

Replaces the 4P1D cord.

**4P19A**


1 P4AR cord, 8 feet long, equipped with:  
2 428A plugs

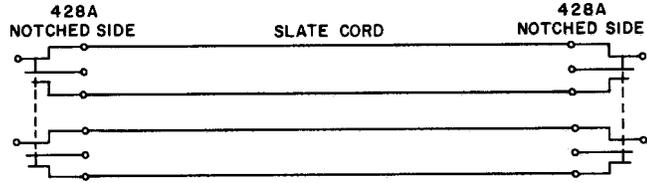

Replaces the 4P10A cord.

**4P19B**


1 P4AR cord, 5 feet long, equipped with:  
2 428A plugs

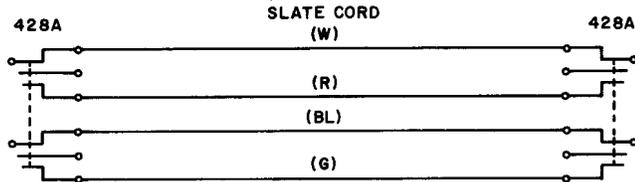

The 4P19B cord includes eight 133 cord tips.

**4P20A**

1 P4BJ cord, 7 feet long, equipped with:  
1 464B plug  
1 351E plug

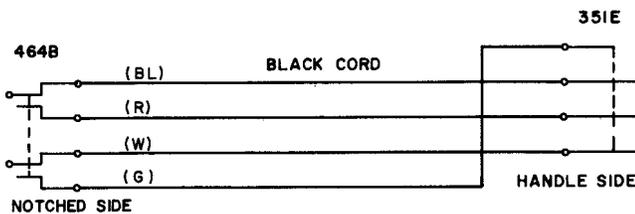


P-15A417 cord holders furnished when specified.

◆4P21A—MFR DISC.

No replacement.◆

4P22A


1 P4AE cord, 7 feet long, equipped with:  
 1 288A plug  
 1 360D plug

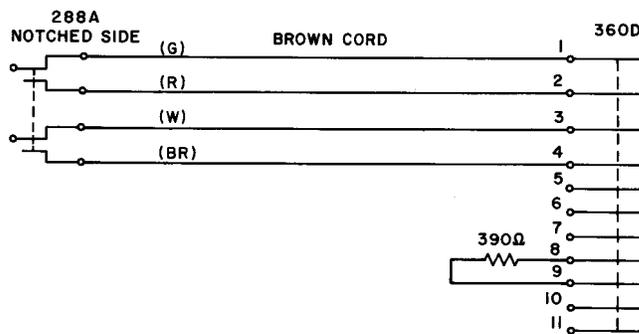

The 390 Ω resistor is part of the 360D plug.

4P23A

1 P4BF cord, 6 feet long, equipped with:  
 1 464C plug  
 2 301A plugs

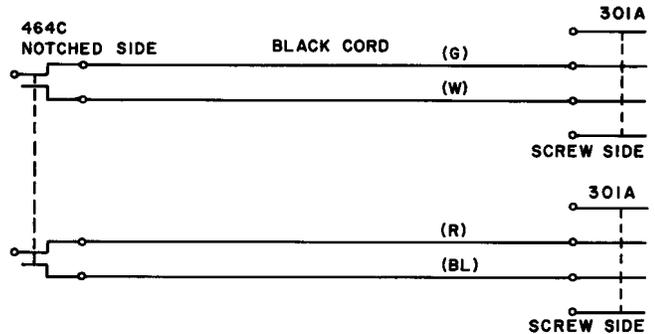


Res 0.16 Ω/ft

The cord was initially intended for use at distributing frames for patching Varley test trunks to conductors terminated on 444-type jacks.

4P24A

1 P4BC cord, 19 feet 6 inches long, equipped with:  
 1 464C plug  
 1 415A plug

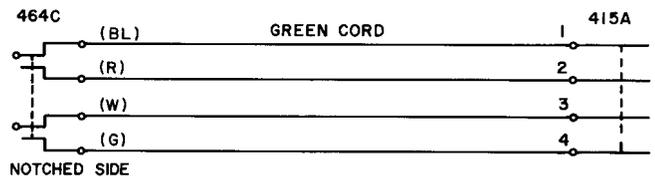

Res 0.17 Ω/ft

The cord was initially intended for use at distributing frames to patch such circuits as service observing circuits to circuits terminated on terminal strips with the cable side arranged for solderless wrapped connections.