

PATCHING CORD ASSEMBLIES
CORDS HAVING MORE THAN SIX CONDUCTORS
14P1A THROUGH 14P1K
DESCRIPTION

1. GENERAL

1.01 This section lists and illustrates the 14P1A through 14P1K cords.

1.02 This section is reissued to:

- Update the format
- Rate the 14P1C, 14P1D, and 14P1E cords Mfr Disc.


Revision arrows are used to emphasize the more significant changes. The Equipment Test List is not affected.

1.03 For general information on these cords, refer to Section 032-317-100.

2. DESCRIPTION OF CORDS

14P1A

The terminals of one plug are connected to the corresponding lettered terminals of the other plug.

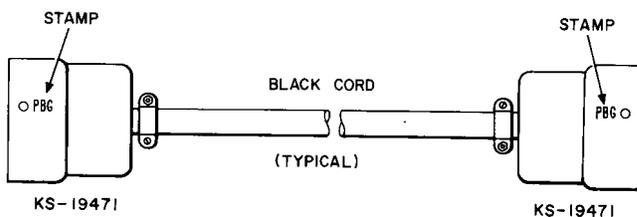

Res 0.017 Ω /ft

1 P14B cord, 4 feet 6 inches long, equipped with:
2 KS-19471, L1 plugs (each stamped PAG)

14P1B

1 P14B cord, 4 feet 6 inches long, equipped with:
2 KS-19471, L2 plugs (each stamped PBG).

Res 0.017 Ω /ft

◆ **14P1C—MFR DISC.**

No replacement.

14P1D—MFR DISC.

No replacement.

14P1E—MFR DISC.

No replacement.◆

14P1F—MFR DISC.

No replacement.

14P1G—MFR DISC.

No replacement.

14P1H—MFR DISC.

No replacement.

14P1J—MFR DISC.

No replacement.

14P1K—MFR DISC.

No replacement.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement