

## CARRYING CASE I

### DESCRIPTION

### TOOLS

#### 1. GENERAL

1.01 This section describes coded and noncoded carrying cases within the type number range of 13A through 20B, R-2513, AT-6917, and KS-5205 through KS-14131.

1.02 Revision arrows are used to emphasize significant changes. This section is reissued to rate the 17A, AT-6736, KS-5206, KS-5207, KS-5208, KS-5209, L1 through L3, and KS-8349 carrying cases Mfr Disc.

1.03 The following are carrying cases which have been rated Mfr Disc. and their replacements.

Code	Replacement
17A	—
19A	—
20A	20B
AT-6736	—
KS-5206	—
KS-5207	—
KS-5208	—
KS-5209, L1	—
KS-5209, L2	—
KS-5209, L3	—
KS-5672	—
KS-8349	—

1.04 See Tool Index, Section 074-000-001, for other carrying case practices.

#### 2. DESCRIPTION OF TOOLS

2.01 **13A:** The 13A carrying case (Fig. 1) consists of a black-finished wooden case with a hinged cover held closed by a latch. The 13A carrying case is intended for housing and carrying the 121A gauge.

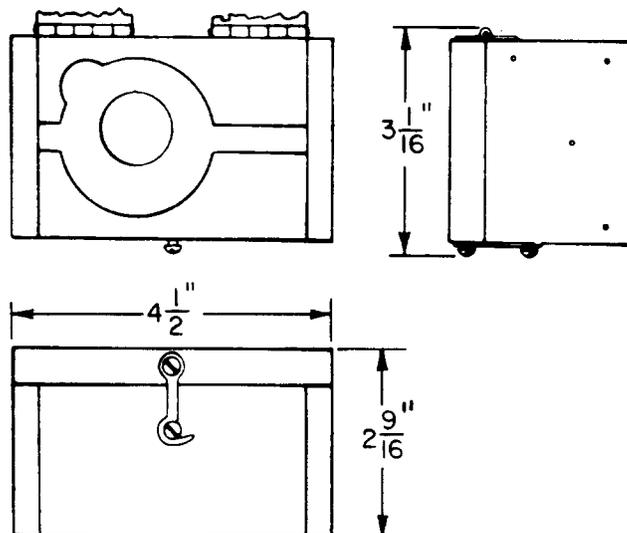


Fig. 1—13A Carrying Case

2.02 **14A:** The 14A carrying case (Fig. 2) consists of a black-finished sheet metal case with a hinged cover held closed by a latch. The case interior is divided into three compartments. The 14A carrying case is intended for housing and carrying multiple marking tools and materials.

#### NOTICE

Not for use or disclosure outside the  
Bell System except under written agreement

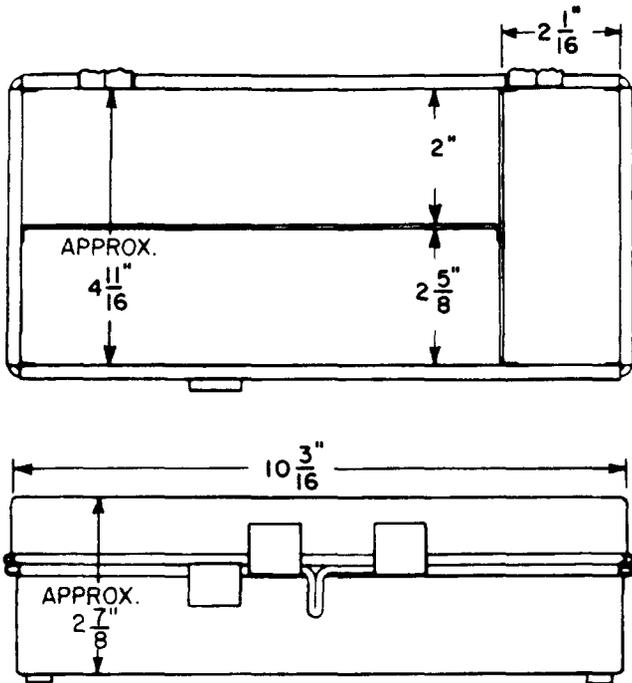


Fig. 2—14A Carrying Case

**2.03 15A:** The 15A carrying case (Fig. 3) consists of a black-finished wooden case with a hinged cover held closed by a set of latches. The 15A carrying case is part of the 1000A tool kit and used for housing the tools associated with that kit.

**2.04 16A:** The 16A carrying case (Fig. 4) consists of a black-finished wooden case with a hinged cover held closed by a set of latches. The 16A carrying case is part of the 1001A tool kit and used for housing tools and gauges associated with that tool kit.

**2.05 18A:** The 18A carrying case (Fig. 5) consists of a black-finished wooden case with a hinged cover held closed by a latch. The 18A carrying case is a part of the 1003A tool kit and used for housing the tools associated with that kit.

**2.06 20B:** The 20B carrying case (Fig. 6) consists of a gray-finished wooden case with a hinged cover held closed by a set of latches. The 20B carrying case is part of the 1014B tool kit.

**2.07 R-2513:** The R-2513 carrying case (Fig. 7) consists of a metal case finished in olive green enamel with a hinged cover held closed by a latch. The R-2513 carrying case is intended for housing and carrying tools and gauges for adjusting apparatus in the Crossbar System.

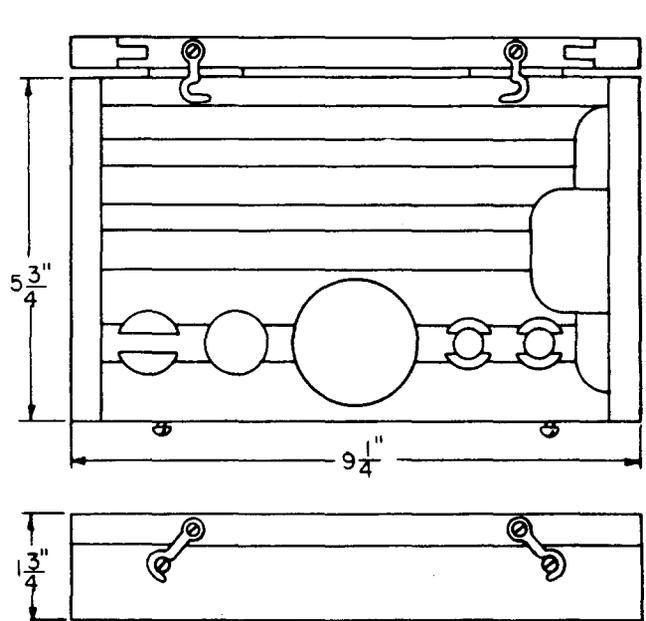


Fig. 3—15A Carrying Case

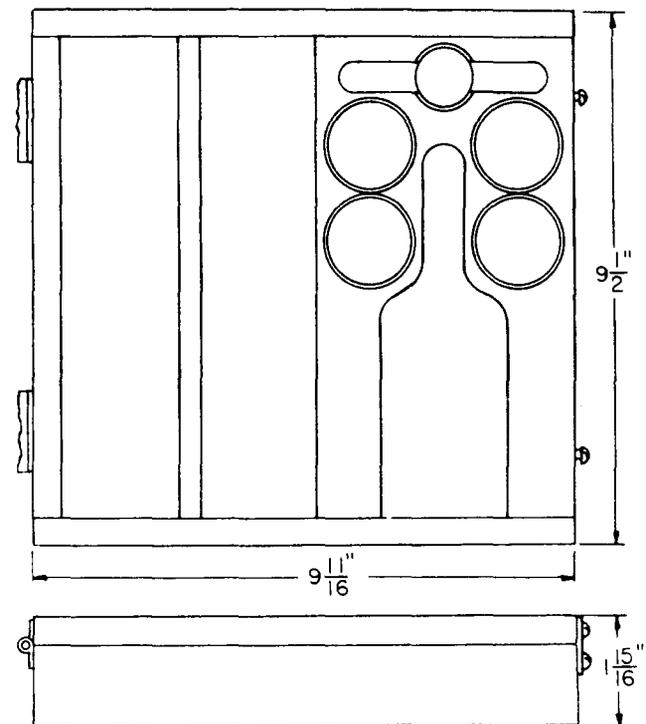


Fig. 4—16A Carrying Case

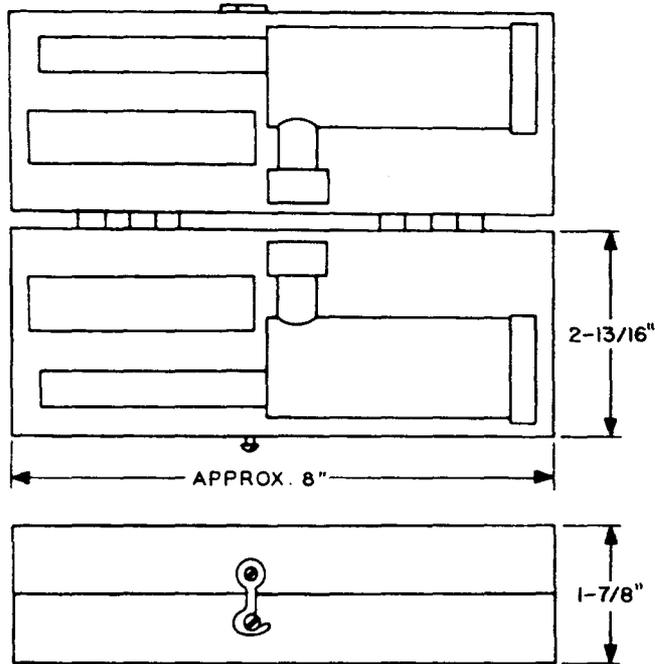


Fig. 5—18A Carrying Case

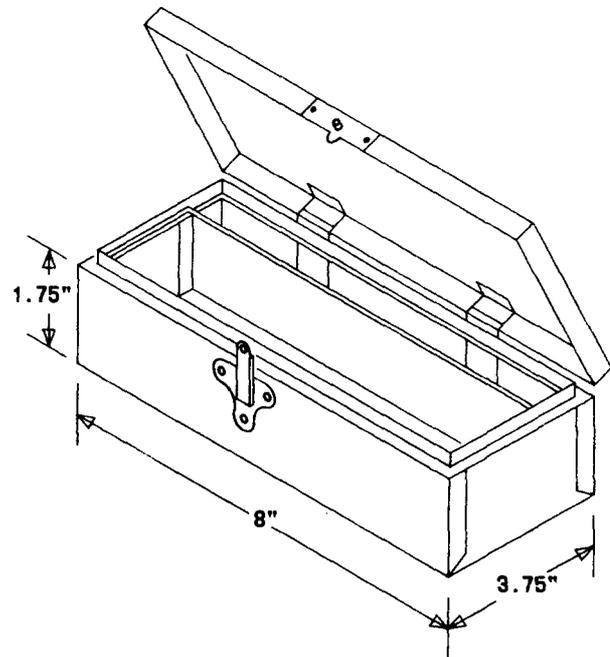


Fig. 7—R-2513 Carrying Case

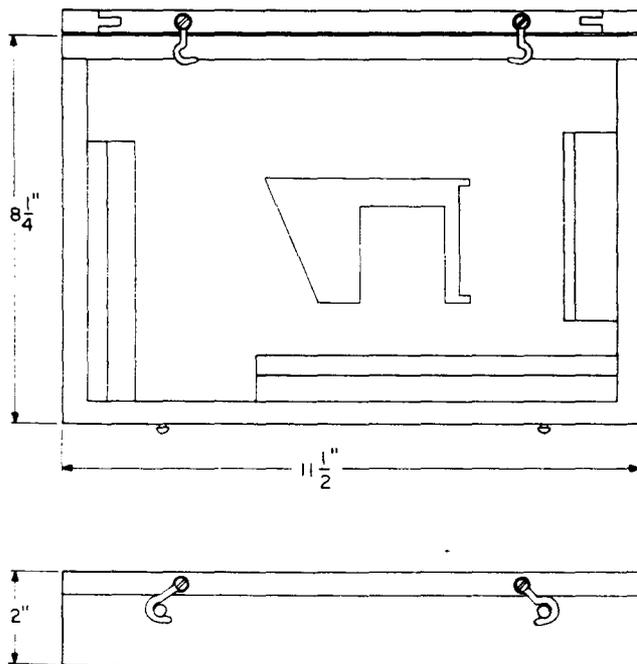


Fig. 6—20B Carrying Case

**2.08 AT-6917:** The AT-6917 carrying case (Fig 8) consists of a molded plastic case with a plastic divider to make 12 separate compartments within the case. The case has a hinged cover having a friction catch. The AT-6917 carrying case is intended for use as a container of miscellaneous small parts and materials carried principally by craftpersons.

**2.09 KS-5205:** The KS-5205 carrying case is intended for housing and carrying hand-size test sets. The case measures 5-1/2 inches high by 8 inches wide by 9-1/4 inches long and consists of black fiber trunk material riveted together with edges bound in angle fiber. All corners on the outside are protected by metal corner pieces riveted to the fiber trunk material. A hinged cover is provided and arranged for fastening on the front by means of a lock in the center and a draw bolt catch on each side. A leather handle is furnished. The inside of the case is sufficiently padded to secure a snug fit and has a clamping effect when the cover is closed.

**2.10 KS-6526:** The KS-6526 carrying case (Fig. 9) consists of a black-finished metal case with a hinged cover held closed by a latch. The KS-6526 carrying case is intended for housing and carrying gauges for 207- and 213-type relays.

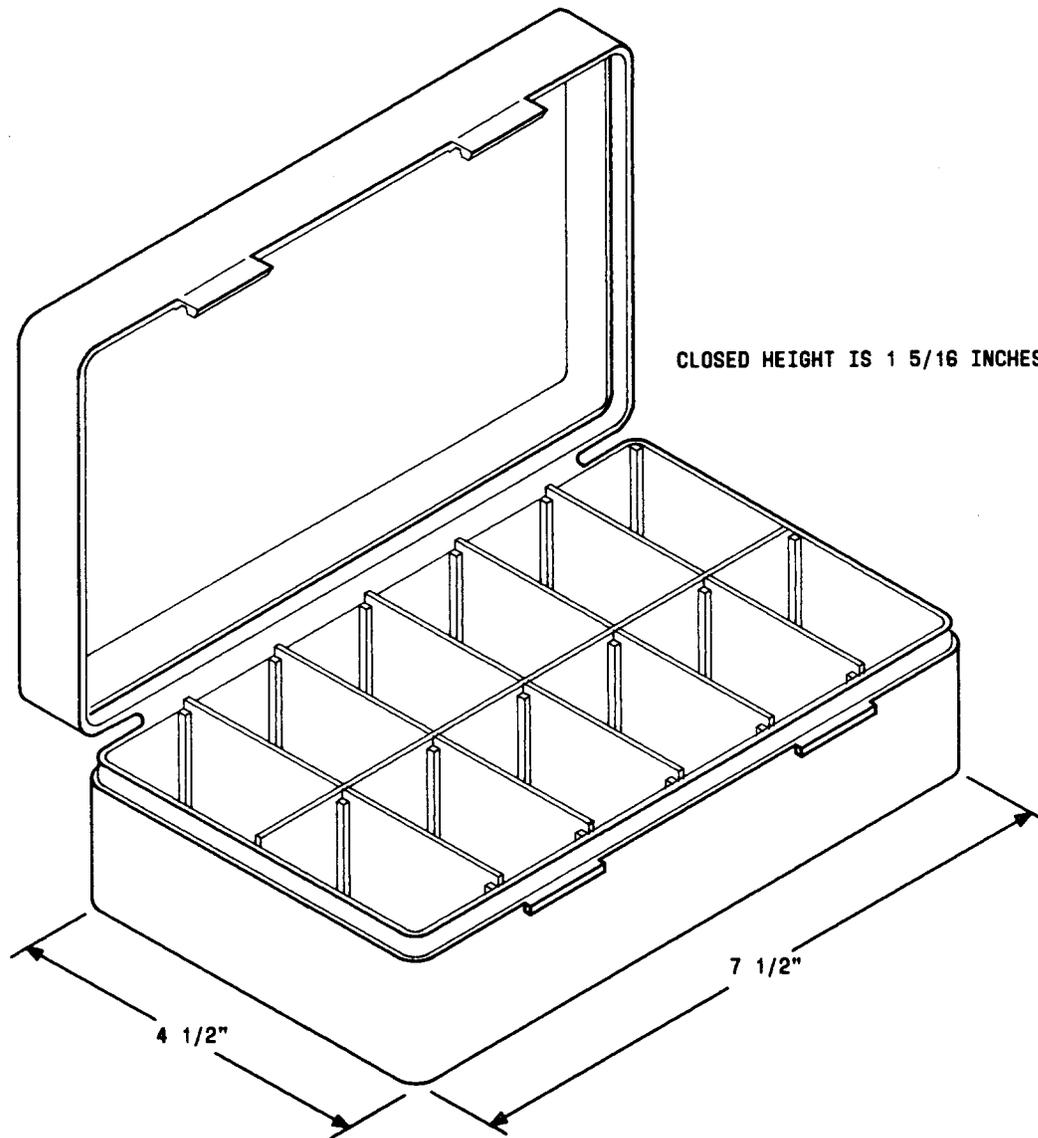


Fig. 8— AT-6917 Carrying Case

2.11 **KS-8456:** The KS-8456 carrying case (Fig. 10) is primarily intended as a carrying case for the KS-8455 volt-ohmmeter.

2.12 **KS-14131:** The KS-14131 carrying case (Fig. 11) consists of an inner case in an outer

case with shock absorbent padding between the cases. Both cases have wood frames covered with black vulcanized fiber and hinged lids. These cases are used in conjunction with the 649A pin locking tool for transporting the KS-13882 perforator between a central office and a maintenance center. The 649A pin locking tool must be ordered separately.

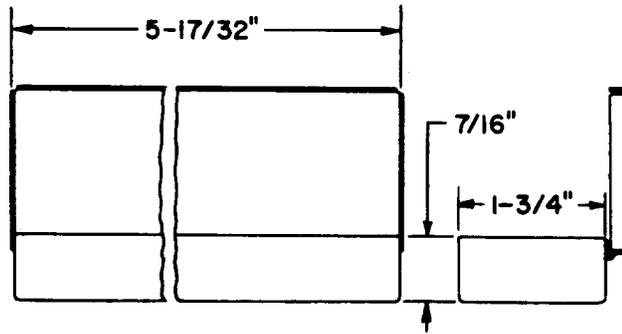


Fig. 9—KS-6526 Carrying Case

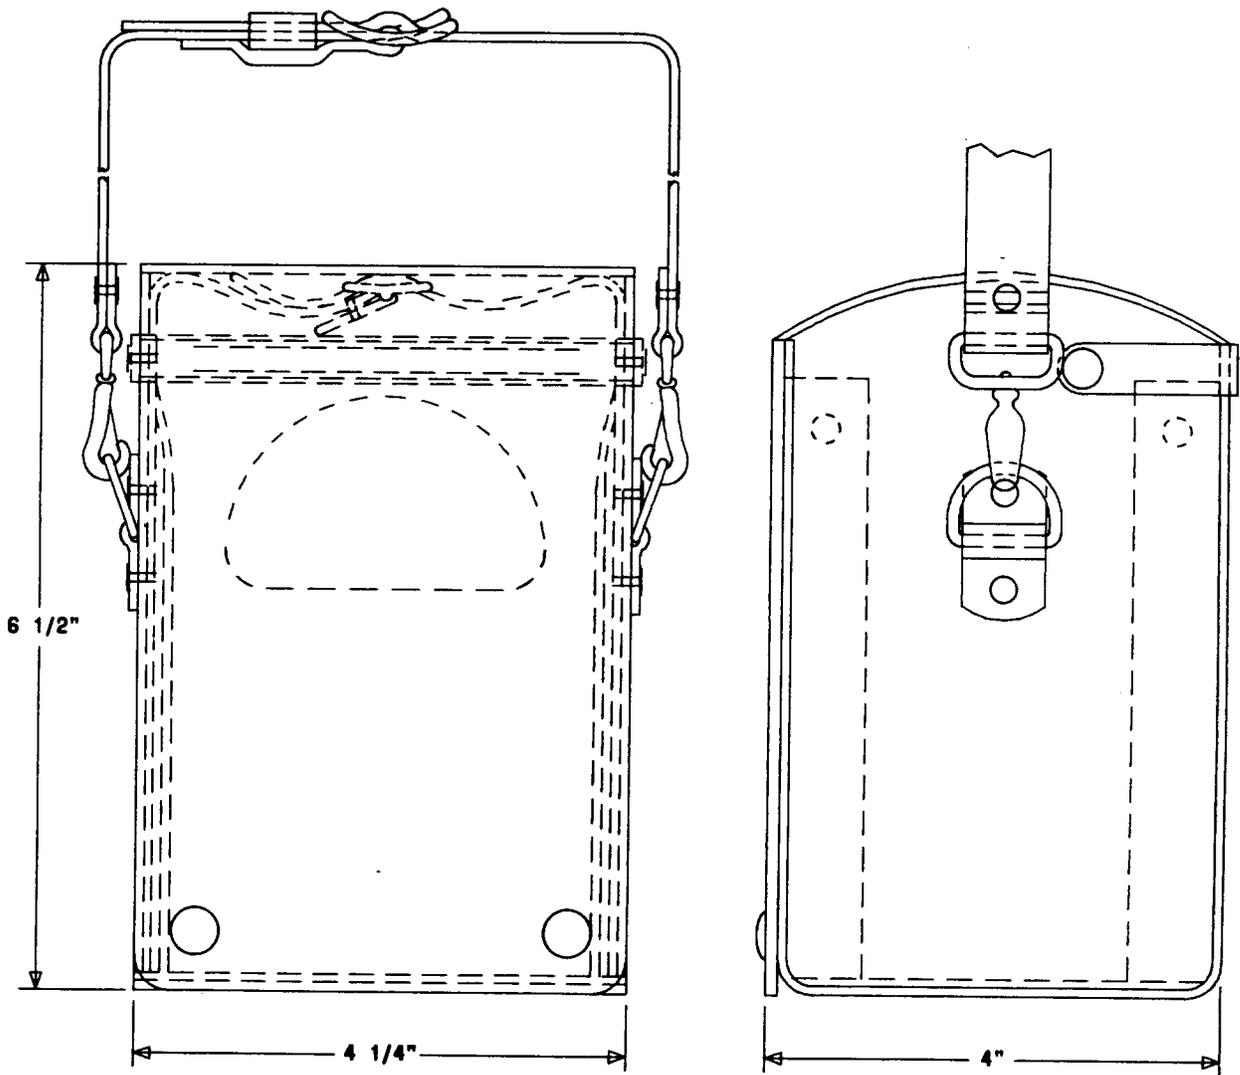


Fig. 10—KS-8456 Carrying Case

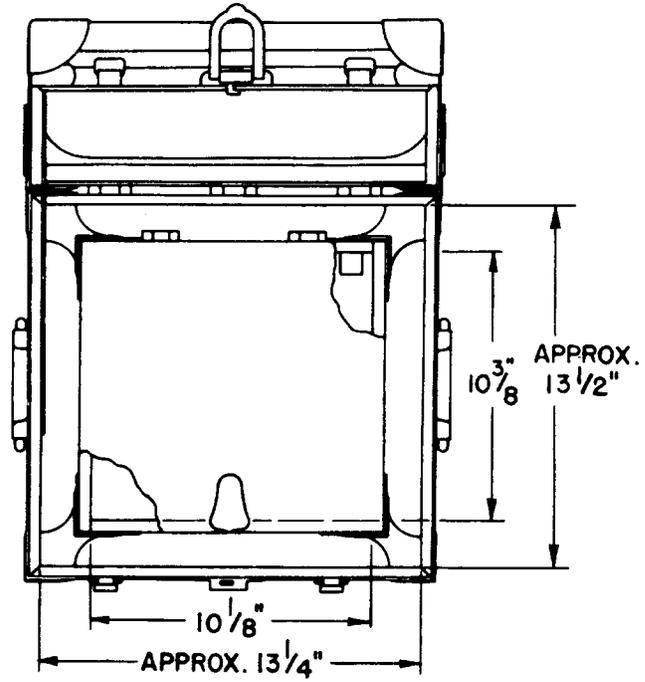


Fig. 11—KS-14131 Carrying Case