


TOOLS
HANDLES - DESCRIPTION

1. GENERAL


- 1.01 This section covers Bell System handles of both the coded and noncoded kind.
- 1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.
- 1.03 The information contained in this section supersedes the corresponding information in Sections 074-150-101 and 074-640-101.
- 1.04 For similar apparatus, see Grip, Hand, Section 074-220-132; and Holders II, Section 074-223-126.

715A

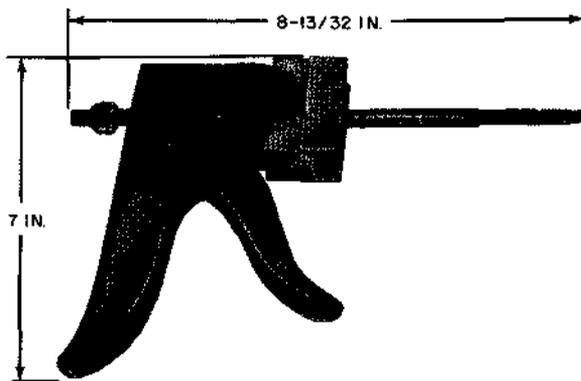


Ratchet handle. This tool forms part of 1014B tool kit. For use in conjunction with 716A and B tools when replacing coils of AF-, AG-, AJ-, and AK-type relays.

KS-5299

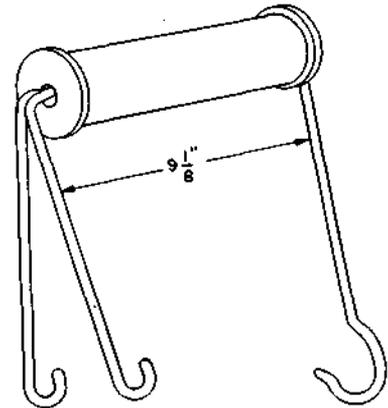

Carrying handle. For use in carrying duplex motors.

KS-16298

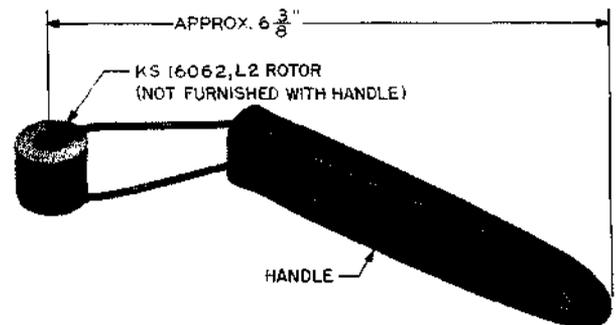

Handle having spring yoke for holding bank cleaning rotor. The KS-16062 L2 rotor used in this tool must be ordered separately. For use in cleaning step-by-step bank contacts and separators.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

KS-16884 L1

MFR DISC

HANDLE, FILE, 5-INCH, HAMMACHER SCHLEMMER & COMPANY, NO. 4 (OR EQUIVALENT).

Replaced by the No. 4 Nicholson File Company file handle (or equivalent).

HANDLE, FILE, NICHOLSON FILE COMPANY, NO. 4 (OR EQUIVALENT)

Replaces the 5-inch Hammacher Schlemmer & Company file handle. For use on files listed in Section 074-217-110.

HANDLE, GRAVER, WILLIAM DIXON, INC., NO. 15

For use on the William Dixon, Inc., No. 40 flat graver, which is used in replacing contacts on KS-13835 readers.