

TOOLS

HANDLES—DESCRIPTION

1. GENERAL

1.01 This section covers coded and noncoded Bell System handles.


1.02 This section is reissued to add the 788A1 handle. The Equipment Test List is not affected.

1.03 The information contained in this section supersedes the corresponding information in Sections 074-150-101 and 074-640-101.

1.04 For similar apparatus, see Grip, Hand, Section 074-220-132; and Holders II, Section 074-223-126.


2. DESCRIPTION OF TOOLS

715A

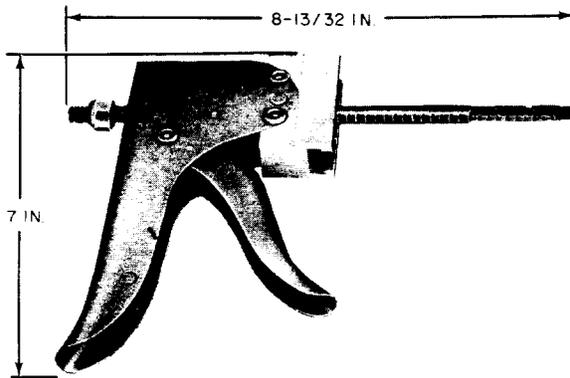


Ratchet Handle. This tool forms part of the 1014B tool kit. For use in conjunction with 716A and B tools when replacing coils of AF-, AG-, AJ-, and AK-type relays.

788A1

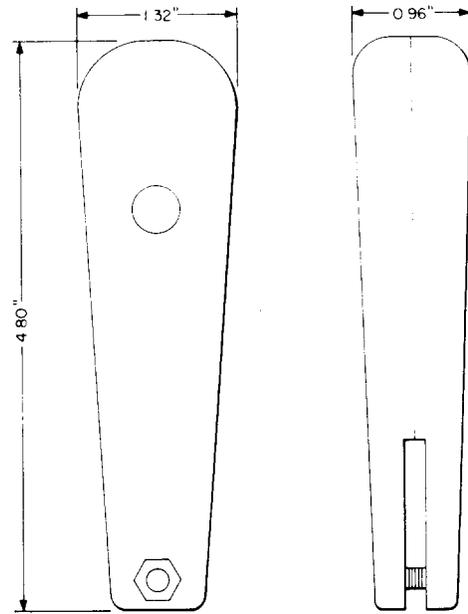

A two-piece plastic handle arranged to accommodate a No. 788 type tool for use on No. 88 type connecting blocks.

KS-5299

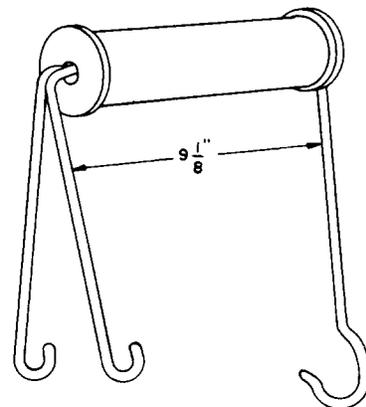


Carrying Handle. For use in carrying duplex motors.

NOTICE

Not for use or disclosure outside the
Bell System except under written agreement

SECTION 074-223-108

KS-16298

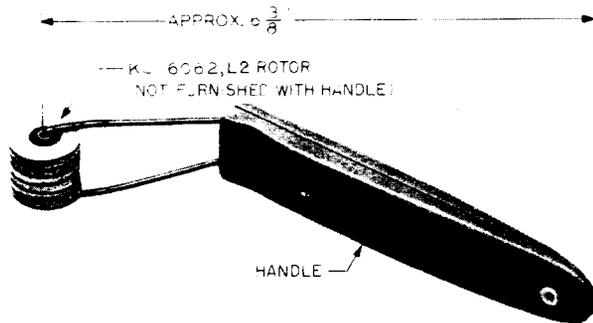

Handle having spring yoke for holding bank cleaning rotor. The KS-16062, L2, rotor used in this tool must be ordered separately. For use in cleaning step-by-step bank contacts and separators.

KS-16884, L1—MFR DISC.

HANDLE, FILE, 5-INCH, HAMMACHER SCHLEMMER & COMPANY, NO. 4 (OR EQUIVALENT).

Replaced by the No. 4 Nicholson File Company file handle (or equivalent).

HANDLE, FILE, NICHOLSON FILE COMPANY, NO. 4 (OR EQUIVALENT)

Replaces the 5-inch Hammacher Schlemmer & Company file handle. For use on files listed in Section 074-217-110.

HANDLE, GRAVER, WILLIAM DIXON, INC., NO. 15

For use on the William Dixon, Inc, No. 40 flat graver, which is used in replacing contacts on KS-13835 readers.