

HOLDERS II - DESCRIPTION
TOOLS

1. GENERAL


1.01 This section covers Bell System holder tools of both the coded and noncoded kind.

1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.

1.03 The information contained in this section supersedes the corresponding information in Sections 074-138-101, 074-141-101, 074-142-101, 074-153-101, and 074-655-101.


1.04 See tool index for another Holder practice.

651B

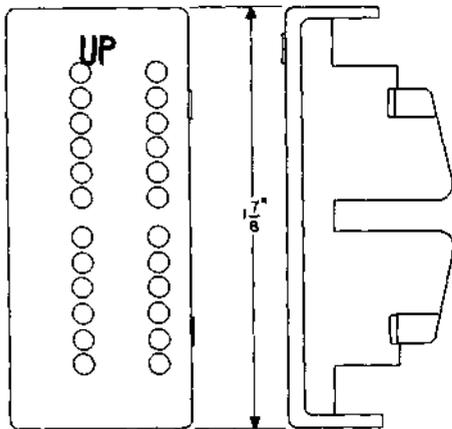


Relay contact connector holder. For use in conjunction with the 639A and 360-type tools for making connections to the fixed contacts on 24-position AJ-type relays.

651C

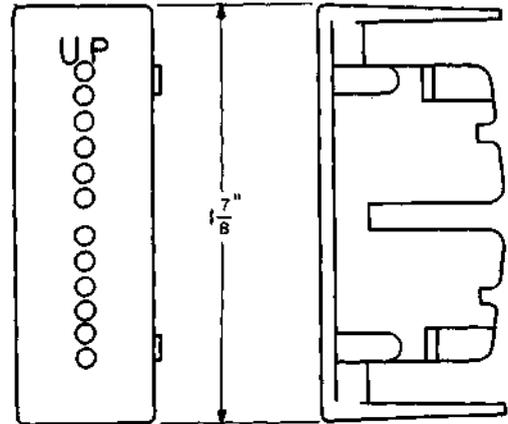

Relay contact connector holder. Used only on the initial production (less than 100,000) 12-position relays which were equipped with covers having metal frames. It is not satisfactory for use on any other relays. For use in conjunction with the 639A and 360-type tools for making connections to the fixed contacts on AF-, AG-, and 12-position AJ-type relays not equipped with a contact cover spring.

651D

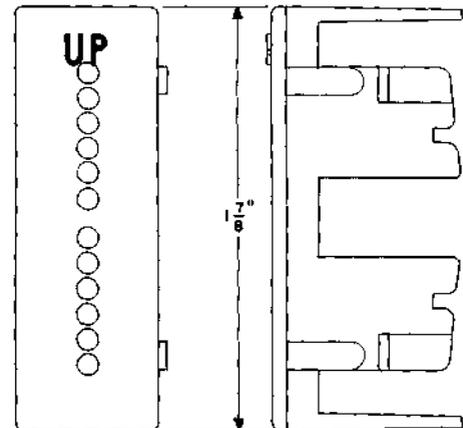


Relay contact connector holder. For use in conjunction with the 639A and 360-type tools for making connections to the fixed contacts on AF-, AG-, and 12-position AJ- and AK-type relays equipped with a contact cover spring.

NOTICE


Not for use or disclosure outside the Bell System except under written agreement

652A

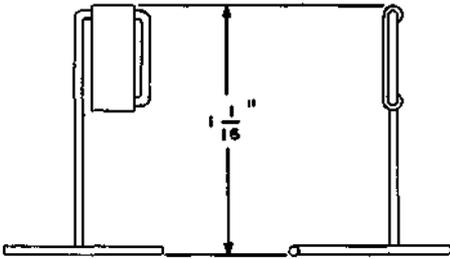


Spring holder. For holding movable springs in positions 19 to 24 when replacing cards on 24-position AJ-type relays.

652B

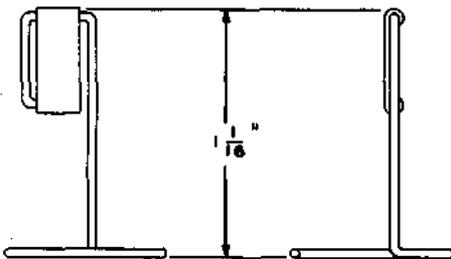


Spring holder. For holding movable springs in positions 13 to 18 when replacing cards on 24-position AJ-type relays.

653A

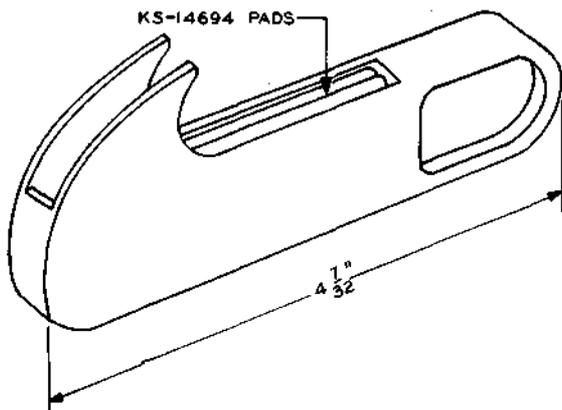


Scouring pad holder. The KS-14694 pads used in this tool must be ordered separately. For use in scouring sequence switch cams.

653B

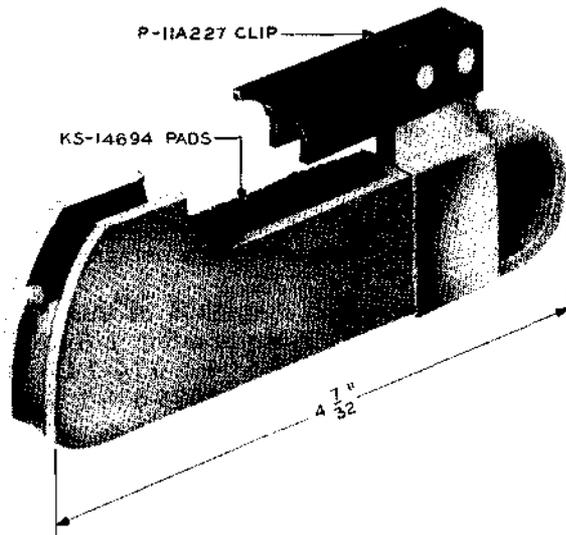


Scouring pad holder. The KS-14694 pads used in this tool must be ordered separately. For use in scouring sequence switch cams where equipment arrangements are such that the 653A tool can not be used.

675A

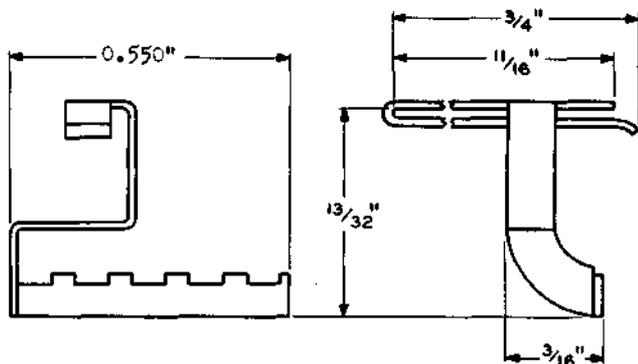


Spring holder. For holding the movable break contact springs when replacing cards or stationary contacts on the upper half of AK-type relays.

675B

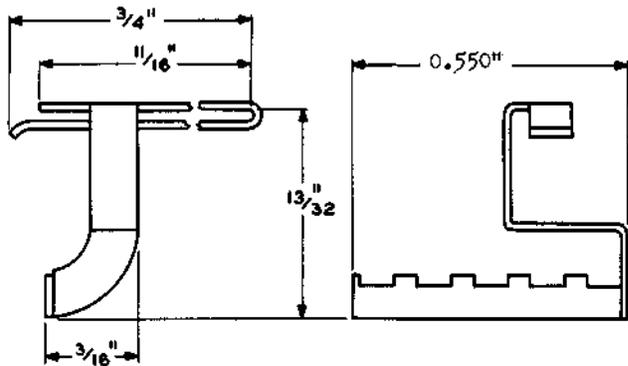


Spring holder. For holding the movable break contact springs when replacing cards or stationary contacts on the lower half of AK-type relays.

689A

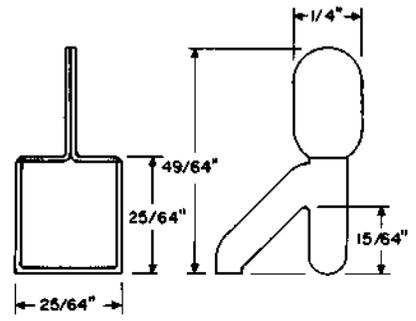


Spring holder. For use in holding the left row of movable contact springs when replacing stationary contacts of 286-, 287-, and 288-type relays.

688A

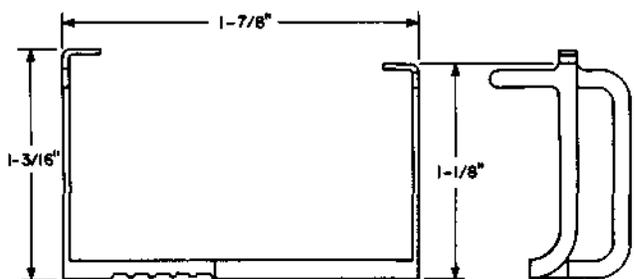


Spring holder. For holding the movable make contact springs when replacing cards or stationary contacts on the upper half of AK-type relays.

698A

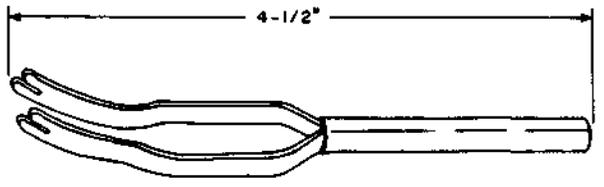


Multiple strip holder. For use in supporting the front multiple contact strip on vertical units of the 324-, 325-, and 328-type crossbar switches.

688B

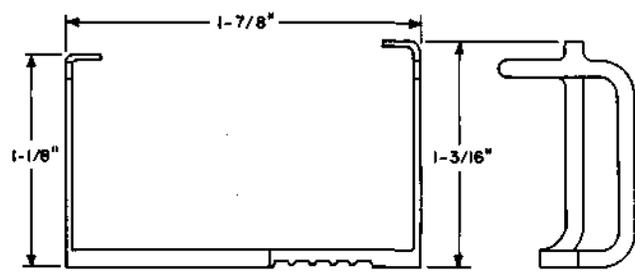


Spring holder. For holding the movable make contact springs when replacing cards or stationary contacts on the lower half of AK-type relays.

749A
749B

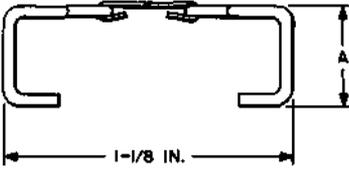

CODE	DIM. A
749A	0.392 IN.
749B	0.986 IN.

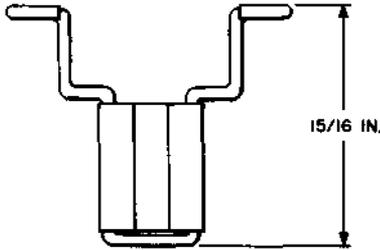


Balancing spring holders.

The 749A tool is for use in holding the balancing springs during removal of the card from BF-, BG-, and BL-type relays.

The 749B tool is for use in holding the balancing springs during removal of the card from BJ-type relays.

KS-16913 L1

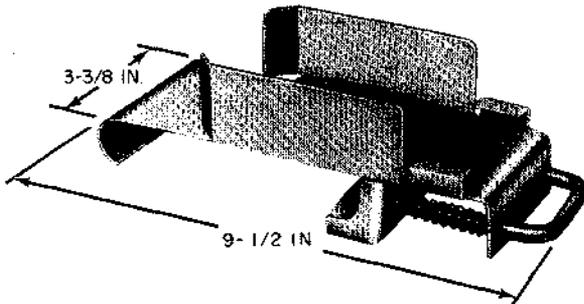


Replaces the KS-13506 holder. Provided with a clamp for mounting on a central office ladder. For holding KS-13501 L2 and similar applicators when not in actual use.

KS-20545 L1



The KS-20545 L1 holder is a molded plastic rod, tapered and slotted at one end to form jaws for retaining a strip of KS-7187 cleaning paper, which must be ordered separately. A snap ring on the opposite end of the rod captivates a sliding metal sleeve that operates the opening and closing of the jaws. The product is intended for cleaning wire spring relay and crossbar switch contacts.

R2598

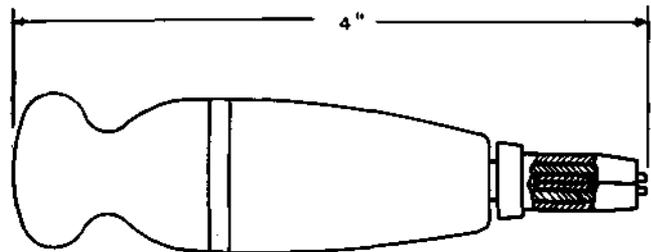

Brush holder. For use as a handle for the KS-13604 brush.

HOLDER, APCO-MOSSBERG CO., NO. 825



For use with 1/4-inch square drive supplied with Apco-Mossberg Company B50 torque screwdriver.