

## TOOLS

### HOSES, PRESSURE - DESCRIPTION

#### 1. GENERAL


1.01 This section covers noncoded Bell System pressure hoses.

1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.

1.03 The information contained in this section supersedes the corresponding information in Section 074-655-101.

#### HOSES, PRESSURE, B, C, D, AND E

(In ordering, specify B, C, D, or E, and length of hose desired.)

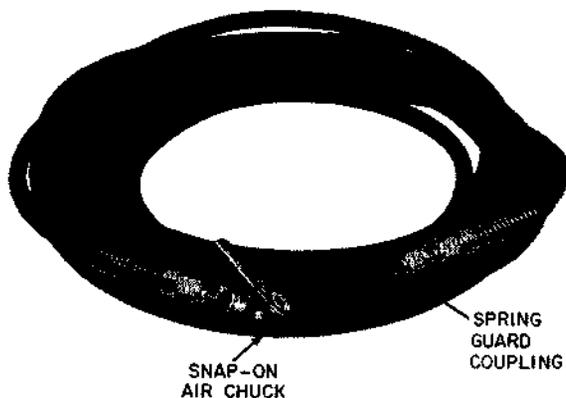

B HOSE ILLUSTRATED

The B and C pressure hoses, available in any desired length, are equipped at one end with a spring guard coupling. The other end of the B hose is equipped with a spring guard coupling and a snap-on air chuck. The other end of the C hose is equipped with a screw-on angle connector.

The D pressure hose, available in 6, 8, 12-1/2, and 25-foot lengths, is equipped at both ends with a spring guard coupling.

The E pressure hose, available in 10- and 30-foot lengths, is equipped at both ends with a spring guard coupling.

The fitting for the B pressure hose may be ordered as a replacement part as follows:

Chuck, Air

For use in making connections to various types of pressure regulators, torches, pressure testing valves, and heaters. (Specification AT-7676)

#### NOTICE

Not for use or disclosure outside the Bell System except under written agreement