


TOOLS

SCREWDRIVERS, STANDARD – DESCRIPTION

1. GENERAL

- 1.01 This section covers coded and noncoded standard form screwdrivers.
- 1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.
- 1.03 The information contained in this section supersedes the corresponding information in Sections 074-103-101, 074-760-101, and 074-760-102.
- 1.04 See tool index for other Screwdriver practices.

147

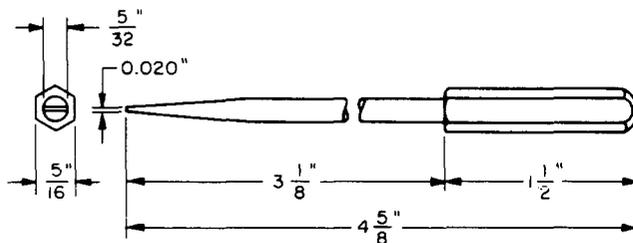


A 3-1/8 inch screwdriver. Replacement part for the 72 tool. For use on reciprocating bar-type interrupters and connecting blocks.

PHILLIPS-TYPE

Replaced by the B screwdriver.

B

In ordering, specify size desired.

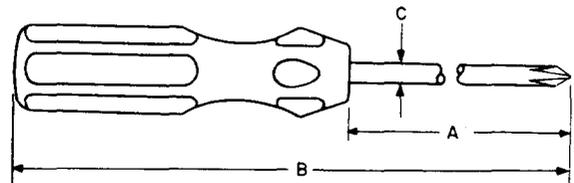

SIZE	DIMENSIONS (INCHES)			INTENDED FOR SCREW NUMBER
	A	B	C	
1	3	6-3/4	3/16	4 and smaller
2	4	8-1/2	1/4	5 to 9
3	6	11	5/16	10 to 16

The B screwdriver may be furnished with a four- or six-fluted plastic handle. Replaces the Phillips-type screwdriver. For general use when Phillips screws or bolts are employed. (Specification AT-7739)

CABINET, AECO H-24664

Replaced by the C screwdriver.

CABINET

Replaced by the C screwdriver.

H CABINET


Replaced by the D screwdriver.

NOTICE

Not for use or disclosure outside the Bell System except under written agreement

**C AND D**

In ordering, specify code and size desired.

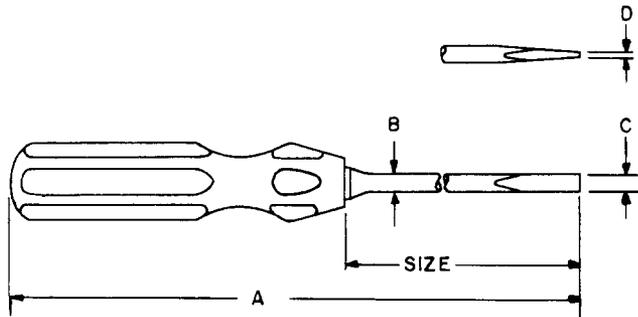

CODE	SIZE	DIMENSIONS (INCHES)				INT FOR SCREW NO.
		A	B	C	D	
C	3"	6-7/8	3/16	3/16	.025	4 to 6
C	6"	9-7/8	3/16	3/16	.030	5 to 8
D	3"	7	1/4	1/4	.034	5 to 10


Screwdrivers may be furnished with a four- or six-fluted plastic handle. The C screwdriver replaces the cabinet screwdriver and the 6-inch AECO H-24664 cabinet screwdriver. The D screwdriver replaces the H cabinet screwdriver. For general use. (Specification AT-7825)

**REGULAR**

Replaced by the E screwdriver.

**E**

In ordering, specify code and size desired.

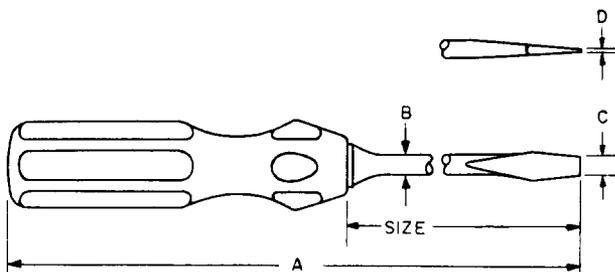

CODE	SIZE	DIMENSIONS (INCHES)				INT FOR SCREW NO.
		A	B	C	D	
E	4"	8-5/16	1/4	1/4	.040	6 to 12
E	5"	10-1/2	3/8	7/16	.050	14 to 18


The screwdrivers may be furnished with a four- or six-fluted plastic handle. Replaces the regular screwdriver. For general use. (Specification AT-7825)

**KS-2631**

**MFR DISC**


Replaced by the AT-7825 C-3 screwdriver.

**KS-6854**

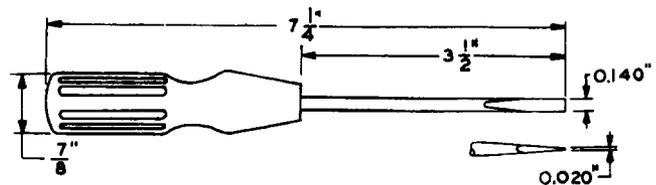

Replaces the 35 tool. Forms a component part of the 221 tool used in the maintenance of central office apparatus.

**KS-14336**

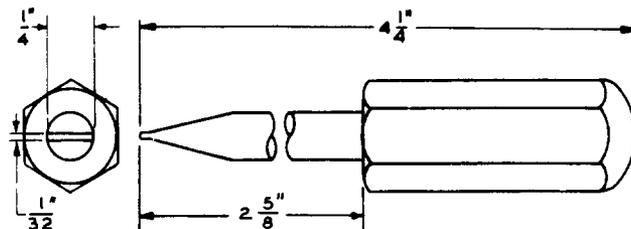

For use on the KS-13834 perforator.


**"T" HANDLE, R-58442**

Replaced by the KS-19053 L1 screwdriver.

**DOUBLE GRIP (SPEC AT-6860)**


Replaced by the KS-19053 L1 screwdriver.

**KS-19053 L1**

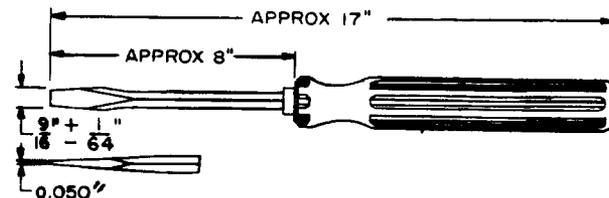


Replaces the T handle screwdriver R-58442 and the AT-6860 double grip screwdriver. For use primarily on clutches in panel central offices.

R-1324

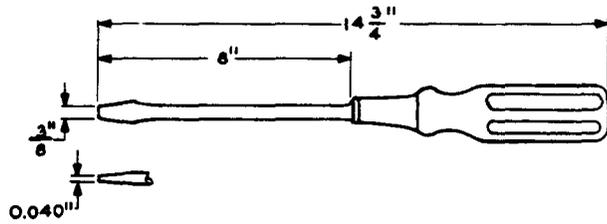


For use on the 659-type tools.

R-1626

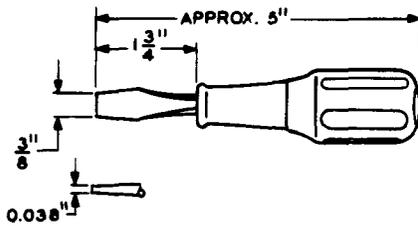


For use on operator and supervisor bentwood-type chairs.

R-8210

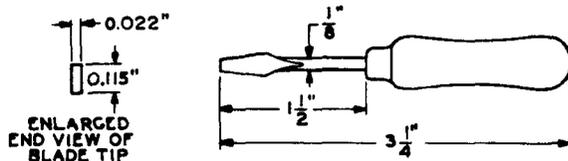

For use on the 51-type dial testers, Palmer master switches, and emergency lighting relays.

WATCHMAKERS, WILLIAM DIXON, INC., NO. 5

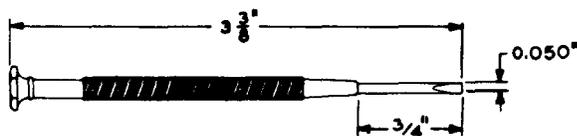


For general use.

WATCHMAKERS, WILLIAM DIXON, INC., NO. 3

The No. 3 watchmakers screwdriver has been replaced by the R-1005 screwdriver.

**JEWELERS**

In ordering, specify the number of the screwdriver and, when given, the name of the manufacturer.

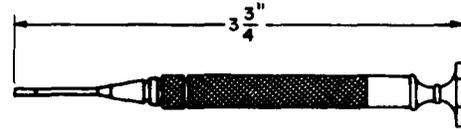

NUMBER	BLADE WIDTH (INCHES)	BLADE LENGTH (INCHES)
R-1005	0.080	3/4
L.S. Starrett Co. 555E	0.100	3/4

The R-1005 screwdriver replaces the No. 3 William Dixon watchmakers screwdriver and is for general use.


The L.S. Starrett Co. 555E screwdriver is for use on KS-12055 L4 recorder-reproducers.

**STANLEY TOOLS, 1017**




For use on the KS-13834 perforator.

**XCELITE R-3322 (WITHOUT CLIP), PARK METALWARE CO., INC.**

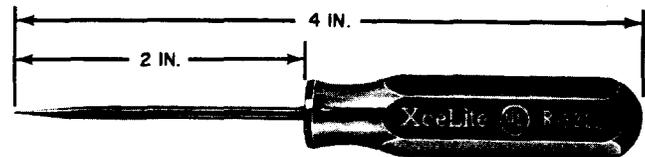

For use in adjusting potentiometers of group pilot insert units of L-Multiplex equipment.

STANLEY TOOLS, 2012

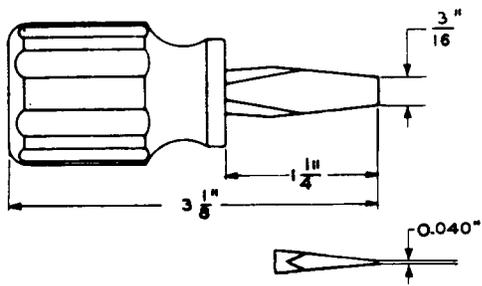

For general use.