


TOOLS

SCREWDRIVERS, TORQUE – DESCRIPTION

1. GENERAL


- 1.01 This section covers noncoded torque screwdrivers.
- 1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.
- 1.03 The information contained in this section supersedes the corresponding information in Sections 074-760-101 and 074-760-102.
- 1.04 See tool index for other Screwdriver practices.

APCO-MOSSBERG CO., B12

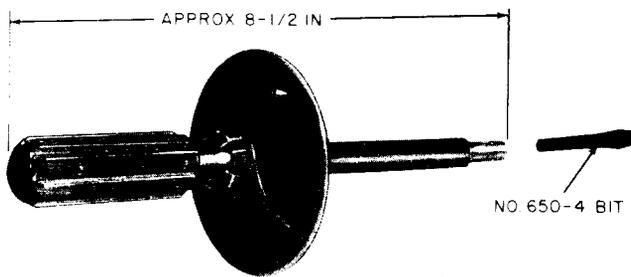


Equipped with 650-4 bit only. A torque screwdriver having a capacity of 12 inch-pounds. For use in tightening mounting screws of wire spring type relays equipped with P-19A890 flexible mountings.

APCO-MOSSBERG CO. B50 RIGHT AND B50 LEFT (B50 RIGHT ILLUSTRATED)

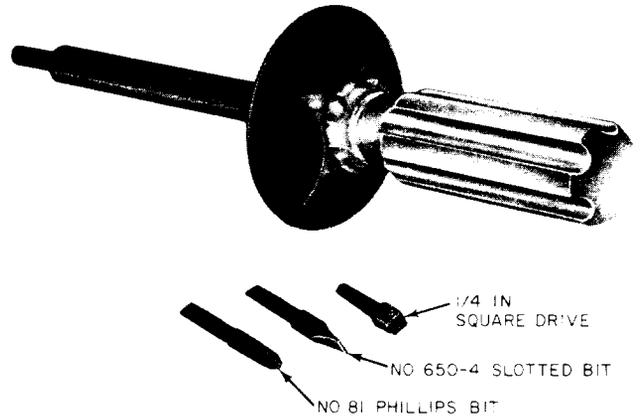

A torque screwdriver having a capacity of 50 inch-pounds. For use in tightening recording head mounting screws and capstan mounting plate screws on the KS-19125 L3, KS-19647, and KS-19829 recorders.

DRESSER INDUSTRIES, INC., RICHMONT TORQUE SCREWDRIVER MODEL PM5

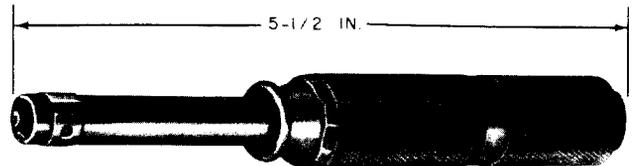

Screwdriver is set for 5 ounce-inches of torque. For use in tightening U-type relay mounting screws equipped with grommets. Screwdriver bit must be ordered separately for use with this tool. Refer to Section 074-205-114 for screwdriver bit used with this tool.

NOTICE

Not for use or disclosure outside the Bell System except under written agreement