

# **LTE Radio Access, Rel. FDD- LTE 16A, Operating Documentation, Issue 02**

## **Nokia AirScale Base Station Transmission Description**

**DN09238532**

**Issue 01**

**Approval Date 2016-06-23**

The information in this document applies solely to the hardware/software product ("Product") specified herein, and only as specified herein. Reference to "Nokia" later in this document shall mean the respective company within Nokia Group of Companies with whom you have entered into the Agreement (as defined below).

This document is intended for use by Nokia's customers ("You") only, and it may not be used except for the purposes defined in the agreement between You and Nokia ("Agreement") under which this document is distributed. No part of this document may be used, copied, reproduced, modified or transmitted in any form or means without the prior written permission of Nokia. If You have not entered into an Agreement applicable to the Product, or if that Agreement has expired or has been terminated, You may not use this document in any manner and You are obliged to return it to Nokia and destroy or delete any copies thereof.

The document has been prepared to be used by professional and properly trained personnel, and You assume full responsibility when using it. Nokia welcomes your comments as part of the process of continuous development and improvement of the documentation.

This document and its contents are provided as a convenience to You. Any information or statements concerning the suitability, capacity, fitness for purpose or performance of the Product are given solely on an "as is" and "as available" basis in this document, and Nokia reserves the right to change any such information and statements without notice. Nokia has made all reasonable efforts to ensure that the content of this document is adequate and free of material errors and omissions, and Nokia will correct errors that You identify in this document. Nokia's total liability for any errors in the document is strictly limited to the correction of such error(s). Nokia does not warrant that the use of the software in the Product will be uninterrupted or error-free.

NO WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY WARRANTY OF AVAILABILITY, ACCURACY, RELIABILITY, TITLE, NON-INFRINGEMENT, MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE, IS MADE IN RELATION TO THE CONTENT OF THIS DOCUMENT. IN NO EVENT WILL NOKIA BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO SPECIAL, DIRECT, INDIRECT, INCIDENTAL OR CONSEQUENTIAL OR ANY LOSSES, SUCH AS BUT NOT LIMITED TO LOSS OF PROFIT, REVENUE, BUSINESS INTERRUPTION, BUSINESS OPPORTUNITY OR DATA THAT MAY ARISE FROM THE USE OF THIS DOCUMENT OR THE INFORMATION IN IT, EVEN IN THE CASE OF ERRORS IN OR OMISSIONS FROM THIS DOCUMENT OR ITS CONTENT.

This document is Nokia proprietary and confidential information, which may not be distributed or disclosed to any third parties without the prior written consent of Nokia.

Nokia is a registered trademark of Nokia Corporation. Other product names mentioned in this document may be trademarks of their respective owners.

Copyright © 2016 Nokia. All rights reserved.



### **Important Notice on Product Safety**

This product may present safety risks due to laser, electricity, heat, and other sources of danger.

Only trained and qualified personnel may install, operate, maintain or otherwise handle this product and only after having carefully read the safety information applicable to this product.

The safety information is provided in the Safety Information section in the "Legal, Safety and Environmental Information" part of this document or documentation set.

Nokia is continually striving to reduce the adverse environmental effects of its products and services. We would like to encourage you as our customers and users to join us in working towards a cleaner, safer environment. Please recycle product packaging and follow the recommendations for power use and proper disposal of our products and their components.

If you should have questions regarding our Environmental Policy or any of the environmental services we offer, please contact us at Nokia for any additional information.

## Table of Contents

This document has 19 pages

	Summary of changes.....	6
1	Nokia AirScale System Module Indoor integrated transmission..... 7	
2	Ethernet Small Form-factor Pluggable (SFP)/Small Form-factor Pluggable Plus (SFP+) transceivers.....	9
3	Nokia AirScale System Module transmission cables.....	12
3.1	Ethernet electrical cables FTGR, FTCS, FTCT.....	12
3.2	Ethernet electrical cable FTGW.....	13
3.3	Ethernet optical cable FTCH.....	14
3.4	Sync cable FTSG.....	15
4	RSS-310 compliance.....	16
5	EU RoHS statement.....	17
6	CE marking.....	18
7	FCC Part 15 compliance.....	19

## List of Figures

Figure 1	ASIA transport interfaces.....	7
Figure 2	10GBase interface.....	11
Figure 3	View of FTCT, FTCS, or FTCT cable.....	13
Figure 4	View of FTCW cable.....	13
Figure 5	View of FTCH cable.....	14
Figure 6	View of FTSF cable.....	15
Figure 7	List of countries respecting EU Directive 1999/5/EC.....	18

## List of Tables

Table 1	ASIA transport interfaces - specification.....	7
Table 2	SFP variants.....	9
Table 3	SFP+ variants.....	10
Table 4	Nokia AirScale System Module transmission cables.....	12
Table 5	Multimode Flexi System Fibers.....	14

## Summary of changes

Changes between document issues are cumulative. Therefore, the latest document issue contains all changes made to previous issues.

This is the first issue of the document.

# 1 Nokia AirScale System Module Indoor integrated transmission

*AirScale Base Station transmission functions are integrated within the AirScale Common plug-in unit ASIA.*

AirScale Common unit ASIA is optimized for high-capacity Ethernet transport. The unit is equipped with three electrical 100/1000Base-T interfaces (EIF3-5) and two optional Small Form-factor Pluggable (SFP)/SFP+ slots (EIF1-2).

Figure 1 ASIA transport interfaces

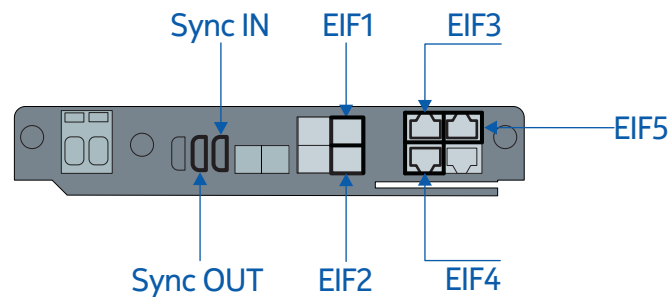


Table 1 ASIA transport interfaces - specification

Interface	Signals	Level
EIF1	1 Gbit/s 10 Gbit/s	10GBase-SR 10GBase-LR 1000Base-SX/LX/BX/ZX
EIF2	1 Gbit/s 10 Gbit/s	10GBase-SR 10GBase-LR 1000Base-SX/LX/BX/ZX
EIF3	100 Mbit/s 1 Gbit/s	100/1000Base-T
EIF4	100 Mbit/s 1 Gbit/s	100/1000Base-T
EIF5	100 Mbit/s 1 Gbit/s	100/1000Base-T

ASIA supports the following integrated transport functions:

- 3 x 100/1000 Base-T Ethernet port
- 2 x optional SFP+ (1/10GE optical)
- Ethernet based chaining and switching across up to five interfaces
- High-capacity IPsec, ASIA HW capability 5 Gbit/s (UL + DL)

ASIA supports the following synchronization functions:

- IEEE1588v2
- Synchronous Ethernet
- 1 PPS
- 2.048 MHz

## 2 Ethernet Small Form-factor Pluggable (SFP)/Small Form-factor Pluggable Plus (SFP+) transceivers

*SFP/SFP+ are two optional interfaces on ASIA that can be used for transport backhaul.*

AirScale ASIA Common unit offers two optional 1/10GE interfaces (EIF1 and EIF2) which support both Small Form-factor Pluggable (SFP) and the new Small Form-factor Pluggable Plus (SFP+) transceivers.

The following Gigabit Ethernet SFPs for optical backhaul can be ordered from Nokia:

*Table 2* SFP variants

Product name	Sales item code	Description
FOSC Optical SFP 1000Base-LX 1310nm SM <sup>1)</sup>	471880A	Optical SFP transceiver, singlemode. It supports fiber length up to 10 km on 9/125 µm. Connector type: LC.
FOSD Optical SFP 1000Base-SX 850nm MM <sup>2)</sup>	471881A	Optical SFP transceiver, multimode. It supports fiber length up to: <ul style="list-style-type: none"> <li>• 550 m on 50/125 µm</li> <li>• 300 m on 62.5/125 µm.</li> </ul>
FOS1 SFP 1000Base-BX 10km, 1490nm/1310nm	473386A	Optical SFP transceiver, singlemode. It supports fiber lengths up to 10 km on 9/125 µm.
FOS2 SFP 1000Base-BX 10km, 1310nm/1490nm	473387A	Optical SFP transceiver, singlemode. It supports fiber lengths up to 10 km on 9/125 µm.
FOS3 SFP 1000Base-BX 40km, 1490nm/1310nm	473388A	Optical SFP transceiver, singlemode. It supports fiber lengths up to 40 km on 9/125 µm.
FOS4 SFP 1000Base-BX 40km, 1310nm/1490nm	473389A	Optical SFP transceiver, singlemode. It supports fiber lengths up to 40 km on 9/125 µm.

SFP+ is a next generation Small Form-factor Pluggable transceiver, which provides support for new optical interfaces that allow a ten-times higher backhaul throughput. This is an evolutionary step towards a 1 Gbit/s single UE peak rate feature. SFP+ is the most popular socket on 10GE systems.

A combined SFP/SFP+ slot brings the benefits of the front panel space saving and cost reducing, while offering maximum flexibility with regard to the Ethernet connectivity.

Standard 1/10GE SFP/SFP+ slot provides:

- 
- 1) All FlexiBTS long-haul Gigabit Ethernet outdoor transmission cables are 9/125µm single mode fibers.
  - 2) All FlexiBTS short-haul Gigabit Ethernet outdoor transmission cables are 50/125 µm multimode fibers.

- Multi-Sourcing Agreement (MSA) compliancy
- Module detection
- SFP transceiver type validation
- Limiting amplifier support (10GBase-SR/LR)
- Basic SFP diagnostic support
- Loss of signal (LOS) detection pin support
- Field pluggability/replacability

SFP/SFP+ module requirements:

- Compliancy with the industrial temperature range from -40°C through +85°C.
- Laser Class 1 compliancy
- Extraction bail latch actuator



**Note:** Do not use SFPs with MSA direct/standard push pull, dog leg latch actuator, with plastic pull tab, or without any extraction handle. Only Nokia branded SFP+ transceivers are supported.

There are two types of 10GE interfaces that can be operated at the SFP/SFP+ slot.


Table 3 SFP+ variants

Product name	Sales item code	Description
FOTA Optical SFP+ 10GBase-SR 850nm MM <sup>3)</sup>	473471A	Optical SFP+ transceiver multimode  Up to 33 m with 62.5 μm multimode fiber  Up to 300 m with 50 μm multimode fiber  Transmission mode: full duplex
FOTB Optical SFP+ 10GBase-LR 1310nm SM <sup>4)</sup>	473472A	Optical SFP+ transceiver singlemode  Up to 10 km  Transmission mode: full duplex

3) All FlexiBTS short-haul Gigabit Ethernet outdoor transmission cables are 50/125 μm multimode fibers.

4) All FlexiBTS long-haul Gigabit Ethernet outdoor transmission cables are 9/125μm single mode fibers.

Figure 2 10GBase interface

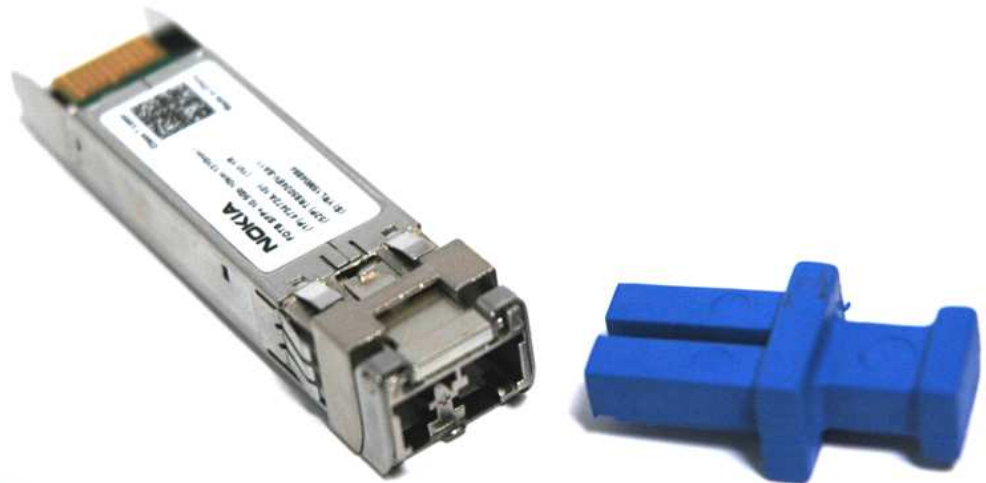

### 3 Nokia AirScale System Module transmission cables

*Layouts and pin-maps of cables used for transmission purposes in Nokia AirScale System Module. The cable code is imprinted on each cable.*



**NOTICE:** The transmission cables as well as most of the system fibers listed below are prefabricated with special rubber gaskets, which - when used with Nokia Outdoor Base Station equipment - ensure that no water or dust gets in. Those rubber gaskets may be removed when the above-mentioned cables are deployed with Nokia AirScale Indoor Base Station.


Table 4 Nokia AirScale System Module transmission cables

Cable name	Interface	Length [m]	Impedance [Ω]	Cable code	Sales item code
FTCR	Ethernet	15	100	995094	471408A
FTCS	Ethernet	30	100	995148	471717A
FTCT	Ethernet	50	100	995149	471718A
FTCW	Ethernet	4	100	995339	472347A
FTCH	Ethernet optical	15	not relevant	994972	470311A
FTSF	Synchronization	2	not relevant	995304	472509A


#### 3.1 Ethernet electrical cables FTCT, FTCS, FTCT

*Twisted pair cable for GE. One end is equipped with an RJ45 connector and a rubber gasket.*

Figure 3 View of FTCR, FTCS, or FTCT cable

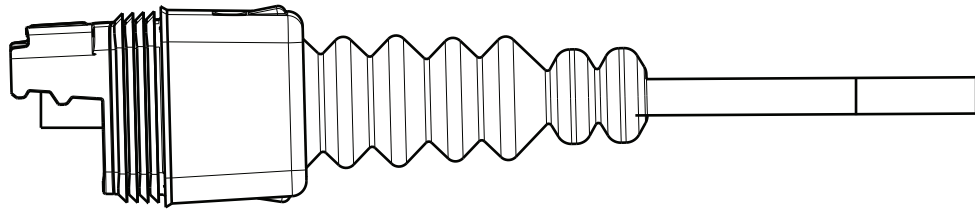

View A-A




Conn. 1 Pin no.	Pair no: color
1	2: white/orange
2	2: orange
3	3: white/green
4	1: blue
5	1: white/blue
6	3: green
7	4: white/brown
8	4: brown


### 3.2 Ethernet electrical cable FTCW

Twisted pair cable for electrical Ethernet. Both ends are equipped with RJ45 connectors and rubber gaskets.


Figure 4 View of FTCW cable

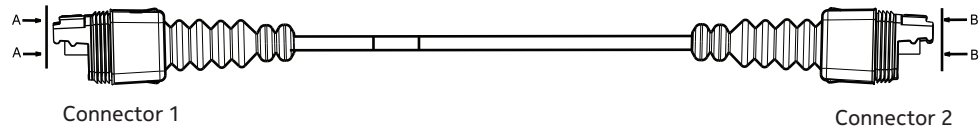

View A-A



View B-B




Conn. 1 Pin no.	Pair no: color	Conn. 2 Pin no.
1	2: white/orange	3
2	2: orange	6
3	3: white/green	1
4	1: blue	7
5	1: white/blue	8
6	3: green	2
7	4: white/brown	4
8	4: brown	5

### 3.3 Ethernet optical cable FTCH

Single mode optical fiber with 2xLC connectors and one rubber gasket.

Figure 5 View of FTCH cable

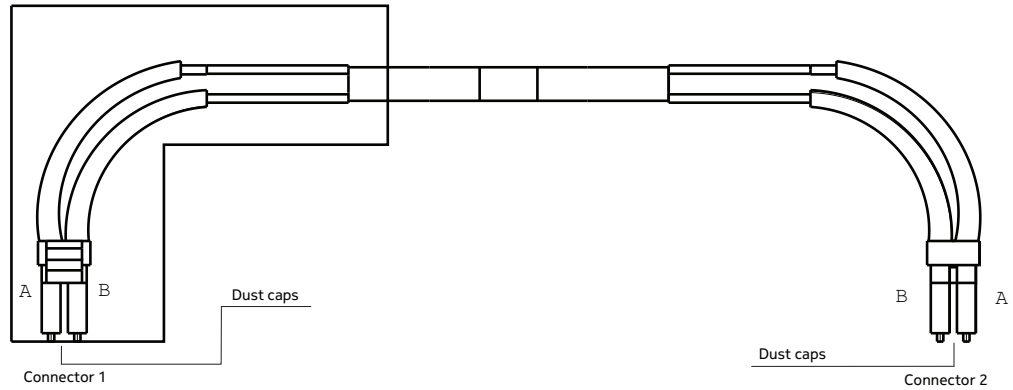

Conn. 1	Conn. 2
A	B
B	A

In principle, all prefabricated Nokia system fibers can be used for the backhaul connection. There are many variants of fibers that can be used to connect System Modules with RF Modules or Remote Radio Heads. [Table 5: Multimode Flexi System Fibers](#) presents a selection of multimode system fibers, for which the FOSD (471881A) SFP is required.


Table 5 Multimode Flexi System Fibers

Name	Length [m]	Cable code	Sales item code
FSFB	50	995092	471395A
FSFC	100	995093	471396A
FSFD	4	995109	471743A
FSFF	10	995138	471707A
FSFG	20	995139	471708A
FSFH	30	995140	471709A
FSFI	40	995141	471710A
FSFK	75	995142	471711A
FSFP	200	995143	471712A


### 3.4 Sync cable FTSF

2xHDMI connectors with rubber gaskets. The cable is used for connecting Sync In and Sync Out ports of collocated Nokia AirScale System Modules.

Figure 6 View of FTSF cable



View A-A

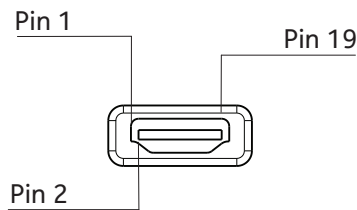

Conn. 1 Pin no.	Conn. 2 Pin no.	Pair: wire color
1: GPS_TIME_GSM_FC_OUT_H	1: GPS_TIME_GSM_FC_IN_H	TP-1: White/Blue
3: GPS_TIME_GSM_FC_OUT_L	3: GPS_TIME_GSM_FC_IN_L	TP-1: Blue/White
		TP-1G
7: PPS_OUT_H	7: GPS_PPS_GSM_FN_IN_H	TP-2: White/Orange
9: PPS_OUT_L	9: GPS_PPS_GSM_FN_IN_L	TP-2: Orange/White
11: GND	11: GND	TP-2G
2: SINGLE_ENDED_CLOCK_OUT1	2: SINGLE_ENDED_CLOCK_IN	TP-3: White/Green
4: GND	4: GND	TP-3: Green/White
6: GND	6: GND	TP-3G

## 4 RSS-310 compliance

This equipment complies with RSS-310 of Industry Canada. Operation is subject to the condition that this device does not cause harmful interference.

## 5 EU RoHS statement

This equipment complies with the European Union RoHS Directive 2011/65/EU on the restriction of the use of certain hazardous substances in electrical and electronic equipment. The directive applies to the use of lead, mercury, cadmium, hexavalent chromium, polybrominated biphenyls (PBB), and polybrominated diphenyl ethers (PBDE) in electrical and electronic equipment.

## 6 CE marking

### Declaration of Conformity with Regard to the EU Directive 1999/5/EC (R&TTE Directive)

Hereby, Nokia declares that this equipment is in compliance with the essential requirements and other relevant provisions of Directive: 1999/5/EC.

Figure 7 List of countries respecting EU Directive 1999/5/EC

<b>CE ⓘ R&amp;TTE Directive 1995/5/EC</b>							
AT	✓	FR	✓	LV	✓	LI	✓
BE	✓	DE	✓	LT	✓	RO	✓
BG	✓	GB	✓	LU	✓	SK	✓
CY	✓	GR	✓	MT	✓	SI	✓
CZ	✓	HU	✓	NL	✓	ES	✓
DK	✓	IS	✓	NO	✓	SE	✓
EE	✓	IE	✓	PL	✓	CH	✓
FI	✓	IT	✓	PT	✓	TR	✓

This declaration is only valid for configurations (combinations of software, firmware, and hardware) provided and/or supported by Nokia.

## 7 FCC Part 15 compliance

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manuals, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.