


TOOLS

WRENCHES, ADJUSTABLE – DESCRIPTION

1. GENERAL

- 1.01 This section covers coded and noncoded Bell System adjustable wrenches.
- 1.02 When this section is reissued, the reason for reissue will be listed in this paragraph.
- 1.03 The information contained in this section supersedes the corresponding information in Sections 074-126-101 and 074-860-101.
- 1.04 See tool index for other Wrench practices.


514C

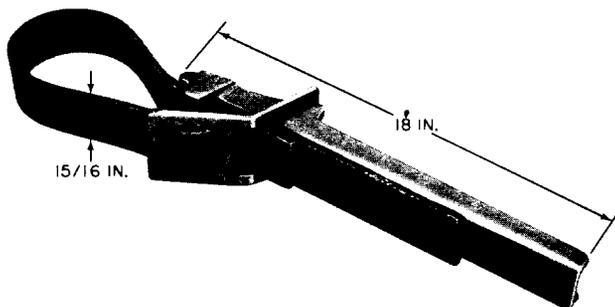

Adjustable strap wrench. For use by telephone repairmen and installers for tightening and loosening the transmitter caps on handsets.

R-1538
R-1539

In ordering, specify number of wrench desired.

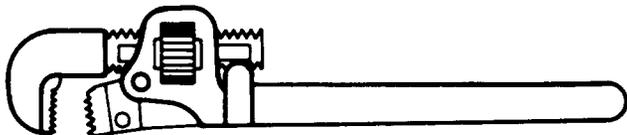


WRENCH	MAX CAPACITY	LENGTH (INCHES)
R-1538	1-inch pipe	10
R-1539	2-inch pipe	18

For use on compressor sets.

R-1542
R-2512


In ordering, specify number of wrench desired.

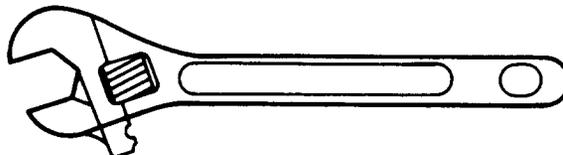

WRENCH	MAX OPENING (INCHES)	APPROX LENGTH (INCHES)
R-1542	3/4	6
R-2512	15/16	8

Adjustable wrenches. The R-1542 is for general use in power plants. The R-2512 is for general use.

R-2652

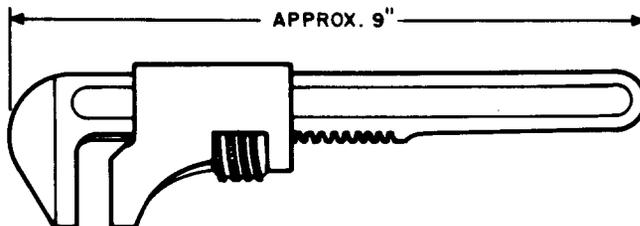


A 9-inch adjustable auto or thin monkey-type wrench. Maximum opening is 2-5/8 inches. Replaces the No. 9, Model G, Billings and Spencer wrench. For use on AMA KS-13928 cleaning cabinet.

NOTICE

Not for use or disclosure outside the Bell System except under written agreement

R-2718

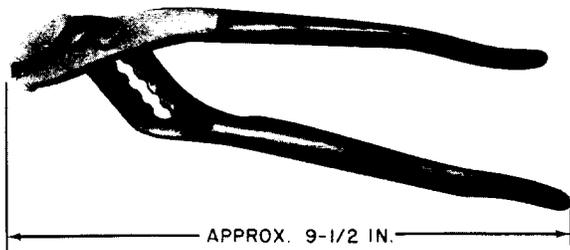


An adjustable 0 to 1-3/4 inch slip joint plier-type wrench with thin narrow jaws for use in close spaces. For use on locknuts of lamp housings of the KS-14778 photo processor.

BILLINGS AND SPENCER COMPANY, NO. 9, MODEL G


Adjustable wrench. Replaced by the R-2652 wrench.

BILLINGS AND SPENCER COMPANY NO. 90 (15-INCH)

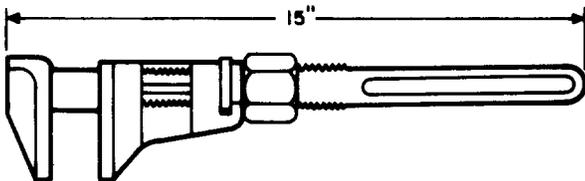

Monkey wrench. For use on the KS-16153 dehydrator.

ERIE TOOL WORKS (8-INCH)

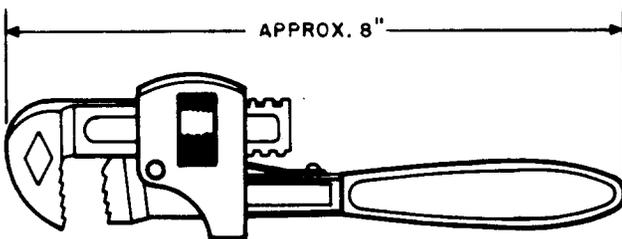

Pipe wrench. Maximum capacity is 3/4-inch pipe. Replaces the Walworth Company 8-inch Stillson pipe wrench. For use on AMA KS-13928 cleaning cabinet.

WALWORTH COMPANY (8-INCH)

Stillson pipe wrench. Replaced by the Erie Tool Works 8-inch pipe wrench.